


FACT SHEET

ENGINE VERSION

D13K460, EU6SCR Diesel engine, Euro 6, 12.8 litres, 460 hp/338 kW

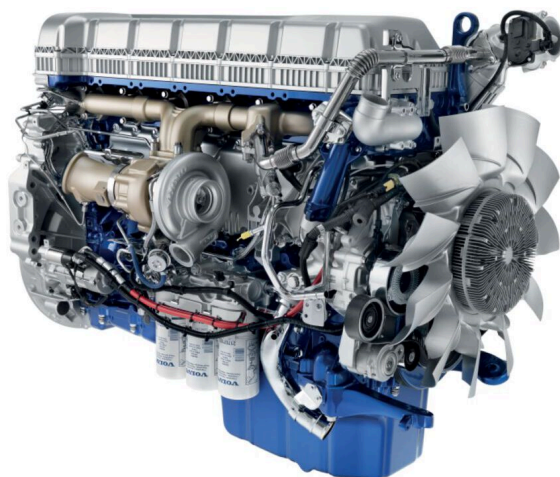

The D13K460 is a 460 hp, 12.8-litre, in-line, six-cylinder diesel engine equipped with an overhead camshaft, four valves per cylinder and common rail fuel injection. The engine meets the Euro 6 exhaust emissions requirements.

The D13K460 is designed for heavy long-haul and distribution operations. It is based on a robust and dependable design with an overhead camshaft, four valves per cylinder and precisely controlled electronic fuel injection.

The timing mechanism is located at the rear of the engine, which results in less vibration and permits the fitting of a rear-mounted power take-off.

The D13K460 is a low-emission engine in terms of both exhaust gases and noise. Euro 6 legislation reduces nitrogen oxide (NO_x) by 80% and particulate emissions by 50% compared with Euro 5. In order to meet legislative requirements, Volvo Trucks has developed an after-treatment system that, in the silencer, combines a Diesel Oxidation Catalyst (DOC), a Diesel Particulate Filter (DPF), a Selective Catalytic Reduction unit (SCR) and an Ammonia Slip Catalyst (ASC).

The D13K can be equipped with VEB+ (Volvo Engine Brake) and EPG (Exhaust Pressure Governor). These systems provide extremely high braking effect, further improving safety and reducing wear on the wheel brakes.



ENVIRONMENT

- Fuel efficient.
- Low-emission variant, Euro 6.



PRODUCTIVITY

- High engine braking effect with VEB+ and EPG (option).
- Rear-mounted power take-off with high power output (option).
- Maximum torque within a broad rev range.

FACT SHEET

ENGINE VERSION

D13K460, EU6SCR Diesel engine, Euro 6, 12.8 litres, 460 hp/338 kW

Efficient combustion for excellent driveability

The D13K is equipped with common rail fuel injection that provide high injection pressure. The combustion chamber and inlet manifold are designed for optimum combustion. The gas-fill ratio is extremely high, which contributes to the high efficiency.

The design creates a fuel-efficient engine with high power and immense torque within a broad rev range. This gives the D13K excellent driveability.

The torque curve of the D13K engine is improved compared to Euro 5, providing higher torque at even lower revs.

Fulfilling the Euro 6 standard

The additional components in the after-treatment system serve two main purposes: to improve gas flow and make sure the exhaust gases reach the after-treatment system at optimum temperature, thus ensuring that the emission level is not exceeded.

The Diesel Oxidation Catalyst (DOC) produces the nitrogen dioxide (NO₂) necessary for the Diesel Particulate Filter (DPF) to efficiently combust the particulates. In cold conditions, it also provides the heat needed for regeneration.

The Diesel Particulate Filter (DPF) collects particulate matter (PM) until it is automatically burned off during regeneration.

In the mixing zone in the Selective Catalytic Reduction unit (SCR), the exhaust gases are sprayed with AdBlue. When they reach the catalyst, the nitrogen oxides (NO_x) are efficiently transformed into harmless nitrogen gas and water.

Low noise emission at idling

The D13K meets the relevant noise emission requirements. The crankshaft and camshaft feature hydraulic vibration dampers that minimise noise and vibrations. Pre-injection of fuel is used to further dampen noise at idling.

Crankcase ventilation

The D13K offers a choice of two types of closed crankcase ventilation. CCV-C is recommended down to -25 degrees Celsius. CCV-OX is only recommended for arctic markets.

Both system promotes an extremely clean and environmentally compatible engine.

Timing and power take-off at the rear

The engine timing mechanism is located at the rear and drives the power steering pump, oil pump, fuel feed pump and air compressor. It is a compact, quiet and thoroughly sealed design that saves weight. With the timing mechanism at the rear, the engine's cooling is also improved since the flow of incoming cooling air is not obstructed.

The D13K can be equipped with a power take-off designed for propshaft operation or direct-mounted hydraulic pumps (also clutchable). PTO mounting on the engine's flywheel results in a dependable design and permits high torque levels, up to 1,000 Nm in continuous operation.

Alternative fuels

The engine is also certified for usage of HVO - EN15940 (Hydrotreated Vegetable Oil). It reduces the emissions of greenhouse gases dramatically and is a great option to support the environment.

FACT SHEET

ENGINE VERSION

D13K460, EU6SCR Diesel engine, Euro 6, 12.8 litres, 460 hp/338 kW

SPECIFICATION

Type designation.....	D13K460,EU6SCR
Max power output at 1400–1800 rpm.....	460 hp(338 kW)
Max revs.....	2100rpm
Max torque at 900–1400 rpm.....	2300Nm
No. of cylinders.....	6
Bore.....	131mm
Stroke.....	158mm
Displacement.....	12.8dm ³
Compression ratio.....	18.0:1
Exhaust brake effect (EPG) at 2300 rpm.....	200kW
Engine braking effect (VEB+) at 2300 rpm.....	375kW
Economy revs range.....	950–1400rpm
Optimum rev range.....	1100–1300rpm
Oil-change volume incl. oil filter.....	approx.33 l
Oil filters.....	2 full-flow
Cooling system, total volume.....	approx.38 l
Dry weight (base engine).....	approx.1116 kg
Exhaust after treatment system, weight.....	approx.130 kg

