


FACT SHEET

WORK LAMP ON CHASSIS BEHIND CAB

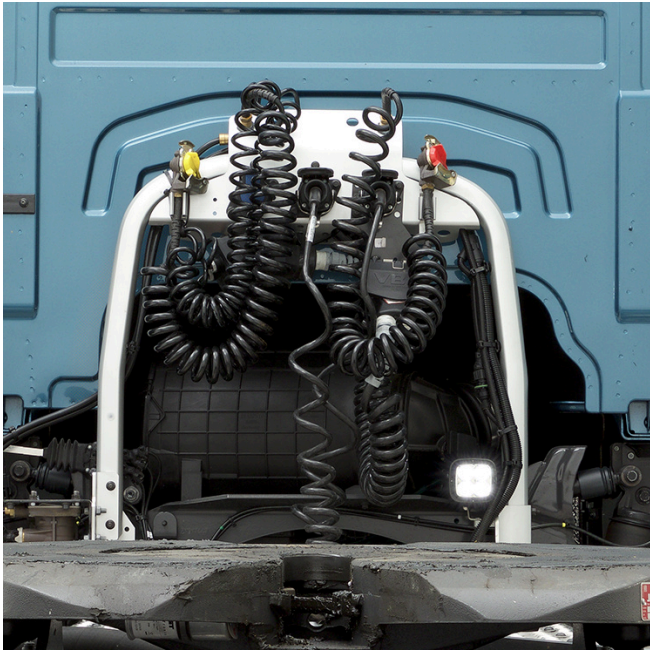

Work lamp fitted on the trailer connection arch.

Work lamp on trailer arch

The work lamp is mounted on the right-hand side of the trailer connection arch, 340 mm above the frame. The pattern of light is sufficiently broad to provide good lighting over the entire area around the fifth-wheel coupling.

The lens is bonded to the housing, which is completely waterproof and made of impact-, scratch- and corrosion-resistant black plastic. The lamp is operated via a flexible switch in the instrument panel. When the lamp is activated, the switch is illuminated by an amber LED light.



Work lamp with white LEDs.



SAFETY

- Proper lighting increases the safety when coupling a trailer.



PRODUCTIVITY

- Reduces the lead time for bodywork and ensures a high-quality installation.



UPTIME

- High reliability due to properly fused equipment.
- Cable grommets and connectors are enclosed for protection against moisture, ensuring high operational reliability.

Sales variants

WL-TA1W* White LED work lamp on trailer arch

WL-CHPK** Preparation kit for work lamp (switch with cable to frame, by gearbox)

* Available only for tractor

** Available only for rigid

Preparation kit for work lamp

A kit prepared for an easy lamp installation with the components featured below (lamp not included).

- Pre-routed cable from the fuse terminal behind the dashboard to the switch.
- Pre-routed cable with connector (from switch and ending in frame side at gearbox).
- Flexible switch with two positions (on/off).