


MODEL RANGE

FH Gas powered 6x2 Tag Tractor - Rear Air Suspension -Contact Regional Business

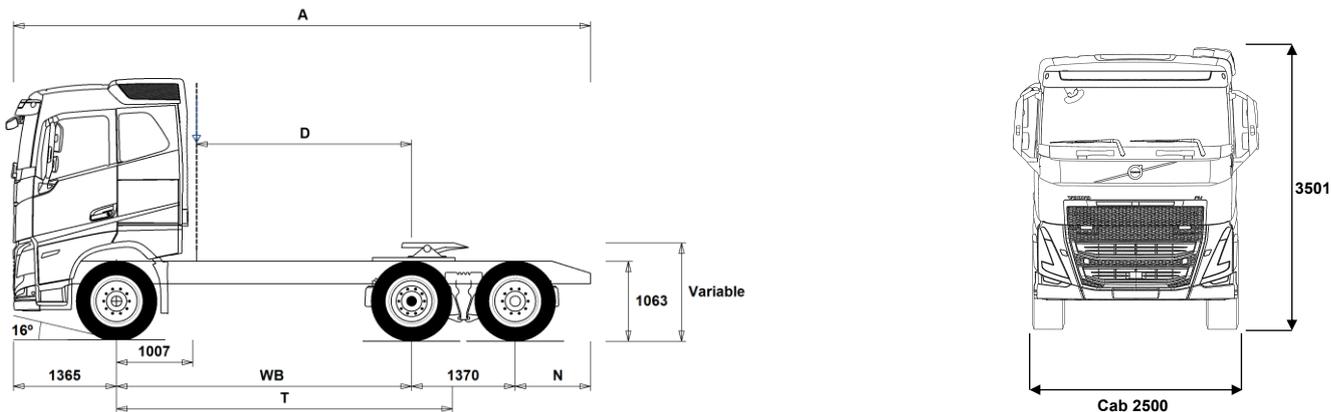

Chassis Dimensions [mm]

WB Wheelbase	3900
A Overall Chassis Length	7630
D Center of rear axle to back of cab	2843
N Rear Overhang (Min.)	805
N Rear Overhang (Max.)	995
T Theoretical Wheelbase	4441

Chassis Weights [kg]

Front Axle	5120
Rear Bogie	3525
Kerb Weight	8645

Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	15600
Turning Circle Diameter Wall to Wall	17000

Plated Weights [kg]

	Plated	Design
Gross Vehicle Weight	26000	26500
Gross Combination Weight	44000	44000
Front Axle	7500	7500
Rear Bogie	19000	19000

Important Notes

Chassis Dimensions

Cab Height: +305 mm for CAB-HSLP, -285 mm for CAB-LSLP, +450 mm for CAB-XHSL.

Front Axle to Back of Cab: +74 mm for CAB-LSLP.

D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.

Height can vary ± 20 mm for leaf and ± 10 mm for air suspension.

All dimensions are for unladen chassis and any tag axles down. Chassis height used: CHH-HIGH.

Height change when chassis height CHH-MED,FRAME300: 0 mm.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres:	315/80R22.5
Drive Axle Tyres:	315/80R22.5
Trailing/Pusher Axle Tyres:	315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary ± 3%.

Turning diameters are theoretically calculated. Tag axle used: TA-FIXED.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FH62TTLA2.

MODEL RANGE

FH Gas powered 6x2 Tag Tractor - Rear Air Suspension -Contact Regional Business

CORE COMPONENTS

- CHH-HIGH** Chassis height - High - for loading heights check the unique BEP chassis drawing attached to this quote
- CHH-MED** Chassis height - Medium - for loading heights check the unique BEP chassis drawing attached to this quote
- TAG-FIXD** Tag axle - Fixed with twin tyres on tag axle
- TAG-FIXS** Tag axle - Fixed with single tyres on tag axle
- RADT-GR** Rear air suspension, 2 axles - 1 driven/1 tag
- FH-AHSLP** Cab - Aero Globetrotter sleeper, all steel safety cage design with roof mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- FH-ALSLP** Cab - Aero low sleeper, all-steel safety cage design. Built to Swedish impact and ECE R29 regulations
- FH-ASLP** Cab - Aero sleeper, all-steel safety cage design with roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- FH-AXHSL** Cab - Aero Globetrotter XL sleeper, all steel safety cage design with roof mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- FH-HSLP6** Cab - Globetrotter, all steel safety cage design with roof mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- FH-LSLP6** Cab - Low Sleeper, all-steel safety cage design. Built to Swedish impact and ECE R29 regulations
- FH-SLP6** Cab - Sleeper, all-steel safety cage design with roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- FH-XHSL6** Cab - Globetrotter XL, all steel safety cage design with roof mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- EU6SCR** Emission level - Euro VI step E
- G13S420A** Engine - G13S420 Gas 12.8 litre developing 420hp at 14-1800rpm. Peak torque 2100Nm at 1000-1500rpm.
- G13S460A** Engine - G13S460 Gas 12.8 litre developing 460hp at 14-1800rpm. Peak torque 2300Nm at 1000-1500rpm.
- G13S500A** Engine - G13S500 Gas 12.8 litre developing 500hp at 14-1800rpm. Peak torque 2500Nm at 1000-1500rpm.
- EBR-EPGC** Engine brake type - Exhaust pressure governor for I shift gearbox
- EBR-VEB+** Engine brake type - Volvo engine brake + and exhaust pressure governor, enhanced performance from additional exhaust rocker control. Retardation 375kW
- AT2612** Gearbox - AT2612 12-speed "I-Shift" automated mechanical suitable for gross train weights up to 60 tonne only. Refer to sales engineering when used in conjunction with a PTO
- ATO2612** Gearbox - ATO2612F 12-speed I-Shift overdrive automated mechanical, suitable for gross train weights up to 100 tonne. Refer to sales engineering when used in conjunction with a PTO
- RSH1370F** Drive axle - RSH1370F 13-tonne hub reduction with differential lock - design GCW 70 tonne
- RSS1344E** Drive axle - RSS1344E single reduction with differential lock - design GCW 44 tonne
- RSS1352A** Drive axle - RSS1352A single reduction 13 tonne with differential lock - design GCW 52 tonne
- RSS1370A** Drive axle - RSS1370A single reduction 13 tonne with differential lock - design GCW 70 tonne
- RSS1370B** Drive axle - RSS1370B single reduction 13 tonne with differential lock - design GCW 70 tonne

- DRIV-EXT** Cab package - Drive Extended
- DRIV-SEL** Cab Package - Drive Select
- 1LIVIN++** Sleep & Resting Package - Living one-bed ++
- 1LIVING** Sleep & Resting Package - Living one-bed
- 1LIVING+** Sleep & Resting Package - Living one-bed +
- 2LIVIN++** Sleep & Resting Package - Living two-bed ++
- 2LIVING** Sleep & Resting Package - Living two-bed
- 2LIVING+** Sleep & Resting Package - Living two-bed +
- INFOHIGH** Media Information Platform - Medium level
- SAFE-EXT** Safety Package - Extended
- SAFE-SEL** Safety Package - Select

CHASSIS

- FST-AIR** Front suspension type - Air
- FST-PAR** Front suspension type - 2 leaf parabolic springs
- FSLs-BAS** Front suspension levelling - basic stroke
- FSLs-HI** Front suspension levelling - high stroke for demount operations - check with bodybuilder
- FAL10.0** Front axle design capacity - 10 tonne - check tyre capacity
- FAL7.5** Front axle design capacity - 7.5 tonne
- FAL8.0** Front axle design capacity - 8.0 tonne - check tyre capacity
- FAL8.5** Front axle design capacity - 8.5 tonnes
- FAL9.0** Front axle design capacity - 9.0 tonne - check tyre capacity
- FSTAB** Front anti-roll bar - Normal stiffness
- FSTAB2** Front anti-roll bar - Medium stiffness
- FSTAB3** Front anti-roll bar - High stiffness
- RAL19** Rear bogie design capacity - 19 tonne
- RAL20.5** Rear bogie design capacity - 20.5 tonne
- RAL22.5** Rear bogie design capacity - 22.5 tonne
- RSTAB1** Rear anti-roll bar - Normal stiffness
- RSTAB2** Rear anti-roll bar - Medium stiffness
- RSTAB3** Rear anti-roll bar - Stiff
- RALIM10** Rear-axle load limiter - 10 tonne
- RALIM105** Rear-axle load limiter - 10.5 tonne - speed controlled
- RALIM115** Rear-axle load limiter -11.5 tonne - speed controlled
- RALIM95** Rear-axle load limiter - 9.5 tonne
- ASF-DL1** Air suspension with 1 driving level
- ACTST-TO** Active Steering- Volvo Dynamic Steering - VDS - with extra electronic pump and torque overlay
- ASFE-BAS** Active steering feature - Basic - Volvo Dynamic Steering - VDS - only
- ASFE-OG** Active steering feature - Volvo Dynamic Steering - VDS - with stability assist - oversteer
- ASFE-PO** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings and stability assist
- ASFE-PS** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings
- PSP-VAR** Power steering pump - Variable displacement
- EBS-MED** Brake package - EBS medium including "hill" hold function
- RST-AIR** Rear suspension type - Air
- RST-AIR6**
- FRAME300** Chassis frame section external height - 300 mm
- FST6565** Chassis frame thickness - 6.5 mm web and flange
- FST7070** Chassis frame thickness - 7 mm web and flange
- FST8080** Chassis frame thickness - 8 mm web and flange
- FIL-EEEB** Chassis frame inner liner - From the end of the engine to the end of the bogie
- FIL-TXEB** Chassis frame inner liner - From gearbox member to the end of the bogie
- BBOX-EF** Battery box position - End of the frame in rear overhang
- 2BAT210C** Battery Capacity - 2 x 210 Ah - AGM Absorbent Glass-fibre Material type
- BATTAMP** Battery management - Voltage and current gauge

PACKAGES

- Standard Equipment
- Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FH Gas powered 6x2 Tag Tractor - Rear Air Suspension -Contact Regional Business

<ul style="list-style-type: none"> <input type="checkbox"/> BATTIND Battery management - Voltage, current and charge indicators <input type="checkbox"/> ADR1 ADR package for transportation of dangerous goods on road (Note does NOT include safe loading pass package if required this is quoted seperately) <input type="checkbox"/> ADR2 ADR Adaptation - For transportation of dangerous goods on the road - Note does NOT include safe loading pass package if required this is quoted separately <input type="checkbox"/> MSWI-A Battery master switch - ADR switch circuit shut down <input checked="" type="checkbox"/> MSWI-R Battery master switch - Key fob operated remote controlled <input checked="" type="checkbox"/> R170A71 Right fuel tank - 170litre aluminium diameter 710mm Min volume 170l Max volume 170l <input type="checkbox"/> ADTP-BC Adblue tank position - Behind and under the cab on the right-hand side <input checked="" type="checkbox"/> ADTP-R Adblue tank position - Chassis mounted on the right-hand side <input checked="" type="checkbox"/> ADB064 Plastic AdBlue tank - 64 litre <input checked="" type="checkbox"/> ADB065 Plastic AdBlue tank - 65 litre under/behind the cab <input checked="" type="checkbox"/> ADB112 Plastic AdBlue tank - 112 litre <input checked="" type="checkbox"/> FCAP-L Diesel and AdBlue filler cap - Locking <input checked="" type="checkbox"/> FUFF-AS Fuel filler - Anti-spill device <input type="checkbox"/> FUFF-ATS Fuel filler - Anti-spill & anti-syphon device <input type="checkbox"/> LGAS205 Liquid Natural Gas LNG tank - Left mounted 205kg <input checked="" type="checkbox"/> ESH-REAR Exhaust - Horizontal silencer - rear outlet <input type="checkbox"/> ESH-RIGH Exhaust - Horizontal silencer - right outlet <input type="checkbox"/> WHC-FOL2 Two foldable wheel chocks <input type="checkbox"/> WHCP-T Wheel chock carrier position - Outer luggage locker <input type="checkbox"/> TB-R80 Toolbox 800 mm, right side <input type="checkbox"/> CHAIN-S Snow chains <input type="checkbox"/> HOOK-SC Snow chain hooks <input checked="" type="checkbox"/> TOWF-NO1 Front towing device - One detachable - stored in cab <input type="checkbox"/> TOWF-NO2 Front towing device - Two detachable - stored in cab <input type="checkbox"/> TOWR-ONE Towing hitch attached to rear crossmember <input type="checkbox"/> TREL15 Trailer electrical connection - Single 15 pin - ADR certified <input type="checkbox"/> TREL7 7 pole - 24N trailer electrical suzie <input checked="" type="checkbox"/> TREL7-7 Trailer electrical connection - 2 x 7 pin - 24N and 24S <input type="checkbox"/> TBC-DUO Trailer brake connections - Duomatic type <input type="checkbox"/> TBC-EC Trailer brake connections - EC palm coupling connectors <input checked="" type="checkbox"/> TBC-GBR Trailer brake connections - 'C' and 'CA' type <input checked="" type="checkbox"/> TRBR-STA Stationary trailer brake control <input type="checkbox"/> TRB-STRE Stretch Brake - Automatic low speed trailer brake activation to avoid jack-knifing and improve steerability <input checked="" type="checkbox"/> RFEND-B Rear mud wings - Three piece EC approved and spray flaps <input checked="" type="checkbox"/> RFH-BAS Basic rear wing height <input type="checkbox"/> RFH-HIG High rear wing height - higher wing tops <input type="checkbox"/> RFH-LOW Lower rear wing height - shallower wing tops <input type="checkbox"/> ATANK-AL Air tanks - Aluminium <input checked="" type="checkbox"/> ATANK-ST Air tanks - Steel <input checked="" type="checkbox"/> TL-LED Rear lights - LED <input checked="" type="checkbox"/> BLIGHT-E Emergency brake light 	<ul style="list-style-type: none"> <input type="checkbox"/> WCAP Aerodynamic hub caps <input type="checkbox"/> SPWT-D Spare wheel & tyre with rear tyre pattern <input type="checkbox"/> SPWT-F Spare wheel & tyre with front tyre pattern <input type="checkbox"/> SWCP-T Spare wheel supplied temporarily strapped to chassis <input type="checkbox"/> SWCP-TP Temporary spare wheel carrier on top of chassis frame <input type="checkbox"/> JACK-12T 12 tonne bottle jack <input type="checkbox"/> JACK-15T 15 tonne bottle jack <input type="checkbox"/> JACK-20T 20 tonne bottle jack <input checked="" type="checkbox"/> TOOL-BAS Toolkit - Basic <input type="checkbox"/> TOOLKIT Toolkit - Complete <input type="checkbox"/> INFLAHOS Tyre inflation hose <input type="checkbox"/> GAUGE-TP Tyre pressure gauge <p>DRIVELINE EQUIPMENT</p> <ul style="list-style-type: none"> <input type="checkbox"/> TRAP-HD Reinforced gearbox application <input checked="" type="checkbox"/> DRM-BE Drive mode - Balanced & Economy <input type="checkbox"/> DRM-E Drive mode - Economy <input type="checkbox"/> PVT-MAP I-See Predictive Cruise Control - using map-based topography information <input checked="" type="checkbox"/> PVT-MTM I-See Predictive Cruise Control - using map-based topography information with lower operating settings <input checked="" type="checkbox"/> CRUIS-E Cruise control - with I-roll and I-cruise, controls in steering wheel <input type="checkbox"/> CRUIS-E5 Eco torque software - Improved economy mode. Fuel economy optimized cruise control for I-Save <input type="checkbox"/> AMSO-AUT Enhanced I-shift software with manual shift available in auto mode and kickdown facility on accelerator pedal <input type="checkbox"/> AVO-ENH I-Shift application software - Construction and off road applications <input type="checkbox"/> APF-ENH I-shift enhanced PTO functions <input type="checkbox"/> RET-TH Gearbox mounted retarder <input type="checkbox"/> TC-MAO Basic transmission oil cooler - air to oil <input type="checkbox"/> TC-MAOH2 Extra high performance transmission oil cooler - air to oil with front mounted radiator <input type="checkbox"/> 2COM1100 Air compressor - Two-cylinder 1100 litres per minute <input checked="" type="checkbox"/> 2COMP900 Air compressor - Two-cylinder 900 litres per minute <input type="checkbox"/> CLU-AIRC Clutchable air compressor <input type="checkbox"/> AIRIN-FR Front air intake fitted to the underside of cab engine tunnel <input checked="" type="checkbox"/> AIRIN-HI Air intake - Roof-mounted behind cab on the left-hand side <input type="checkbox"/> AIRIN-LO Low level air intake behind cab on left hand side <input type="checkbox"/> ACL1ST-S Air filter - two-stage element <input checked="" type="checkbox"/> 24A110BL Alternator capacity - 110 amp <input type="checkbox"/> 24A150BL Alternator capacity - 150 amp <input type="checkbox"/> 24A180BL Alternator capacity - 180 amp <input type="checkbox"/> 24AL110B Alternator capacity - 110 amp <input type="checkbox"/> 24AL150B Alternator capacity - 150 amp <input checked="" type="checkbox"/> CCV-OX Closed crankcase ventilation for cold markets <input type="checkbox"/> PRIM-MAN Manual priming pump <input checked="" type="checkbox"/> FUEFE2LW Large engine mounted dual fuel filter with water separator <input checked="" type="checkbox"/> EST-AID Engine starting aid -Preheating element in the air inlet manifold <input type="checkbox"/> 220EBH15 220V/1.5Kw electric engine block heater <input type="checkbox"/> PTER-DIN Engine power-take-off - Rear-mounted with DIN5462 (female) splined shaft for a close-coupled pump Models with 3 steering axles will use this to drive the steering pump (AUXPSP) <input type="checkbox"/> PTR-D Gearbox PTO for plug-in pump, 0.71xeng speed <input type="checkbox"/> PTR-DH Gearbox driven high speed PTO for one plug-in hydraulic pump <input type="checkbox"/> PTR-DM Gearbox driven medium speed PTO for one plug-in hydraulic pump
--	--

Standard Equipment Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FH Gas powered 6x2 Tag Tractor - Rear Air Suspension -Contact Regional Business

<input type="checkbox"/> PTR-F	Gearbox driven PTO with rear flange connection	<input type="checkbox"/> RTOLL-PK	Road toll PREPARATION kit for trucks operating with "Toll Collect" in Germany
<input type="checkbox"/> PTR-FH	Gearbox driven high speed PTO with SAE drive flange	<input type="checkbox"/> LOADIND	Load indicator with central dashboard display
<input type="checkbox"/> PTR-FL	Gearbox driven low speed PTO with SAE drive flange	<input type="checkbox"/> REMC-MF	Multi-functio wireless remote control
<input type="checkbox"/> PTRD-D	Gearbox driven HIGH SPEED PTO for two plug-in hydraulic pumps	<input type="checkbox"/> FIREXT3S	Fire extinguisher - 3kg mounted on the seat base
<input type="checkbox"/> PTRD-D1	PTRD-D1 Gearbox driven HIGH SPEED PTO (1 SAE flange & 1 plug-in hydraulic pump)	<input type="checkbox"/> WARNVEST	High visibility warning vest - No sleeves
<input type="checkbox"/> PTRD-D2	Gearbox driven HIGH SPEED PTO (2 SAE flanges & 1 plug-in hyd pump)	<input type="checkbox"/> AIDKIT	First aid kit - Legal demand for EU markets including delivery to EU bodybuilder
<input type="checkbox"/> PTRD-F	PTO with 1 DIN + 1 flange connection rear, manual gearbox	<input type="checkbox"/> AIDKIT1B	First aid kit - Legal demand for trucks transiting Germany
<input type="checkbox"/> HPG-F101	Gearbox mounted hydraulic pump - Parker F1-101 hydraulic pump gearbox mounted	<input type="checkbox"/> WARNLAMP	Portable warning lamp
<input type="checkbox"/> HPG-F41	Gearbox mounted hydraulic pump - Parker F1-41 gearbox mounted, fixed displacement, single flow	<input type="checkbox"/> LAMP-IN	Inspection lamp
<input type="checkbox"/> HPG-F51	Gearbox mounted hydraulic pump - Parker F1-51 gearbox mounted, fixed displacement, single flow	<input type="checkbox"/> BULBKIT	Bulb and fuse kit
<input type="checkbox"/> HPG-F61	Gearbox mounted hydraulic pump - Parker F1-61 gearbox mounted, fixed displacement, single flow	<input checked="" type="checkbox"/> WRITEPAD	Writing pad
<input type="checkbox"/> HPG-F81	Gearbox mounted hydraulic pump - Parker F1-81 gearbox mounted, fixed displacement, single flow	<input checked="" type="checkbox"/> DST-CF4	Driver seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input checked="" type="checkbox"/> STWPOS-R	Steering wheel position - RIGHT-HAND DRIVE	<input type="checkbox"/> DST-CF5	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input type="checkbox"/> STWM-LE	Steering wheel - Leather	<input type="checkbox"/> DST-CF6	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar, heat and ventilation controls with integrated seatbelt
<input type="checkbox"/> STGW-AD2	Steering wheel adjustment - Neck tilt, column height and angle	<input type="checkbox"/> DST-LUX1	Driver seat - Deluxe 1: electrical adjustment with memory function, lumbar support, heating & ventilation with integrated seatbelt
<input checked="" type="checkbox"/> STGW-ADJ	Steering wheel adjustment - Column height and angle	<input type="checkbox"/> DST-LUX2	Driver seat - Deluxe 2: electrical adjustment with memory function, lumbar support & heating with integrated seatbelt
<input checked="" type="checkbox"/> AIRBAG	Driver air bag	<input type="checkbox"/> SBD-RED	Seat belt colour - Red
<input checked="" type="checkbox"/> DRC-AMI	DPF Regeneration control switch - for manual and switching off regeneration	<input type="checkbox"/> SBPRE-DS	Driver seat belt pretensioner
<input checked="" type="checkbox"/> 1DAYDIG4	Smart tachograph - Continental VDO 4.1 version 2 - legal demand from 21/08/2023	<input type="checkbox"/> PST-BAS1	Passenger seat - Fixed non suspended fold up with seatbelt mounted on cab "B" post
<input type="checkbox"/> ARSL	Additional road speed limit - switch in dashboard	<input type="checkbox"/> PST-CF4	Passenger seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input checked="" type="checkbox"/> ESP-BAS1	Electronic Stability Control ESC	<input type="checkbox"/> PST-CF5	Passenger seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input type="checkbox"/> ESPC-RO	Additional ESC functions - Reduced / Off	<input type="checkbox"/> PST-RX1	Passenger seat - Fixed non suspended, features: 90-degree rotation and tilt function with seatbelt mounted on cab "B" post
<input type="checkbox"/> HWSS-ACB	Forward collision warning with adaptive cruise control and AEBS advanced emergency brake system	<input type="checkbox"/> PST-STD2	Passenger seat - Fixed with backrest adjustment, non suspended with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> HWSS-FCB	Forward collision warning with AEBS advanced emergency brake system	<input checked="" type="checkbox"/> PST-STD4	Passenger seat - Standard suspended with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> LSS-DW	Lane departure warning system	<input type="checkbox"/> SBPRE-PS	Passenger seat belt pretensioner
<input checked="" type="checkbox"/> LSS-DW3	Lane departure warning system with pilot assist	<input type="checkbox"/> ARMRE-BB	Armrests - Two on both driver & passenger seats
<input type="checkbox"/> LCS2		<input type="checkbox"/> ARMRE-DB	Armrests - Two on the driver seat
<input checked="" type="checkbox"/> LCS4	Side Collision Avoidance Support - passenger and driver side	<input type="checkbox"/> ARMRE-PB	Armrests - Two on the passenger seat
<input checked="" type="checkbox"/> DAS-W	Driver Alert Support system	<input type="checkbox"/> ARU-BAS	Armrest upholstery - Vinyl
<input type="checkbox"/> RSENS-W	Rain sensing windscreen wipers	<input type="checkbox"/> ARU-LEA	Armrest upholstery - Leather
<input checked="" type="checkbox"/> CU-ECC	Cab climate Unit - Electrically controlled air conditioning with sun sensor	<input checked="" type="checkbox"/> GRABHI-B	Instep cab grab handle - Steel finish
<input type="checkbox"/> CU-ECC2	Cab climate Unit - Electrically controlled air conditioning with a carbon filter, sun, mist, and air quality sensor	<input type="checkbox"/> GRABHI-L	Instep cab grab handle - Leather finish
<input checked="" type="checkbox"/> IMMOBIL	Immobiliser	<input checked="" type="checkbox"/> FMAT-RUB	Footwell floor mats - Rubber
<input type="checkbox"/> ALARM-B	Vehicle alarm - Cab only	<input type="checkbox"/> FMAT-TX2	Footwell floor mats - Two sets, Rubber and textile with an embossed pile supplied in the cab
<input type="checkbox"/> ALARM-E	Vehicle alarm - Cab plus external sensor for body/trailer	<input checked="" type="checkbox"/> LBK80F	Lower bunk - Fixed with wide middle section 815 in the centre x 2000 mm
<input type="checkbox"/> AUD-EXT	Extended audio - Amplifier	<input type="checkbox"/> LBK80FRE	Lower bunk - Electrically operated recliner with wide middle section 815 in the centre x 2000 mm
<input type="checkbox"/> PHONE-PK	Telephone preparation kit (antenna, antenna attachm. cable incl.)	<input type="checkbox"/> LBK80FRM	Lower bunk - Manually operated recliner with wide middle section 815 in the centre x 2000 mm
<input type="checkbox"/> ISUNS-BS	Side sun visor - Driver & passenger side	<input type="checkbox"/> MATL-FI	Lower mattress - Firm pocket sprung
<input checked="" type="checkbox"/> ISUNS-DS	Side sun visor - Driver-side	<input type="checkbox"/> MATL-FI4	Lower mattress - Firm, memory foam, 2000x700x130 mm
<input type="checkbox"/> ISUNF-RE	Electrically operated textile interior sun blind	<input checked="" type="checkbox"/> MATL-SF	Lower mattress - Flexi-zone semi-firm, pocket springs up to 100kg - 16 stone
<input checked="" type="checkbox"/> ISUNF-RM	Manually operated textile interior sun blind	<input type="checkbox"/> MATL-SO	Lower mattress - Flexi-zone soft, pocket springs up to 85kg - 13.5 stone
<input type="checkbox"/> CSPL-BX	Lower center dash open storage box	<input type="checkbox"/> OLMAT-BA	Mattress overlay protector - 35mm thick
<input checked="" type="checkbox"/> CSPL-BXD	Lower centre dash drawer		
<input type="checkbox"/> ADFS	Two extra DIN slots in front shelf - can be fitted with card or drawer available as an accessory		
<input checked="" type="checkbox"/> BUPALARM	Reverse alarm		
<input checked="" type="checkbox"/> Standard Equipment		<input type="checkbox"/> Optional Equipment	

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FH Gas powered 6x2 Tag Tractor - Rear Air Suspension -Contact Regional Business

<input type="checkbox"/> OLMAT-PR	Mattress overlay protector - Premium 50mm thick	<input checked="" type="checkbox"/> BUGNET	Radiator insect screen
<input type="checkbox"/> TBK60AD	Top bunk - Height adjustable foldable 600 x 1900mm	<input type="checkbox"/> CTILTP-E	Electrically operated hydraulic cab tilt
<input type="checkbox"/> TBK60F	Top bunk - Fixed foldable 600 x 1900mm	<input type="checkbox"/> CTILTP-M	Manually operated hydraulic cab tilt
<input type="checkbox"/> TBK70AD	Top bunk - Height adjustable foldable 700 x 1900mm	<input type="checkbox"/> FCABS-A	Front cab suspension - Air
<input type="checkbox"/> TBK70F	Top bunk - Fixed foldable 700 x 1900mm	<input checked="" type="checkbox"/> FCABS-M	Front cab suspension - Mechanical spring
<input type="checkbox"/> PH-CAB2	Cab parking heater -1.8kW Air to air	<input type="checkbox"/> RCABS-A	Rear cab suspension - Air
<input checked="" type="checkbox"/> PH-ENGCA	Cab parking heater - Engine and cab	<input checked="" type="checkbox"/> RCABS-M	Rear cab suspension - Mechanical spring
<input type="checkbox"/> CPC-ADV	I-ParkCool - Advanced cab parking cooler with 120V DC electrical compressor	<input checked="" type="checkbox"/> HCC-INEX	Lockable front service hatch - Activated by door lock remote
<input checked="" type="checkbox"/> SLCP-BAS	Sleeper control panel - Basic with switches for interior light, night heater, roof hatch and door lock	<input type="checkbox"/> MIRCFPCS	Mirrors - Electrically heated and operated main and wide-angle with manually adjusted passenger kerb and front mirror and position camera in nearside mirror arm
<input type="checkbox"/> SLCP-LUX	Sleeper control panel - Luxury with switches for interior light, night heater, roof hatch, door lock, alarm clock, window and radio	<input type="checkbox"/> MIRCMCP	Camera monitoring and mirrors - Electrically heated and operated main and wide-angle rear view cameras with manually adjusted passenger kerb and front mirror and passenger corner pedestrian camera.
<input type="checkbox"/> SAFE	Driver's Safe Box	<input type="checkbox"/> MIRCMS	Camera monitoring and mirrors - Electrically heated and operated main and wide-angle rear view cameras with manually adjusted passenger kerb and front mirror
<input type="checkbox"/> RUS-BAS	Rear cab upper storage - 300 mm high	<input checked="" type="checkbox"/> MIRCOMF	Mirrors - Electrically heated and operated main and wide angle and manually adjusted passenger kerb and front mirror
<input type="checkbox"/> RUS-HIG	Rear cab upper storage - 440 mm high - volume 245 litres	<input checked="" type="checkbox"/> AMIR-F20	Auxiliary front view mirror with a 200mm radius
<input type="checkbox"/> TABLE	Bunk table - Folding and height adjustable fitted on lower bunk	<input type="checkbox"/> SUNV-H	External smoke grey sunvisor
<input type="checkbox"/> REFR-RUS	Fridge - 28 litre rear upper wall mounted with dividers	<input type="checkbox"/> AD-ROOF	Cab roof deflector - Adjustable
<input type="checkbox"/> REFRIG	Fridge - 33 litre under-bunk mounted with freezer dividers	<input type="checkbox"/> AD-SIDEL	Cab side deflector - Long extension panels
<input type="checkbox"/> MICRO-PK	Microwave equipment - Wiring preparation kit for oven	<input type="checkbox"/> AD-SIDES	Cab side deflector - Short extension panels
<input type="checkbox"/> BOTH-D	Bottle holder - One under dashboard centre section	<input type="checkbox"/> HL-BHID	High intensity Bi-Xenon head lamps
<input type="checkbox"/> BOTH-DL	Bottle holders - Two. One under dashboard centre section and one mounted to the under bunk drawer	<input type="checkbox"/> HL-DBL	Bi-Xenon high intensity discharge and dynamic head lamps. Dipped beam follows the road, activated by a signal from the steering system.
<input type="checkbox"/> BOTH-L	Bottle holder - One mounted to the under bunk drawer	<input checked="" type="checkbox"/> HL-LED	Headlights - LED
<input type="checkbox"/> COFMA-PK	Coffee maker - Preparation kit.	<input type="checkbox"/> HL-LED3	Headlights - LED Adaptive high beam
<input checked="" type="checkbox"/> INLI-BAS	Interior light - White LEDs	<input checked="" type="checkbox"/> HL-CLEAN	Headlight cleaner - Washer jets
<input type="checkbox"/> INLI-NL	Interior light - White and red nightlight LEDs without dimmer	<input type="checkbox"/> HLP-ST	Headlight protection
<input type="checkbox"/> INLI-NLD	Interior light - White and red nightlight LEDs with dimmer	<input type="checkbox"/> DRIVL2	Two spot lamps
<input type="checkbox"/> ARL-FLEX	Flexible reading lamps - Two "snake" type	<input type="checkbox"/> UDRIVL	Auxiliary driving lights - Without
<input checked="" type="checkbox"/> RH-EE	Fixed tinted glass sky window with emergency exit	<input checked="" type="checkbox"/> FOGL-WC	Front fog lights
<input type="checkbox"/> RH-ER	Steel roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> CL-STAT	Static corner lights
<input type="checkbox"/> RH-ETR	Tinted glass roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> ASL-RF2	Integrated roof spotlights - Two LED aerodynamic spot lights in Globetrotter sign box
<input type="checkbox"/> RH-MTR	Tinted glass roof hatch - Manually operated, rear opening with emergency exit	<input type="checkbox"/> BEACOA2F	Roof beacons - Two front roof mounted amber LED
<input checked="" type="checkbox"/> GLAS-TIN	Cab windows - Tinted	<input type="checkbox"/> BEACOA2R	Roof beacons - Two rear roof mounted amber LED
<input type="checkbox"/> SWIND-BS	Cab side window - On both sides behind 'B' post	<input type="checkbox"/> BEACON-P	Roof beacons - switch and wiring preparation only
<input checked="" type="checkbox"/> VANMIR	Vanity mirror - In front shelf	<input type="checkbox"/> BEACONA4	Roof beacons - Four amber LED - two front/ two rear
<input type="checkbox"/> AS-FUS	Extra shelf in front compartments	<input checked="" type="checkbox"/> CABPT-R1	Single outlet for roof mounted accessories
<input type="checkbox"/> INFOT-PK	TV mounting preparation kit - Above the driver's door, includes bracket, electrical and speaker connections	<input checked="" type="checkbox"/> CABPT-R2	Twin outlets for roof mounted accessories.
CAB EXTERIOR			
<input checked="" type="checkbox"/> EXTL-BAS	Basic exterior finish - Satin Volvo badges, grey grille, instep, bumper, bumper spoiler, grille, door handles mirror housing and sunvisor if specified.	<input type="checkbox"/> SPOTP-F	Spotlamp preparation in front, max 280W
<input type="checkbox"/> EXTL-EN2	Enhanced complete painted finish - Satin Volvo badges. Main grille, instep, door handles, mirror housing, and bumper in cab colour. Aluminium step inserts. Sunvisor and bumper spoiler in cab colour if specified.	<input type="checkbox"/> SPOTP-R	Spotlamp preparation on roof, max 280W
<input type="checkbox"/> EXTL-ENH	Enhanced exterior finish - Painted grille in cab colour with grey instep, bumper, bumper spoiler, grille, door handles mirror housing and sunvisor if specified, and aluminium step inserts	<input type="checkbox"/> SPOTP-RF	Spotlamp preparation on cab roof and in cab front, max 2x280W
<input checked="" type="checkbox"/> DGLAS-H	Door glass - Hardened	<input type="checkbox"/> ROS-IL2	Preparation kit for illuminated roof sign with switch loose in cab, fit after registration
<input type="checkbox"/> DGLAS-L	Door glass - Laminated	<input type="checkbox"/> CSGN-GTR	Cab sign logo - FH "Globetrotter" or FH16 "Power"
<input checked="" type="checkbox"/> BUMP-B	Front bumper - Plastic	<input checked="" type="checkbox"/> HORN-F1S	Horn - Air single tone - chassis mounted
<input type="checkbox"/> BUMP-B2	Front bumper - Steel	<input type="checkbox"/> HORN-R2S	Horn - Air - Two roof-mounted
<input type="checkbox"/> BUMP-HD	Front bumper - Heavy duty	<input type="checkbox"/> ANT-CBR	Roof mounted antenna for CB radio, single aerial. Only Globetrotter cabs brings in extra DIN slots.
<input type="checkbox"/> BUMP-SP	Front bumper spoiler	<input type="checkbox"/> ACCBP-AP	Front, middle & rear roof mounted accessory brackets
<input type="checkbox"/> GUARD-EH	Sump and radiator guard - to protect engine and hoses	<input type="checkbox"/> ACCBP-F	Front roof mounted accessory bracket
		<input type="checkbox"/> ACCBP-FM	Front & middle roof mounted accessory brackets
		<input type="checkbox"/> ACCBP-FR	Front & rear roof mounted accessory brackets
		<input type="checkbox"/> ACCBP-M	Middle roof mounted accessory bracket
		<input type="checkbox"/> ACCBP-R	Rear roof mounted accessory bracket

Standard Equipment

Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FH Gas powered 6x2 Tag Tractor - Rear Air Suspension -Contact Regional Business

- ACCBR-RM** Rear & middle roof mounted accessory brackets
 - STUC-B** Left and right storage compartments under cab
 - STUC-L** Left storage compartment under cab
 - STUC-R** Right storage compartment under cab
 - REFS-TW** White cab conspicuity markings by packed in cab
 - REFS-TY** Yellow cab conspicuity markings by packed in cab
- SUPERSTRUCTURE PREPARATIONS**
- 5WM-ASM** Fifth wheel mount - Air operated slider with 50mm L profiles
 - 5WM-ISOM** Fifth wheel mount - 50mm L profiles with 10mm ISO plate - 60mm high above chassis frame
 - 5WM-LPRO** Fifth wheel mount - Direct to frame with inverted 'L'-profiles
 - 5WM-MASM** Fifth wheel mount - Manual slider with 50mm L profiles
 - 5WH150** Leg-height - 150 mm
 - 5WH160** Leg-height - 160 mm
 - 5WH175** Leg-height - 175mm
 - 5WH185** Leg-height - 185 mm
 - 5WH195** Leg-height - 195mm
 - 5WH200** Leg-height - 200 mm
 - 5WH205** Leg-height - 205 mm
 - 5WH210** Leg-height - 210 mm
 - 5WH220** Leg-height - 220mm
 - 5WH230** Leg-height - 230 mm
 - 5WT-FO14** Fifth wheel - Fontaine 150SP2 pressed steel
 - 5WT-FO15** Fifth wheel - Fontaine 3000 lightweight cast air operated slider - for moderate duty off-road.
 - 5WT-JO10** Fifth wheel - Jost JSK 36 pressed
 - 5WT-JO8** Fifth wheel - Jost JSK 37 cast
 - 5WT-JO9** Fifth wheel - Jost JSK 42 cast
 - 5WT-SH** Fifth wheel - SAF-Holland/+GF+ SK-S 36.20 cast
 - 5WLM-B** Maintenance - Basic fifth wheel - standard top plate
 - 5WLM-L** Maintenance - Low maintenance with nylon top plate
 - 5WL-S1** Fifthwheel lubrication - Locking mechanism and top plate
 - 5WL-S2** Fifthwheel lubrication - Locking mechanism only
 - TCIND** Trailer connection indicator - Sensors for height, kingpin and coupling lock
 - RDECK** Catwalk - Single plate and step
 - RDECK-M** Catwalk - Extended with two plates and step
 - SRWL-PK** Chassis-mounted working lamps - Side work and reverse lamp preparation and 3 position switch - Max load 280W
 - SWL-2RW** Chassis-mounted working lamps - Two white rear mounted LED lamps
 - SWL-PK** Chassis-mounted working lamps - Side work lamp preparation and 2 position switch - Max load 280W
 - WL-TA1W** Coupling light - LED White
 - WLC-H2W** Working lamp back of cab - Two white LED high mounted at the back of cab
 - WLC-PKH** Preparation kit, cables and switch for high mounted working lamps back of cab
 - WLC-PKL** Preparation kit, cables and switch for low mounted working lamps back of cab
 - WLC-PKLH** Preparation kit - cables and switch for low and high mounted working lamps back of cab.
 - ECBB-HIG** Bodybuilder module - High level body electrical centre in dash input/output module
 - ECBB-MED** Bodybuilder module - Medium level body electrical centre in dash input/output module
 - BBCHAS1** One 7-pole connector for Body builder interface
 - BBCHAS3** Three 7-pole connectors for Body builder interface
 - BEPR-T2** Body builder electrical software preparation for tipper with remote control
 - EXSTER** External steering control - Volvo dynamic steering and bodybuilder module prepared for external control system, installed and computer by bodybuilder
 - TD-LED** Trailer detection with LED sensing
- AUXL-SPK** Electrical preparation kit - wiring and switch for snow plough lights
 - TAILPRE2** Tail lift preparation kit, wireless remote operation
 - TAILPREP** Taillift preparation kit - cab switch and warning in driver display
 - AESW2** Two Body builder bistable electrical switches (marked AUX1 / AUX2)
 - AESW2PK** 2 Body builder bistable el.switches (marked AUX1/AUX2) and prep. for 4 more switches
 - AUXSW-4** Wiring for 4 extra switches (from Body builder electrical centre to switch positions)
- DELIVERY SERVICES**
- TGW-4GWL** Telematics gateway - GSM/GPRS/4G modem, LTE & WLAN
 - FMS-PK** Fleet management system gateway - Required for aftermarket telematics
 - DRUT1** Driver utility app - "My Truck" - 1 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
 - DRUT2** Driver utility app - "My Truck" - 2 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
 - DRUT3** Driver utility app - "My Truck" - 3 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
 - DRUT4** Driver utility app - "My Truck" - 4 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
 - DRUT5** Driver utility app - "My Truck" - 5 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription

Standard Equipment Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FH Gas powered 6x2 Tag Tractor - Rear Air Suspension -Contact Regional Business

Volvo Trucks. Driving Progress