
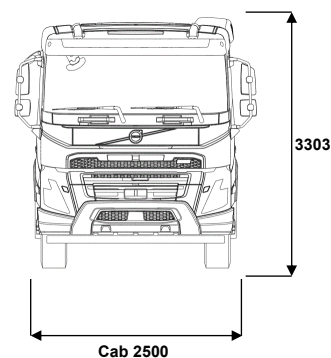


MODEL RANGE

FMX D11 66 Rigid Diesel Reaer Leaf FMX 66R 1L

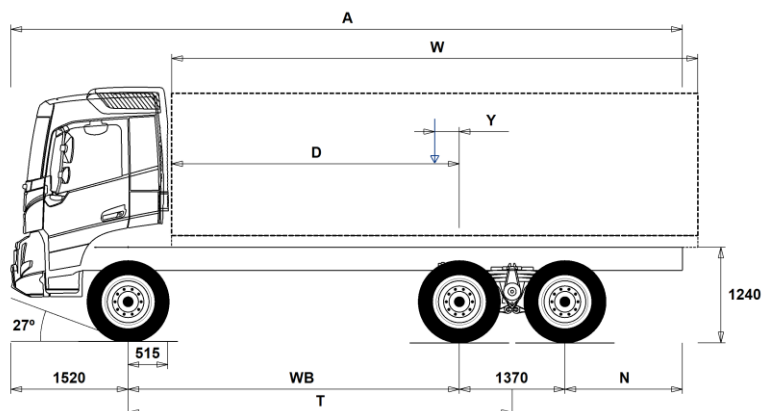

Chassis Dimensions [mm]

WB Wheelbase	3600	3700	3900	4300	4600
A Overall Chassis Length	8415	8615	8915	9565	10015
D Center of rear axle to front of body	3035	3135	3335	3735	4035
N Rear Overhang (Min.)	825	825	825	825	825
N Rear Overhang (Max.)	1925	2025	2125	2375	2525
T Theoretical Wheelbase	4285	4385	4585	4985	5285
Y Center of Gravity for Payload (Min.)	96	114	149	217	268
Y Center of Gravity for Payload (Max.)	96	114	149	217	268
W Body Length (Min.)	5877	6042	6372	7035	7533
W Body Length (Max.)	5877	6042	6372	7035	7533

Chassis Weights [kg]

Front Axle	5180	5185	5195	5225	5245
Rear Bogie	3865	3870	3890	3925	3940
Kerb Weight	9045	9055	9085	9150	9185
Payload (including body, driver, fuel, etc.)	20955	20945	20915	20850	20815

Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	16100	16400	17100	18400	19400
Turning Circle Diameter Wall to Wall	17500	17800	18500	19800	20800

Plated Weights [kg]

	Design
Gross Vehicle Weight	30000
Gross Combination Weight	60000
Front Axle	9000
Rear Bogie	21000

Important Notes

Chassis Dimensions

Cab Height: +328 mm for CAB-HSLP, -262 mm for CAB-LDAY, -262 mm for CAB-LSLP, +16 mm for CAB-SLP.
 Front Axle to Back of Cab: +431 mm for CAB-HSLP and CAB-SLP, -69 mm for CAB-LDAY, +425 mm for CAB-LSLP.
 D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.
 Height can vary ± 20 mm for leaf and ± 10 mm for air suspension.
 All dimensions are for unladen chassis and any tag axles down.
 Rear overhang used for vehicle weight calculation is the maximum rear overhang (N Max.) for selected wheelbase.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres: 315/80R22.5
 Drive Axle Tyres: 315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary $\pm 3\%$.

Turning diameters are theoretically calculated.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FMX66R1L.

MODEL RANGE

FMX D11 66 Rigid Diesel Reaer Leaf FMX 66R 1L

Transport operation

- **RC-ROUGH** Rough road conditions: frequent driving on poorly maintained surfaced roads, hard-packed sand or gravel, or other surfaces of good or bad quality.
- **RC-VROUG** Very rough road conditions: more than 5% of the driven distance is on extremely poor roads or off-road.
- **TIPP-PRE** Tipper vehicle preparation
- **UNIFORM** Basic platform vehicle

Core components

- **RADD-BR** Rear leaf suspension - two axles, both driving (B-ride)
- **RADD-TR1** Rear leaf suspension - two axles, both driving (max. technical bogie load 26 tonnes)
- **RADD-TR2** Rear leaf suspension - two axles, both driving (max. technical bogie load 32 tonnes)
- **CDCOPREP** Preparation kit for day cab cut-out (free text CA needed)
- **FMX-CREW** FMX crew cab (free-text CA needed)
- **FMX-DAY6** FMX day cab
- **FMX-HSL6** FMX Globetrotter, high sleeper cab
- **FMX-LDA6** FMX low day cab
- **FMX-LSL6** FMX low sleeper cab
- **FMX-SLP6** FMX sleeper cab
- **EU6SCR** Euro 6 with SCR, particulate filter and EGR, Turbo-S
- **D11S330A** Diesel engine, Euro 6, 10.8 litres, 330 hp/246 kW, 1600 Nm
- **D11S380A** Diesel engine, Euro 6, 10.8 litres, 380 hp/279 kW, 1800 Nm
- **D11S430A** Diesel engine, Euro 6, 10.8 litres, 430 hp/317 kW, 2050 Nm
- **D11S460A** Diesel engine, Euro 6, 10.8 litres, 460 hp/338 kW, 2200 Nm
- **D11K330** Diesel engine, Euro 6, 10.8 litres, 330 hp/243 kW
- **D11K380** Diesel engine, Euro 6, 10.8 litres, 380 hp/280 kW
- **D11K430** Diesel engine, Euro 6, 10.8 litres, 430 hp/317 kW
- **D11K460** Diesel engine, Euro 6, 10.8 litres, 460 hp/338 kW
- **DIESEL** Diesel fuel
- **DIESEL-B** Fuel blends up to 100% biodiesel
- **EBR-EPG** Engine brake with exhaust pressure governor
- **EBR-EPGC** Exhaust pressure governor with Volvo compression brake
- **EBR-VEB** Volvo Engine Brake, VEB (compression brake with exhaust pressure governor, EPG)
- **AT2612** I-Shift automated 12-speed gearbox, 2600 Nm
- **ATO2612** I-Shift automated 12-speed gearbox with overdrive, 2600 Nm
- **PT2106** Powertronic 6-speed powershift gearbox, 2100 Nm
- **RTH2610B** Rear hub reduction tandem axle - bogie load 26 tonnes, GCW 100 tonnes, 4 planet gears
- **RTH2610F** Rear hub reduction tandem axle - bogie load 26 tonnes, GCW 100 tonnes, version F
- **RTH3210F** Rear hub reduction tandem axle - bogie load 32 tonnes, GCW 100 tonnes, version F
- **RTH3212F** Rear hub reduction tandem axle - bogie load 32 tonnes, GCW 120 tonnes, version F
- **RTH3312** Rear hub reduction tandem axle - bogie load 33 tonnes, GCW 120 tonnes

Packages

- **DRIV-EXT** Driver convenience package, Extended
- **DRIV-SEL** Driver convenience package, Selected
- **1LIVINFM** Living package, 1 bed (FM)
- **2LIVINFM** Living package, 2 beds (FM)
- **INFOHIGH** Information package, high (with side display)
- **OFFROADD** Construction package for FM/FMX day cab
- **OFFROADS** Construction package for sleeper cab

Chassis

- **FST-PAR3** Three-leaf front parabolic springs (stiffer than normal)
- **FAL10.0** Front axle load 10.0 tonnes
- **FAL8.0** Front axle load 8.0 tonnes
- **FAL9.0** Front axle load 9.0 tonnes
- **FSTAB** Front anti-roll bar, normal stiffness

- **RAL21** Rear axles load 21 tonnes
- **RAL26** Rear axles load 26 tonnes
- **RAL32** Rear axles load 32 tonnes
- **RSTAB1** Rear anti-roll bar, normal stiffness
- **RSAP2** Heavy duty rear suspension application (with reinforcements)
- **PSP-FIX** Power steering pump with fixed displacement
- **PSP-VAR** Power steering pump with variable displacement
- **EBS-MED** EBS (Electronic Braking System), Medium package
- **EBS-STD** EBS (Electronic Braking System), Standard package
- **AUXPARK** Extra parking brake on one axle
- **RST-MUL** Rear multi-leaf springs
- **RST-PAR1** Rear parabolic leaf springs
- **FST7070** Frame thickness - web 7.0 mm / flange 7.0 mm
- **FST8080** Frame thickness - web 8.0 mm / flange 8.0 mm
- **FIL-EEEB** Frame inner liner from end of engine to end of bogie
- **FIL-EEEF** Frame inner liner from end of engine to end of frame
- **FIL-FBEB** Frame inner liner from front of bogie to end of bogie
- **FIL-FBEF** Frame inner liner from front of bogie to end of frame
- **FIL-TXEB** Frame inner liner from transmission cross member to end of bogie
- **FIL-TXEF** Frame inner liner from transmission cross member to end of frame
- **BBOX-L** Battery box on left-hand side
- **2BAT210B** Gel batteries, 2x210 Ah
- **2BAT210C** AGM batteries, 2x210 Ah
- **BATTAMP** Battery voltmeter and ammeter
- **BATTIND** Battery voltmeter, ammeter and battery status gauge with visual alerts
- **MSWI-C** Main switch on chassis
- **MSWI-R** Key remote controlled main switch
- **R315A56** Right 315-litre, D-shaped aluminium fuel tank, 560 mm high
Min volume 255l
Max volume 630l
- **ADTP-L** AdBlue tank on left hand side
- **ADTP-R** AdBlue tank on right hand side
- **ADB048** AdBlue tank: usable volume 48 litres, 560 mm high, mounted on chassis side
- **ADB064** AdBlue tank: usable volume 64 litres, 710 mm high, mounted on chassis side
- **ADB068** AdBlue tank: usable volume 68 litres, 560 mm high, mounted on chassis side
- **ADB083** AdBlue tank: usable volume 83 litres, 560 mm high, mounted on chassis side
- **ADB090** AdBlue tank: usable volume 90 litres, 710 mm high, mounted on chassis side
- **ADB112** AdBlue tank: usable volume 112 litres, 710 mm high, mounted on chassis side
- **FCAP-L** Lockable diesel and AdBlue filler caps
- **FUFF-AS** Fuel filling anti-spillage device
- **FUFF-ATS** Fuel filling anti-theft and anti-spillage device
- **ESH-REAR** Horizontal silencer, rear exhaust outlet
- **ESH-VERT** Horizontal silencer, vertical exhaust outlet on right-hand side
- **EXST-SSP** Vertical exhaust top pipe, bright polished stainless steel
- **EXST-ST** Vertical exhaust top pipe, aluminised steel
- **WHC-FIX2** Two non-collapsible wheel chocks
- **WHC-FOL2** Two collapsible wheel chocks
- **WHCP-F** Wheel chock holder in the front part of the vehicle
- **WHCP-M** Wheel chock holder in the middle part of the vehicle
- **WHCP-R** Wheel chock holder in the rear part of the vehicle
- **WHCP-T** Wheel chock holder by-packed in cab outer luggage compartment
- **TB-L80** Tool box on left-hand side, 205-litre - width 730 mm, height 590, depth 595 mm

■ Standard Equipment

□ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FMX D11 66 Rigid Diesel Reaer Leaf FMX 66R 1L

- **TB-R80** Tool box on right-hand side, 205-litre - width 730 mm, height 590, depth 595 mm
- **CHAIN-S** Snow chains
- **HOOK-SC** Snow chain hooks
- **TOWF-HD1** One heavy-duty front towing device
- **TOWMBRH1** Towing member, high-mounted in centre of frame
- **TOWMBRL1** Towing member, low-mounted under frame
- **TOWMBRM** Towing member, medium-mounted in line with lower frame flange
- **RFEC-S** Straight-cut rear frame end
- **RFEC-U** Upper corner cut on rear frame end (for e.g. tipper, refuse and hook lift applications)
- **C-RI4040** Coupling Ringfeder 4040A G-150
- **C-RI5050** Coupling Ringfeder 5050A G-150
- **C-RO400G** Coupling Rockinger 400 G-150
- **C-RO50** Coupling Rockinger 50 mm
- **C-VBG520** Coupling VBG 5200D
- **C-VBG795** Coupling VBG 795V
- **TOWR-ONE** Brace that can be used for towing in specific situations. The brace is mounted on the end cross member, and if the end cross member is thinner than 8 mm, it will be reinforced. The brace includes a lockable pin and is dimensioned for a 3-tonne centre-axle trailer or a 10-tonne articulated drawbar trailer. It may only be used for short-distance, on-site transport in confined areas and at speeds of a maximum of 30 km/h.
- **TREL-PK** Trailer electrical preparation kit (chassis/cab wiring)
- **TREL15** 15-pin trailer connection (ADR certified)
- **TREL7-7** 2x7-pin trailer connection (ISO 24N+24S, non-ADR)
- **TBC-DUO** Trailer brake connection, Duomatic
- **TBC-EC** Trailer brake connection, European Community
- **TRBR-STA** Stationary trailer brake check
- **TRB-STRE** Stretch brake, trailer brake activation at low speeds to avoid jack-knifing and improve stability
- **RFEND-B** Rear 3-piece mudguards (anti-spray) on all rear axles
- **RFEND-T** Transport mudguard
- **RFH-BAS** Basic mudguard installation height on 2nd front axle and rear axles
- **RFH-HIG** High mudguard installation height on 2nd front axle and rear axles
- **RFH-LOW** Low mudguard installation height on 2nd front axle and rear axles
- **TL-LED** LED tail lamps (tail light, exterior marker light, brake light, hazard warning light, reverse light, rear fog light, licence plate light and reflector)
- **BLIGHT-E** Flashing brake lights will automatically activate in emergency braking. The flashing frequency is 4 Hz and emergency braking is detected if speed exceeds 50 km/h and retardation is 4 m/s² or more. The function deactivates when retardation is less than 2.5 m/s².
- **FRACLOS** Frame end closing

Rims and tyres

- **RT-STEEL** Steel rims on all axles
- **SPWT-D** Spare driving wheel
- **SPWT-F** Spare front wheel
- **SWCP-R** Spare wheel carrier mounted behind rear axle
- **SWCP-T** Spare wheel transport-mounted on top of frame
- **SWCP-TP** Spare wheel and carrier transport-mounted on top of frame
- **JACK-20T** Hydraulic jack, 20 tonnes. Low manual pumping force facilitates use in uncomfortable positions. Has a release valve, which permits safe, easy and precise control over rate of lowering and a filter in the oil reservoir gives protection from contamination.
For FM: Height 190-325 mm, weight 10.5 kg

For FH: height 240-467 mm, weight 13.3. kg

- **TOOL-BAS** This kit consists of a tool bag (case) including the following tools:
 - Combination screwdriver.
 - 1 screwdriver handle
 - 1 blade, Phillips/flat blade
 - 1 blade, Torx T10/Torx T20
 - 1 blade, Torx T25/Torx T27
 - 1 blade, Torx T30/Torx T40
 - Socket wrench.
- **TOOLKIT** This kit consists of a tool bag (case) including the following tools:
 - Combination screwdriver.
 - 1 screwdriver handle
 - 1 blade, Phillips/flat blade
 - 1 blade, Torx T10/Torx T20
 - 1 blade, Torx T25/Torx T27
 - 1 blade, Torx T30/Torx T40
 - Socket wrench.
 - Adjustable pliers.
 - Allen key.
 - Adjustable spanner.
 - Hammer.

- **INFLAHOS** Tyre inflation hose 18 m. The air is supplied by a chassis-mounted pneumatic outlet (must be ordered separately).

- **GAUGE-TP** Tyre pressure gauge

Powertrain equipment

- **TRAP-HD** Reinforced gearbox range housing
- **DRM-BE** I-Shift drive modes Economy, Standard and Performance
- **DRM-E** I-Shift drive mode Economy
- **PVT-MAP** I-See
- **PVT-MTM** I-See
- **CRUIS-E** I-Cruise cruise control, I-Roll included
- **AMSO-AUT** I-Shift manual gear shifting available in automatic mode, including kick-down function
- **AVO-ENH** I-Shift with enhanced software for construction and off-road applications
- **APF-ENH** I-Shift with enhanced PTO functions (Auto neutral for p. brake/Reverse inhibit/Split box connection)
- **RET-TPT** Gearbox-mounted Powertronic primary retarder
- **TC-HWO** Cooler for hydraulic gearboxes - water/oil
- **TC-MAOH2** Extra high performance cooler for manual/I-shift gearboxes - air/oil
- **TC-MWOH2** High performance cooler for manual/I-Shift gearboxes - water/oil
- **2COM1100** Dual-cylinder air compressor 760 cc, 1100 l/min
- **2COMP870** Dual-cylinder, two-stage air compressor 560 cc, 870 l/min
- **2COMP900** Dual-cylinder air compressor 636 cc, 900 l/min
- **CLU-AIRC** Air compressor clutch with automatic declutching when not needed, to save fuel
- **AIRIN-HI** High air inlet
- **AIRIN-LO** Low air inlet
- **ACL1ST-S** Air cleaner with extra filter element
- **24A110BL** Alternator 110 Ampere
- **24A150BL** Alternator 150 Ampere
- **24AL110B** Alternator 110 Ampere
- **24AL150B** Alternator 150 Ampere
- **CCV-C** Closed crankcase ventilation
- **PRIM-EL** Electrical priming pump for removal of air in the fuel system
- **PRIM-MAN** Manual priming pump for removal of air in the fuel system
- **AF-R** Hot fuel recirculation heated fuel filter
- **EST-AID** Engine intake air heater

■ Standard Equipment

□ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FMX D11 66 Rigid Diesel Reaer Leaf FMX 66R 1L

☐ 220EBH15	Engine block heater, 220 V, 1.5 kW	☐ ESPC-RO	Electronic stability program functionality control, switch - On/Reduced/Off
☐ PTER-100	Rear engine, clutch-independent PTO, flange connection, DIN 100/ISO 7646	☐ HWSS-ACB	Adaptive cruise control with forward collision warning (stationary and moving objects) and emergency braking. Using both radar and camera to collect info.
☐ PTER-DIN	Rear engine, clutch-ind. PTO, splined shaft groove (fem), close-coupled pump DIN 5462/ISO7653	☒ HWSS-FCB	Collision Warning with Emergency Brake (forward)
☐ PTER1400	Rear engine, clutch-independent PTO, flange connection, SAE 1410/ISO 7647	☐ LSS-DW	Lane Keeping Support - lane departure warning
☐ HPE-F101	Engine-mounted hydraulic pump F1-101, fixed displacement, single flow	☒ LCS4	Side Collision Avoidance Support, side collision warning, both sides
☐ HPE-F41	Engine-mounted hydraulic pump F1-41, fixed displacement, single flow	☐ LCS5	Active Side Collision Avoidance Support: Collision Warning for both sides (sound and visual information) and Emergency Brake for passenger side
☐ HPE-F51	Engine-mounted hydraulic pump F1-51, fixed displacement, single flow	☒ DAS-W	Driver Alert Support
☐ HPE-F61	Engine-mounted hydraulic pump F1-61, fixed displacement, single flow	☐ RSENS-W	Wipers rain sensor
☐ HPE-F81	Engine-mounted hydraulic pump F1-81, fixed displacement, single flow	☒ CU-ECC	Automatic climate control with sun sensor
☐ HPE-T53	Engine-mounted hydraulic pump F2-53/53, fixed displacement, twin flow	☐ CU-ECC2	Automatic climate control with sun sensor, humidity sensor, air quality sensor and carbon filter
☐ HPE-T70	Engine-mounted hydraulic pump F2-70/35, fixed displacement, twin flow	☒ IGT-BUT	Push button ignition
☐ HPE-V45	Engine-mounted hydraulic pump VP1-45, variable displacement, single flow	☒ IMMOBIL	Immobiliser
☐ HPE-V75	Engine-mounted hydraulic pump VP1-75, variable displacement, single flow	☐ ALARM-E	Anti-theft alarm for cab, superstructure and trailer
☐ PTPT-D	Gearbox PTO, 1 front/upper connection DIN 5462/ISO 7653 for plug-in pump, 850 Nm	☐ PHONE-PK	
☐ PTPT-F	Gearbox PTO, 1 front/upper rear flange connection SAE 1410/ISO 7647 for propshaft, 850 Nm	☐ ISUNS-BS	Side interior roller blind on both sides, manually manoeuvred
☐ PTR-D	Gearbox low-speed PTO, 1 rear connection DIN 5462/ISO 7653 for plug-in pump, 1000 Nm	☒ ISUNS-DS	Side interior roller blind on driver's side, manually manoeuvred
☐ PTR-DH	Gearbox high-speed PTO, 1 rear connection DIN 5462/ISO 7653 for plug-in pump, 600 Nm	☐ ISUNF-B	Interior roller blind, integrated in front shelf, electrically manoeuvred
☐ PTR-DM	Gearbox medium-speed PTO, 1 rear connection DIN 5462/ISO 7653 for plug-in pump, 600 Nm	☐ ISUNF-MD	Interior roller blind, integrated in front shelf, manually manoeuvred
☐ PTR-F	Gearbox low-speed PTO, 1 rear flange connection SAE 1410/ISO 7647 for propshaft, 1000 Nm	☒ ISUNF-RE	
☐ PTRD-D	Gearbox high-speed PTO, 1 rear + 1 front DIN 5462/ISO 7653 for plug-in pumps, 870 Nm	☒ ISUNF-RM	
☐ PTRD-D1	Gearbox high-speed PTO, 1 rear SAE 1410/ISO 7647, 1 front DIN5462/ISO7653, 870 Nm	☐ ADFS	Two extra DIN slots in front shelf, 165x40x180 mm (W x H x D)
☐ PTRD-D2	Gearbox PTO, 2 rear hi/lo-speed SAE1310/1410/ISO7647, 1 front hi-speed DIN5462/ISO7653, 870/1000 Nm	☐ BUPALARM	Reversing warning
☐ HPG-F101	Gearbox-mounted hydraulic pump F1-101, fixed displacement, single flow	☐ RTOLL-PK	Preparation kit for electronic road fee (GPS/GSM antenna and cables)
☐ HPG-F41	Gearbox-mounted hydraulic pump F1-41, fixed displacement, single flow	☐ REMC-MF	Wireless remote control, multi-functional
☐ HPG-F51	Gearbox-mounted hydraulic pump F1-51, fixed displacement, single flow	☐ FIREXT2G	Fire extinguisher 2 kg, German decal
☐ HPG-F61	Gearbox-mounted hydraulic pump F1-61, fixed displacement, single flow	☐ FIREXT3S	Fire extinguisher 3 kg, Swedish/English decal
☐ HPG-F81	Gearbox-mounted hydraulic pump F1-81, fixed displacement, single flow	☐ WARNVEST	Reflective vest, fulfils European standard EN 471 class 2
Cab Interior, Driving		☒ WARNTRI2	Two warning triangles
☒ STWPOS-L	Left-hand drive	☐ AIDKIT	First aid kit containing sticking plaster, washing and drying pads, compresses, elastic bandages, respiratory mask, gloves and scissors.
☐ STWM-LE	Steering wheel material leather	☐ AIDKIT1B	First aid kit containing sticking plaster, compresses, elastic bandages, gloves, scissors, triangular bandage, bandaging cloths, adhesive tape and rescue sheet (German requirements)
☐ STGW-AD2	Manually adjustable steering wheel with neck tilt	☐ WARNLAMP	Portable amber and white warning lamp with batteries
☒ STGW-ADJ	Manually adjustable steering wheel	☐ LAMP-IN	Inspection lamp with 10 m cable
☐ AIRBAG	Airbag on driver's side	☐ BULBKIT	Bulb and fuse kit
☐ DRC-AMII	Regeneration control for DPF, initiation: automatic or manual, inhibition: manual	☐ WRITEPAD	Writing pad with paper clamp
☒ DRC-AUTO	Regeneration control for DPF, fully automatic (in motion)	Cab Interior, Living	
☒ 1DAYDIG4	Gen 4, one-day digital tachograph, EC approved	☒ DST-CF1	Driver's seat Comfort
☐ ARSL	Additional, temporary road speed limiter control (switch in dashboard)	☐ DST-CF4	Driver's seat Comfort, belt in seat
☐ ESP-BAS1	ESP for tractor combinations with ABS/EBS or rigid vehicles/combinations with std center of gravity	☐ DST-CF5	Driver's seat Comfort, belt in seat, heated, adjustable lumbar&side support, extendable seat cushion
		☐ DST-CF6	Driver's seat Comfort, belt in seat, heated, ventilated
		☐ SBD-RED	Red safety belts, passenger and driver seats
		☐ SBPRE-DS	Driver's seat belt pretensioner
		☐ PST-BAS1	Passenger seat Basic, non-suspended
		☐ PST-CF4	Passenger seat Comfort, suspended, belt in seat

■ Standard Equipment

□ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

□ PST-CF5 Passenger seat Comfort, suspended, belt in seat, electrically heated ■ PST-STD2 Passenger seat Regular, non-suspended □ PST-STD4 Passenger seat Regular, suspended □ SBPRE-PS Passenger seat belt pretensioner □ ARMRE-BB Two armrests on both driver's and passenger seats □ ARMRE-DB Two armrests on driver's seat □ ARMRE-PB Two armrests on passenger seat □ ARU-BAS Vinyl armrest upholstery □ ARU-LEA Leather armrest upholstery ■ FMAT-RUB Black rubber floor mats □ FMAT-TX2 Two textile (dark grey on FH/FM/FMX, black on FH16) and two black rubber floor mats □ LBK70 Lower fixed bed 2000x700 mm, non-foldable, safety net included □ MATL-FI Mattress lower bed firm, pocket springs, recommended for body weight over 100 kg □ MATL-SF Mattress lower bed semi-firm, pocket springs, recommended for body weight up to 100 kg □ OLMAT-BA Overlay mattress, 28 mm thick black textile □ OLMAT-PR Overlay mattress Premium, 35 mm thick black textile □ TBK60F Fixed top bed 600x1900 mm, foldable up to 52° (depending on cab & upper storage), net included □ TBK70F Fixed top bed 700x1900 mm, foldable up to 52° (depending on cab & upper storage), net included □ PH-CAB2 Cab parking heater, 2 kW □ PH-ENGCA Engine and cab parking heater □ PH-SS Short stop cab heater □ SLCP-BAS Basic sleeper control panel (interior light, parking heater, roof hatch, door locks) □ ETSB-F Storage at front of engine tunnel □ ETSB-FR Storage at back of engine tunnel and at back, against rear cab wall □ ETSB-FRS Storage at front of engine tunnel and immersed in RH side of tunnel □ ETSB-FS Storage at back of engine tunnel, at back against rear cab wall and immersed in RH side of tunnel □ ETSB-R Storage at back of engine tunnel, against rear cab wall □ ETSB-RS Storage immersed in RH side of engine tunnel and at back against rear cab wall □ ETSB-S Storage immersed in RH side of engine tunnel □ RUS-BAS Storage in rear upper cab, 154 litres (300 mm high) □ RUS-HIG Storage in rear upper cab, 245 litres (440 mm high) □ REF-ICPK Preparation kit for refrigerator □ MICRO-PK Preparation kit for microwave oven (electrical cables to front shelf) □ BOTH-D One bottle holder under dashboard centre section □ COFMA-PK Preparation kit (24 V) for coffee maker ■ INLI-BAS Interior white light with smooth light transition at on/off, no dimming □ INLI-NL Interior white and red (night) light with smooth light transition at on/off □ INLI-NLD Interior white and red (night) light with smooth light transition at on/off and dimmer □ ARL-FLEX Two (driver and passenger side) LED reading lamps with flexible arms, mounted on sidewalls ■ RH-EE Roof skylight/emergency exit, tinted glass (not a hatch) □ RH-ER Roof hatch, electrically operated, steel, with emergency exit handle □ RH-ETR Roof hatch, electrically operated, tinted glass, rear opening 50 mm □ RH-MTR Roof hatch, manually operated, tinted glass, rear opening 50 mm ■ GLAS-TIN Tinted windows	□ SWIND-BS Rear side window on both sides □ SWIND-PS Rear side window on passenger side □ AWIND-RF Fixed window in back of cab (without curtains) □ VANMIR Vanity mirror in front shelf lid □ AS-FUS One extra shelf in each of the two front upper storage compartments □ INFOT-PK Preparation kit (bracket, security straps, and antenna cable) for mounting of TV above driver door Cab exterior ■ EXTL-BAS Exterior trim level basic ■ DGLAS-H Tempered door window glass □ DGLAS-L Laminated window glass in doors. The glass can crack, but retains its protective effect. It also provides better sound insulation. ■ BUMP-HD Heavy-duty front bumper □ AUXFS Extra footstep in cab side □ GUARD-EH Guard plate for cooling pipes and oil sump □ SIDEH-B Guide rail on day cab, driver's side □ SIDSTP-R Side ladder and guide rail on day cab, driver's side ■ BUGNET Insect screen (PVC-coated fibreglass) in front of radiator □ CTILT-P-E Electric cab tilt pump ■ CTILT-P-M Manual cab tilt pump □ FCABS-A Air front cab suspension ■ FCABS-M Mechanical front cab suspension □ RCABS-A Air rear cab suspension ■ RCABS-M Mechanical rear cab suspension □ MIRCFCPX Rear-view and wide-angle mirrors (both sides), passenger corner camera (FMX) □ MIRCMCP Camera Monitor System and passenger corner camera □ MIRCMS Camera Monitor System ■ MIRCOMFX Robust rear-view and wide-angle mirrors (both sides), kerb observation mirror ■ AMIR-F20 Front close-view mirror above windscreen, passenger side (radius 200 mm) □ SUNV-H Exterior front sun visor, transparent dark-grey □ AD-ROOF Roof air deflector □ AD-SIDES Cab side air deflectors, short ■ HL-LED LED headlamps □ HBDA-A Automatic main beam deactivation and reactivation ■ HL-CLEAN High-pressure headlamp cleaner □ HLP-ST Steel headlamp protectors (steel and plastic for FMX) ■ DRL-LED Daytime running lamps (LED) □ ASL-RF2 Two LED spot lamps in sign box □ BEACOA2F Two amber LED beacons on cab front roof □ BEACOA2R Two amber LED beacons on cab rear roof □ BEACON-P Preparation kit for roof beacons □ BEACONA4 Four amber LED beacons on roof - two on front, two on rear □ CABPT-R1 One front cab roof pass-through on passenger side ■ CABPT-R2 Two front cab roof pass-throughs, one on each side □ SPOT-P-F Preparation kit for spot lamp in cab front, max 280 W □ SPOT-P-R Preparation kit for spot lamp in cab roof, max 280 W □ SPOT-P-RF Preparation kit for spot lamp in cab roof and front, max 280 W □ ROS-IL Roof sign illumination □ ROS-IL2 Preparation kit for installation of roof sign illumination □ ROS-ILP Wiring kit for roof sign illumination □ CSGN-FMX FMX decal in the roof sign box
--	--

MODEL RANGE

FMX D11 66 Rigid Diesel Reaer Leaf FMX 66R 1L

- **HORN-F1S** Single-tone Jericho horn behind grille, operated by steering wheel buttons
- **HORN-R2S** Two chromed single-tone air horns on the roof, operated by steering wheel buttons
- **ANT-CBR** Preparation kit for communication/CB radio: roof-mounted single antenna and wiring
- **ACCB-AP** Accessory brackets mounted on front roof, midroof and rear roof
- **ACCB-R-F** Accessory bracket mounted on front roof
- **ACCB-R-FM** Accessory brackets mounted on front roof and midroof
- **ACCB-R-FR** Accessory brackets mounted on front and rear roof
- **ACCB-R-M** Accessory bracket mounted on midroof
- **ACCB-R-R** Accessory brackets mounted on mid-roof and rear roof
- **ACCB-R-RM** Accessory bracket mounted on rear roof
- **REFS-TW** Reflecting white cab side stripes by-packed in cab
- **REFS-TY** Reflecting yellow cab side stripes by-packed in cab

Superstructure preparations

- **SRWL-PK** Preparation kit for LED reverse/work lamps at rear chassis, 3-pos switch (On/Off/Reverse auto On)
- **SWL-2FW** 2 white LED work lamps at front of chassis, and a 2-position switch (On/Off)
- **SWL-2RW** 2 white LED work lamps, rearward-facing on rear chassis (LH/RH side)
- **SWL-4W** 4 white LED work lamps on chassis (2 front, 2 rear) and a flexible switch (On/Off)
- **SWL-PK** Preparation kit for LED work lamps on chassis, with a 2-pos switch (On/Off)
- **WL-CHPK** Preparation kit for work lamp (switch with cable to frame, by gearbox)
- **WLC-H2A**
- **WLC-H2W** 2 white LED work lamps, high-mounted on back of cab (switch included)
- **WLC-PKCH** Preparation kit (cables and switch) for work lamp inside or outside superstructure
- **WLC-PKH** Preparation kit (cables and switch) for high-mounted work lamps on back of cab
- **WLC-PKL** Preparation kit (cables and switch) for low-mounted work lamps on back of cab
- **WLC-PKLH** Preparation kit (cables and switch) for low- and high-mounted work lamps on back of cab
- **ECBB-BAS** Body builder electrical centre, prepared for body builder module
- **ECBB-HIG** Body builder electrical centre, body builder module with 14 high and 4 low digital outlets
- **ECBB-MED** Body builder electrical centre, body builder module with 7 high and 4 low digital outlets
- **BBCHAS1** One 7-pole bodywork connector on chassis
- **BBCHAS3** Three 7-pole bodywork connectors on chassis
- **BEPR-T2** Bodywork electrical and software preparation for tipper with remote control
- **TD-LED** Trailer detection with LED sensor
- **FRFS-BS** Frame rail free space on both sides to give space for crane legs or other equipment
- **FBA-BTF** Front body attachment brackets, lower, for flexible body
- **FBA-BTSF** Front body attachment brackets, lower, for semi-flexible body
- **HBA-FSFB** Holes for body attachments, flexible/semi-flexible body
- **HBA-SB** Holes for body attachments, stiff body
- **RBA-T2** Rear body attachment brackets, lower
- **AUXL-SPK** Preparation kit (wiring and a switch in dashboard) for snow plough lamps
- **TAILPRE2** Tail lift preparation kit, wireless remote operation
- **TAILPREP** Tail lift preparation kit
- **AESW2** 2 bistable bodywork switches (marked AUX1/AUX2)
- **AESW2PK** 2 bistable bodywork switches (marked AUX1/AUX2) + prepared for 4 bistable switches (dummy switches)

- **AUXSW-4** Hardwiring for 4 extra switches (from body builder electrical centre to instrument panel)

Services

- **TGW-4GWL** Telematics gateway with 4G modem and WLAN
- **FMS-PK** Fleet management system gateway, preparation kit
- **DRUT1** My Truck service/app (remote vehicle status, alerts and control), 1-year prepaid subscription
- **DRUT2** My Truck service/app (remote vehicle status, alerts and control), 2-year prepaid subscription
- **DRUT3** My Truck service/app (remote vehicle status, alerts and control), 3-year prepaid subscription
- **DRUT4** My Truck service/app (remote vehicle status, alerts and control), 4-year prepaid subscription
- **DRUT5** My Truck service/app (remote vehicle status, alerts and control), 5-year prepaid subscription
- **TSRS** Road sign recognition

■ Standard Equipment □ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FMX D11 66 Rigid Diesel Reaer Leaf FMX 66R 1L

Volvo Trucks. Driving Progress