


MODEL RANGE

FMX 84 Rigid Tag Tridem Electric FMX 84R TE

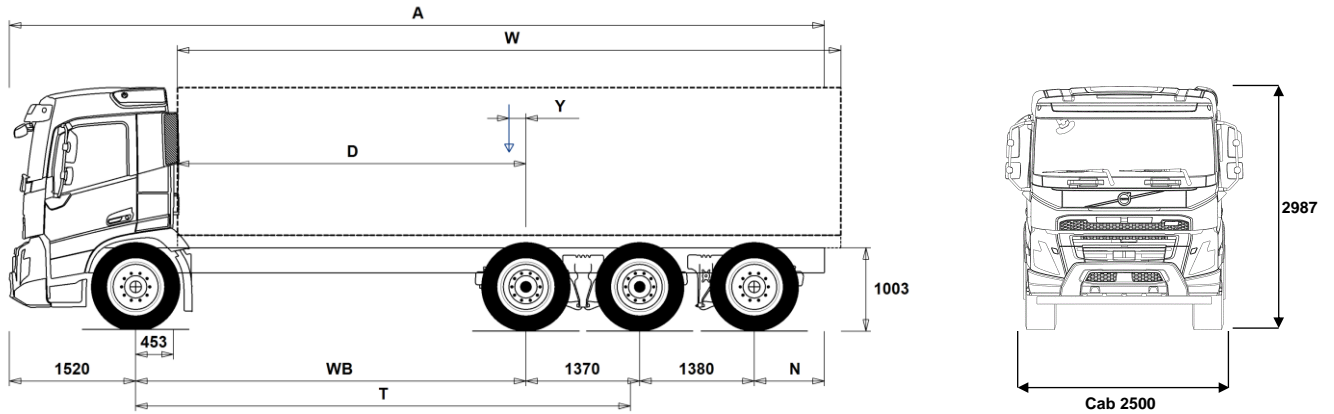

Chassis Dimensions [mm]

WB Wheelbase	3900	4100	4300	4600	4900	5200
A Overall Chassis Length	10815	10565	10765	10965	11215	11515
D Center of rear axle to front of body	3397	3597	3797	4097	4397	4697
N Rear Overhang (Min.)	845	845	845	845	845	845
N Rear Overhang (Max.)	2645	2195	2195	2095	2045	2045
T Theoretical Wheelbase	5159	5359	5559	5859	6159	6459
Y Center of Gravity for Payload (Min.)	-711	-712	-709	-708	-704	-701
Y Center of Gravity for Payload (Max.)	-711	-712	-709	-708	-704	-701
W Body Length (Min.)	8214	8559	8738	9004	9268	9529
W Body Length (Max.)	8214	8559	8738	9004	9268	9529

Chassis Weights [kg]

Front Axle	5515	5615	5690	5805	5900	5990
Rear Bogie	6130	6015	5955	5875	5800	5740
Kerb Weight	11645	11630	11645	11680	11700	11730
Payload (including body, driver, fuel, etc.)	23355	23370	23355	23320	23300	23270

Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	16100	16700	17300	18200	19100	20000
Turning Circle Diameter Wall to Wall	17600	18200	18800	19700	20600	21500

Plated Weights [kg]

	Design
Gross Vehicle Weight	35000
Gross Combination Weight	32000
Front Axle	8000
Rear Bogie	27000

Important Notes

Chassis Dimensions

Cab Height: +374 mm for CAB-HSLP, -204 mm for CAB-LDAY, -204 mm for CAB-LSLP, +4 mm for CAB-SLP.

Front Axle to Back of Cab: +422 mm for CAB-HSLP and CAB-LSLP and CAB-SLP.

D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.

Height can vary ± 20 mm for leaf and ± 10 mm for air suspension.

All dimensions are for unladen chassis and any tag axles down. Chassis height used: CHH-MED.

Height change when chassis height CHH-HIGH: 0 mm.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres:	315/80R22.5
Drive Axle Tyres:	315/80R22.5
Trailing/Pusher Axle Tyres:	315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary ± 10%.

Turning diameters are theoretically calculated. Tag axle used: TA-HYDRS.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FMX84RTE.

MODEL RANGE

FMX 84 Rigid Tag Tridem Electric FMX 84R TE

Transport operation

- **RC-SMOOT** Smooth road conditions.
At least 95% of the driven distance on well maintained or less maintained surfaced roads.
Driving occurs on:
- Badly maintained surfaced roads.
- Hard packed sand or gravel surface of good or bad quality.
- **GARB-PRE** Garbage preparation
- **TIPP-PRE** Tipper vehicle preparation
- **UNIFORM** Basic platform vehicle

Core components

- **CHH-HIGH** Chassis height high - approx. 1000 mm above ground level
- **CHH-MED** Chassis height medium - approx. 900 mm above ground level
- **TA-HYSB2** El. hydraulically steered tag axle with single wheels (two wheels on complete axle) and steering lock out at 38 km/h
- **RADDT-GR** Rear air suspension, 3 axles - 2 driven / 1 tag
- **FMXE-DAY** FMX Electric day cab
- **FMXE-HSL** FMX Electric high sleeper cab
- **FMXE-LDA** FMX Electric low day cab
- **FMXE-LSL** FMX Electric low sleeper cab
- **FMXE-SLP** FMX Electric sleeper cab
- **EPT2412** Electric propulsion transmission 2400nm 12 speed
- **NEM2** 2 electrical motors
- **NEM3** 3 electrical motors
- **RTS2370A** Rear single reduction tandem axles - bogie load 23 tonnes, GCW 70 tonnes

Packages

- **INFONDF** Information package with Navigation support and prepared for Dynafleet vehicle onboard support
- **DRIV-E** Drive package
- **DRIV-E+** Drive Plus package
- **DRIV-E++** Drive Plus Plus package
- **1LIVFM-E** Living package, one person
- **2LIVFM-E** Living package, two persons
- **GSR2024** General safety regulations 2024
- **GSR2024+** General safety regulations 2024 plus
- **SAFE-E** Safety package
- **SAFE-E+** Safety package +
- **RANGOPT3** Range Optimization Package, three years prepaid subscription
- **RANGOPT4** Range Optimization Package, four years prepaid subscription
- **RANGOPT5** Range Optimization Package, five years prepaid subscription

Chassis

- **FST-AIR** Front air suspension
- **FSLB-BAS** Front air suspension basic levelling stroke
- **FSLB-HI** Front air suspension high levelling stroke
- **FAL10.0** Front axle load 10.0 tonnes
- **FAL8.0** Front axle load 8.0 tonnes
- **FAL8.5** Front axle load 8.5 tonnes
- **FAL9.0** Front axle load 9.0 tonnes
- **FSTAB** Front stabilizer with normal stiffness
- **FSTAB2** Front stabilizer with medium high stiffness
- **FSTAB3** Front stiff stabilizer
- **RAL27** Rear axles load 27 tonnes
- **RAL33** Rear axles load 33 tonnes
- **RALIM105** First rear drive axle load limiter, 10.5 tonnes (speed controlled)
- **RALIM115** First rear drive axle load limiter, 11.5 tonnes (speed controlled)
- **RALIM13** First rear drive axle load limiter, 13 tonnes
- **RALIM95** First rear drive axle load limiter, 9.5 tonnes
- **ASF-DL1** Air suspension with 1 driving level
- **ASF-DL3** Air suspension with 3 driving levels

- **ACTST-TO** Volvo Dynamic Steering (VDS) with extra pump and torque overlay
- **ASFE-BAS** Volvo Dynamic Steering feature basic
- **ASFE-OG** Volvo Dynamic Steering stability assist
- **ASFE-PO** Volvo Dynamic Steering personal settings, stability assist
- **ASFE-PS** Volvo Dynamic Steering personal settings
- **AUXPARK** Two extra parking brake chambers
- **RST-AIR** Rear air suspension
- **FRAME300** Frame rail section external height 300 mm
- **FST8080** Frame section thickness - web 8.0 mm / flange 8.0 mm
- **FIL-EEEB** Frame inner liner from end of engine end to end of bogie
- **FIL-EEEE** Frame inner liner from end of engine end to end of frame
- **FIL-FBEB** Frame inner liner from front of bogie to end of bogie
- **FIL-FBEF** Frame inner liner from front of bogie to end of frame
- **FIL-TXEB** Frame inner liner from transmission cross member to end of bogie
- **FIL-TXEF** Frame inner liner from transmission cross member to end of frame
- **BATTAMP** Battery ampere
- **BATTIND** Battery charge indication
- **WHC-FIX2** Two fixed wheel chocks
- **WHC-FOL2** 2 foldable wheel chocks
- **WHCP-M** Wheel chock(s) in the middle part of the vehicle
- TRACTOR, BBOX-L, Fix, 1/2 w chocks = Left frame front of rear wheels
- RIGID, 1 front axle, Fix, 1/2 w chocks = Left frame front of (or behind) rear wheels
- **WHCP-R** Wheel chock(s) in the rear part of the vehicle
- RIGID, 1 front axle, Fix, 1/2 w chocks = Left frame rear (or front) of rear wheels
- **WHCP-T** Transport mounted wheel chock(s) in cab outer luggage compartment
- **SUP-BAS** Standard aluminium bars for side underrun protection
- **CHAIN-S** Snow chains
- **HOOK-SC** The galvanised steel hooks are a practical solution developed to store the snow chains. For Rigid's there are two hooks attached in pre-punched holes on each side of the frame rail side of the rear frame overhang. On Tractors, two hooks are mounted in an existing hole pattern on the end of the rear frame overhang and a protection shield prevents the air tank from being damaged by the snow chains. The hooks will protrude approximately 200 mm behind the chassis frame end.
The weight increase for the four hooks on Rigid's is approximately 3.5 kg and for Tractors with protection shield it is approximately 3 kg
- **TOWF-HD1** One heavy duty front towing device
- **TOWMBRH** High mounted towing member, in centre of frame
- **TOWMBRL1** Towing member, low mounted under the frame (position 1)
- **TOWMBRM** Towing member, medium mounted in line with frame lower flange
- **RFEC-S** Standard rear frame end cut for rigid vehicles.
- **RFEC-U** Rear frame end cut for rigid vehicles where a short overhang and an upper frame end cut out for the body is required, for example:
Refuse rear loader
Tipper
Hooklift
- **C-RI4040** Towing coupling Ringfeder RF4040A G-150
- **C-RI4045** Towing coupling Ringfeder RF4045A G-150
- **C-RI5050**
- **C-RO400G** Towing coupling Rockinger 400 G-150
- **C-RO50** Towing coupling Rockinger 50 mm
- **C-VBG520** Towing coupling VBG 5200D
- **C-VBG795** Towing coupling VBG 795V
- **TOWR-ONE** It is possible to use the frame end cross member as a

■ Standard Equipment □ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FMX 84 Rigid Tag Tridem Electric FMX 84R TE

<p>towing cross member. This is restricted to infrequently used vehicles for short distance "on site" transport where a towing device is required. The towing cross member also has to be reinforced. This is achieved using a U-profile. TOWR-ONE features a reinforced end member and a lockable towing pin. It is dimensioned for an 8 tons single axle trailer or a 30 tons double axle trailer.</p> <p>□ TREL-PK Trailer electrical preparation kit (chassis/cab wiring)</p> <p>□ TREL15 15 pol electrical trailer connector (ADR certified)</p> <p>□ TREL7-7 2x7 pol (24N+24S) electrical trailer connectors (UADR)</p> <p>□ TBC-DUO Trailer brake connection, Duomatic</p> <p>□ TBC-EC Trailer brake connection, European Community</p> <p>□ TRBR-STA Stationary trailer brake control</p> <p>□ TRB-STRE Automatic low speed trailer brake activation (stretch brake) to avoid jack-knifing and to improve steerability</p> <p>□ RFEND-B The fenders have a robust three-piece design with a top part that can easily be removed (no tools required) facilitating access for body building and service. The fenders are manufactured from black plastic and received in different performance to suit chassis height and tyre dimension. The fender design fulfils the technical requirements of current EU directive.</p> <p>□ RFEND-T The rear fenders are temporary fixed on the frame of Rigid trucks for transport on own wheels from factory to body builder. This is done in order to fulfill legal safety requirements. There are two different sizes of fenders, one for single tyres and one for twin tyres.</p> <p>□ RFH-BAS Optimal fender installation (rear and 2nd front axle) with regard to legal demands, wheel/tyre sizes, chassis height and fifth wheel height.</p> <p>□ RFH-HIG Highest fender installation (rear and 2nd front axle). Suitable for rough and very rough road conditions.</p> <p>□ RFH-LOW Lower fender installation (rear and 2nd front axle). Suitable only for smooth road conditions. Increased risk of fender top wear.</p> <p>□ AUXATNK With an auxiliary air tank the truck will have extra capacity for the air suspension system. This is especially useful when the driver frequently uses the levelling system with the engine turned off (i.e. when the compressor is not operating). The levelling system's reaction time also improves with this extra tank. The position of the tank varies depending on the position of the spare wheel carrier: – Above the spare wheel when the spare wheel carrier is fitted ahead of the axle on the left side (SWCP-LF). – Under the frame on the left side for all other positions of the spare wheel carrier. The auxiliary air tank is available for 6x2/6x4/8x4 with rear air suspension</p> <p>■ BLIGHT-E Flashing brake lights will automatically activate in emergency braking. The flashing frequency is 4 Hz and emergency braking is detected if speed exceeds 50km/h and retardation is 4 m/s² or more. The function deactivates when retardation is less than 2.5 m/s²</p> <p>□ FRACLOS Frame end closing</p>	<p>□ RT-ALDPP Dura-Bright polished aluminium rims with countersunk holes (short stud fixing) on all axles</p> <p>□ RT-ALDU Brushed aluminium rims with countersunk holes (short stud fixing) on all axles</p> <p>□ SPWT-D Spare wheel with tyre equal to drive</p> <p>□ SPWT-F Spare wheel with tyre equal to front wheel</p> <p>□ SWCP-R Rear mounted spare wheel carrier behind axle on the right hand side of the chassis. It is preferred for longer wheelbases, WB4300 and longer. Due to the spare wheel carrier's location on the rear overhang, all chassis space between front and rear axles can be used for fuel tanks, toolboxes etc.</p> <p>□ SWCP-T Plastic strips strapped to the chassis are used as a temporary spare wheel carrier. Note that the mounting only is temporary and used during transportation.</p> <p>□ SWCP-TP Plastic strips strapped to the chassis are used as a temporary spare wheel carrier. Note that the mounting only is temporary and used during transportation. An ordinary spare wheel carrier is also included. This carrier is transport mounted on top of the temporarily chassis frame strapped spare wheel.</p> <p>□ JACK-12T Jack 12 tonnes The hydraulic jack has a capacity of 12 tonnes and its low manual pumping force facilitates use in uncomfortable positions. It has a release valve, which permits safe, easy and precise control over rate of lowering and a filter in the oil reservoir gives protection from contamination. The jack has a minimum height of 180 mm and a maximum height of 315 mm. Weight: 7.3 kg</p> <p>□ JACK-15T The hydraulic jack has a capacity of 15 tonnes and its low manual pumping force facilitates use in uncomfortable positions. It has a release valve, which permits safe, easy and precise control over rate of lowering and a filter in the oil reservoir gives protection from contamination. The jack has a minimum height of 225 mm and a maximum height of 435 mm. Weight: 10.8 kg</p> <p>□ JACK-20T The hydraulic jack has a capacity of 20 tonnes and its low manual pumping force facilitates use in uncomfortable positions. It has a release valve, which permits safe, easy and precise control over rate of lowering and a filter in the oil reservoir gives protection from contamination. The jack has a minimum height of 190 mm and a maximum height of 325 mm. Weight: 11.5 kg</p> <p>■ TOOL-BAS This kit consists of a tool bag (case) including the following tools: • Combination screwdriver. – 1 screwdriver handle – 1 blade, Philips/flat blade – 1 blade, Torx T10/Torx T20 – 1 blade, Torx T25/Torx T27 – 1 blade, Torx T30/Torx T40 • Socket wrench.</p> <p>□ TOOLKIT This kit consists of a tool bag (case) including the following tools: • Combination screwdriver. – 1 screwdriver handle – 1 blade, Philips/flat blade – 1 blade, Torx T10/Torx T20 – 1 blade, Torx T25/Torx T27 – 1 blade, Torx T30/Torx T40 • Socket wrench. • Adjustable pliers. • Allen key. • Adjustable spanner. • Hammer.</p> <p>□ INFLAHOS The tyre inflation hose is a 18 meter long air hose made of high quality rubber and equipped with nozzles on both ends. It can be used for filling air into a tyre by connecting the hose to an air tank valve on the truck.</p>
---	---

■ Standard Equipment □ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FMX 84 Rigid Tag Tridem Electric FMX 84R TE

- The tyre inflation hose is stored in the cab compartment for clean and easy access, either in the external luggage compartment (sleeper cab) or behind the seat (day cab).
- GAUGE-TP** Tyre pressure gauge
- Powertrain equipment**
 - DRM-BE** Drive mode, balanced and economy
 - PVT-MAP** Map based topography information using a high resolution commercial topography map
 - EPTC270** Electric power-take off torque capacity 270 nm
 - HPM-F101** Hydraulic pump F1-101 for electrical motor, fixed displacement pump
 - HPM-F41** Hydraulic pump F1-41 for electrical motor, fixed displacement pump
 - HPM-F51** Hydraulic pump F1-51 for electrical motor, fixed displacement pump
 - HPM-F61** Hydraulic pump F1-61 for electrical motor, fixed displacement pump
 - HPM-F81** Hydraulic pump F1-81 for electrical motor, fixed displacement pump
 - HPM-T42** Hydraulic pump F2-42/42 for electrical motor, twin flow displacement pump
 - HPM-T53** Hydraulic pump F2-53/53 for electrical motor, twin flow displacement pump
 - HPM-T55** Hydraulic pump F2-55/28 for electrical motor, twin flow displacement pump
 - HPM-T70** Hydraulic pump F2-70/35 for electrical motor, twin flow displacement pump
 - HPM-V130** Hydraulic pump VP1-130 for electrical motor, variable displacement pump.
 - HPM-V45** Hydraulic pump VP1-45 for electrical motor, variable displacement pump.
 - HPM-V75** Hydraulic pump VP1-75 for electrical motor, variable displacement pump.
 - HPM-V95** Hydraulic pump VP1-95 for electrical motor, variable displacement pump.
 - PTR-D** Mechanical gearbox driven low speed power take-off, 1 rear connection (DIN 5462 / ISO 7653) for plug-in pump (max. 1000 Nm).
 - PTR-DH** Mechanical gearbox driven high speed power take-off, 1 rear connection (DIN 5462 / ISO 7653) for plug-in pump (max. 600 Nm).
 - PTR-DM** Mechanical gearbox driven medium speed power take-off, 1 rear connection (DIN 5462 / ISO 7653) for plug-in pump (max. 600 Nm).
 - PTR-F** Mechanical gearbox driven low speed power take-off, 1 rear flange connection (SAE 1410 / ISO 7647) for propeller shaft (max. 1000 Nm).
 - PTR-FH** Mechanical gearbox driven high speed power take-off, 1 rear flange connection (SAE 1310 / ISO 7647) for propeller shaft (max. 600 Nm).
 - PTR-FL** Mechanical gearbox driven low speed power take-off, 1 rear flange connection (SAE 1310 / ISO 7647) for propeller shaft (max. 600 Nm).
 - PTRD-D** Mechanical gearbox driven high speed power take-off, 1 rear and 1 front connections (DIN 5462 / ISO 7653) for plug-in pumps (max. 870 Nm).
 - PTRD-D1** Mechanical gearbox driven high speed power take-off, 1 rear flange connection (SAE 1410 / ISO 7647) for propeller shaft / 1 front connection (DIN 5462 / ISO 7653) for plug-in pump (max. 870 Nm).
 - PTRD-D2** Mechanical gearbox driven power take-off, 2 rear flange (high-speed) connections (SAE 1310/1410 / ISO 7647) for propeller shafts / 1 front (high speed) connection (DIN 5462 / ISO 7653) for plug-in pump (max. 870/1000 Nm).
 - PTRD-F** Mechanical gearbox driven high speed power take-off, 1 rear flange connection (SAE 1410 / ISO 7647) for propeller shaft (max. 870 Nm).
 - HPG-F101** Gearbox mounted hydraulic pump F1-101, fixed displacement, single flow
 - HPG-F41** Gearbox mounted hydraulic pump F1-41, fixed displacement, single flow
- HPG-F51** Gearbox mounted hydraulic pump F1-51, fixed displacement, single flow
- HPG-F61** Gearbox mounted hydraulic pump F1-61, fixed displacement, single flow
- HPG-F81** Gearbox mounted hydraulic pump F1-81, fixed displacement, single flow
- Cab Interior, Driving**
 - CRUIS-E** Cruise control I-Cruise with controls in the steering wheel, I-Roll incl. Adding PVT-MAP give I-See.
 - STWPOS-L** Left hand drive
 - STWM-LE** Leather steering wheel
 - STGW-AD2** Mechanically adjustable steering wheel with neck tilt
 - 1DAYB** One day analogue tachograph, basic
 - 1DAYDIG2** Gen 2 one day digital tachograph, EC approved
 - 1DAYDIG4** Gen 4 one day digital tachograph, EC approved
 - TAC-PK2** Preparation kit tachograph, TAS-PK, TAC-PK
 - ARSL** Additional road speed limiter (switch in dashboard)
The additional road speed limiter allows the driver to define a temporary speed limit for the truck. This is a useful feature when entering a low-speed area.
The driver activates the additional speed limiter by pressing a switch on the instrument panel and the current speed becomes the limit. The speed limiter is deactivated by pressing the switch and releasing the accelerator, lifting off to below 20% engagement.
 - ESP-BAS1** Electronic Stability Program package intended for RIGID single vehicles or vehicle combinations with standard centre of gravity height when laden and for TRACTOR vehicle combinations with a single trailer or multiple trailers with ABS/EBS.
 - ESPC-RO** ESP (Electronic Stability Program) functionality control - Reduced / Off
 - HWSS-AC** Adaptive cruise control with forward collision warning
 - HWSS-ACB** Adaptive cruise control with forward collision warning (stationary and moving objects) and emergency braking. Using both radar and camera to collect info.
 - HWSS-FCB** Forward collision warning (stationary and moving objects) with emergency braking
 - LSS-DW** Lane keeping support - lane departure warning system
 - LCS4** Side Collision Avoidance Support, passenger and driver side
 - DAS-W** Driver Alert Support (drowsy driver warning)
 - RSENS-W** Wiper rain sensor
 - CU-ECC** Fully electrically controlled air conditioning with sun sensor
 - CU-ECC2** Fully electrically controlled air conditioning with sun sensor, mist sensor, air quality sensor and carbon filter
 - IMMOBIL** Immobiliser
 - ALARM-E** Burglar alarm - cab/body/trailer
 - ISUNS-BS** Manually manoeuvred side interior sun visor (roller blind type) on both sides
 - ISUNS-DS** Manually manoeuvred side interior sun visor (roller blind type) on driver side
 - ISUNF-RE** Electrical textile interior sun visor (roller blind) integrated in front shelf
 - ISUNF-RM** Manual interior textile sun visor (roller-blind) integrated in front shelf
 - ADFS** Two extra DIN slots in front shelf (push/pull storage), 165x40x180 mm (WxHxD)
 - BUPALARM** Reversing warning unit (back-up alarm)
 - RTOLL-PK** Preparation kit for road toll collect (GPS/GSM antenna and cables)

Standard Equipment Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FMX 84 Rigid Tag Tridem Electric FMX 84R TE

<ul style="list-style-type: none"> ■ LOADIND Load indicator with dashboard display. Measures axle pressures, load weight and total weight of truck and one trailer. □ REMC-MF Wireless remote control - multi functional □ FIREXT2G The fire extinguisher is an important part of the safety equipment. It is extremely reliable, has a high capacity and withstands temperatures down to -30°C. The fire extinguisher manages to extinguish fires in electrical systems and brakes. It is located on the driver side*, beside the seat, which makes it easy to reach in case of an accident. The placement of the fire extinguisher may vary depending on the specification, but it is always easily reachable by the driver. ■ FIREXT3S The fire extinguisher is an important part of the safety equipment. It is extremely reliable, has a high capacity and withstands temperatures down to -30°C. The fire extinguisher manages to extinguish fires in electrical systems and brakes. It is located on the driver side*, beside the seat, which makes it easy to reach in case of an accident. The placement of the fire extinguisher may vary depending on the specification, but it is always easily reachable by the driver. □ WARNVEST Reflective warning vest. The reflective vest makes a person clearly visible during work near a vehicle when it is dark or during other occasions when it is difficult to observe a person. It is made of yellow fluorescent textile, 100 % polyester, and it features two 50 mm wide reflective strips at the front and back. The reflective material is resistant to fuel and oil and works well in both wet and dry weather. The vest is stored in a plastic bag and it is washable at 40°C. Fulfills European standard according to EN 471 class 2. ■ WARNTRI2 Two warning triangles □ AIDKIT The first-aid kit features a well thought-out assortment of emergency treatment products for both minor and severe injuries: <ul style="list-style-type: none"> • 1 first-aid instruction • 1 pair of scissors • 2 triangular bandage, unbleached cotton cloth • 2 pairs of protective gloves (large) • 3 gauze bandages 80×4000 mm • 2 gauze bandages 60×4000 mm • 1 bandaging cloth 600×800 mm • 2 bandaging cloths 400×600 mm • 6 gauze dressings 100×100 mm (3×2) • 1 adhesive bandage 60×100 mm • 1 adhesive tape 25×5000 mm • 1 first-aid packet 100×120 mm • 3 first-aid packets 80×100 mm • 1 rescue sheet 1600×2100 mm (gold/silver) □ AIDKIT1B First aid kit containing sticking plaster, compresses, elastic bandages, gloves, scissors, triangular bandage, bandaging cloths, adhesive tape and rescue sheet (German requirements) □ WARNLAMP Portable warning lamp with batteries □ LAMP-IN Inspection lamp with 10 m cable □ BULBKIT Bulb and fuse kit □ WRITEPAD Writing pad with spring-loaded paper clip 	<ul style="list-style-type: none"> □ SBD-RED Red safety belts, passenger and driver seats. Improves and increases the safety image for transport companies. □ PST-BAS1 Passenger seat, basic, non suspended □ PST-CF4 Passenger seat, comfort, suspended, belt in seat □ PST-CF5 Passenger seat, comfort, suspended, belt in seat, electrically heated ■ PST-STD2 Passenger seat, regular, non suspended □ PST-STD4 Passenger seat, regular, suspended □ SBPRE-PS Passenger seat belt pretensioner □ ARMRE-BB Two armrests on both driver and passenger seats □ ARMRE-DB Two armrests on driver seat □ ARMRE-PB Two armrests on passenger seat □ ARU-BAS Vinyl armrest upholstery □ ARU-LEA Leather armrest upholstery ■ FMAT-RUB Two black rubber floor mats □ FMAT-TX2 Two textile (dark grey on FH/FM, black on FH16) and two black rubber floor mats □ LBK70 Lower fixed bunk, not foldable - 2000x700 mm. Safety net included. □ MATL-FI Mattress lower bunk - firm for over approx. 100 kg, pocket springs. □ MATL-SF Mattress lower bunk - semi-firm up to approx 100 kg, pocket springs. □ OLMAT-BA Overlay mattress protector, 28 mm thick black textile □ OLMAT-PR Overlay mattress protector, 35 mm thick black textile □ TBK60F Fixed top bunk 600x1900 mm, foldable up to 52 degrees to rear wall (depending on cab version and upper storage). Safety net included. □ TBK70F Fixed top bunk 700x1900 mm, foldable up to 52 degrees to rear wall (depending on cab version and upper storage). Safety net included. □ SLCP-BAS Basic sleeper control panel (controlling interior light, parking heater, roof hatch and door lock) □ ETSB-F Storage on engine tunnel - on front top □ ETSB-FR Storage on engine tunnel - on front top and at rear cab wall □ ETSB-FRS Storage on engine tunnel - on front top & at rear cab wall & storage immersed into tunnel on RH side □ ETSB-FS Storage on engine tunnel - on front top and storage immersed into tunnel on right hand side □ ETSB-R Fixed engine tunnel storage box at rear cab wall □ ETSB-RS Storage on engine tunnel - at rear cab wall and storage immersed into tunnel on right hand side □ ETSB-S Storage on engine tunnel - immersed into tunnel on right hand side □ RUS-BAS Rear cab upper storage 154 litres (300 mm high) □ RUS-HIG Rear cab upper storage 245 litres (440 mm high) □ REF-ICPK The kit consists of a bracket that is mounted on the engine tunnel and a hook that is mounted on the refrigerator side in order to strap it down to the bracket. The kit comes with all necessary equipment for installation of both the bracket and the refrigerator. □ REFR-RUS 28 litre rear upper wall mounted refrigerator with deviders □ MICRO-PK The front shelf above the passenger seat is prepared from factory with prerouted electrical cables for installation of a 24 V microwave oven. Cables for power supply and ground connections are included. ■ BOTH-D One 1.5 litre plastic soft-drink bottle holder under dashboard centre section □ COFMA-PK Preparation kit (24V) for coffee maker ■ INLI-BAS Interior white light with smooth light transition at on/off, no dimming □ INLI-NL Interior white and red (night) light with smooth light transition at on/off □ INLI-NLD Interior white and red (night) light with smooth light transition at on/off and dimmer
---	---

■ Standard Equipment □ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FMX 84 Rigid Tag Tridem Electric FMX 84R TE

<input type="checkbox"/> ARL-FLEX	Two (driver and passenger side) reading lamps with flexible arms (snake lamps) and led lamps fitted on side walls	<input checked="" type="checkbox"/> CABPT-R2	Two front cab roof pass throughs, one on each side
<input checked="" type="checkbox"/> RH-EE	Without roof hatch, sky window / emergency exit (tinted glass)	<input type="checkbox"/> SPOTP-F	Spotlamp preparation in cab front, max 280W
<input type="checkbox"/> RH-ER	Roof hatch - Electrically operated / steel / emergency exit handle	<input type="checkbox"/> SPOTP-R	Spotlamp preparation on cab roof, max 280W
<input type="checkbox"/> RH-ETR	Roof hatch - Electrically operated / Tinted glass / Rear opening	<input type="checkbox"/> SPOTP-RF	Spotlamp preparation on cab roof and in cab front, max 2x280W
<input type="checkbox"/> RH-MTR	Roof hatch - Manually operated / Tinted glass / Rear opening	<input type="checkbox"/> ROS-IL	Illuminated roof sign with switch in radio shelf. Switch for turning on/off.
<input checked="" type="checkbox"/> GLAS-TIN	Tinted windows (front/side/rear)	<input type="checkbox"/> ROS-IL2	Preparation kit for installing an illuminated roof sign*. It includes a prerouted cable harness, a switch and LED-lamps. The switch is connected in the radio shelf middle section. Switch cap with icon, are enclosed in cab. Lamps in sign are mounted. The stripe in the Globetrotter window is selected via the cab sign variants
<input type="checkbox"/> AWIND-RF	Rear fixed window (without curtains)	<input type="checkbox"/> ROS-ILP	Wiring preparation kit (wires and switch) for cab sign or roof air deflector illumination
<input type="checkbox"/> SWIND-BS	Extra side window on both sides	<input type="checkbox"/> CSGN-FMX	FMX decal in the cab roof sign area
<input type="checkbox"/> SWIND-PS	Rear side window on passenger side	<input type="checkbox"/> HORN-F1S	One front mounted (behind grille) single tone air horn, Jericho. Operated by steering wheel buttons.
<input type="checkbox"/> VANMIR	Vanity mirror in front shelf lid. In sleeper cab on passenger side and in high/extra high cabs in middle section of the front shelf.	<input type="checkbox"/> HORN-R2S	Two roof mounted single tone chromed air horns. Operated by steering wheel buttons.
<input type="checkbox"/> AS-FUS	One extra shelf in each of the two front upper storage compartments. Only 1 shelf if microwave oven mounted in one of the two compartments.	<input type="checkbox"/> ANT-CBR	Right hand side roof mounted foldable antenna and cables for CB radio, single aerial.
<input type="checkbox"/> INFOT-PK	Preparation kit (bracket, security straps, power cable, antenna cable and aux cable) for mounting of a television above driver door.	<input type="checkbox"/> ACCB-R-AP	Front, middle & rear roof mounted accessory brackets
Cab Exterior		<input type="checkbox"/> ACCB-R-F	Front roof mounted accessory bracket
<input checked="" type="checkbox"/> EXTL-BAS	Exterior trim level basic with painted grill	<input type="checkbox"/> ACCB-R-FM	Front & middle roof mounted accessory brackets
<input type="checkbox"/> LOCK-REM	Central door locking with remote control	<input type="checkbox"/> ACCB-R-FR	Front & rear roof mounted accessory brackets
<input checked="" type="checkbox"/> BUMP-HD	Heavy duty front bumper	<input type="checkbox"/> ACCB-R-M	Middle roof mounted accessory bracket
<input type="checkbox"/> SIDEH-B	Guide rail on day cab driver side	<input type="checkbox"/> ACCB-R-R	Rear roof mounted accessory bracket
<input type="checkbox"/> SIDSTP-R	Side ladder and guide rail on on day cab driver side	<input type="checkbox"/> ACCB-R-RM	Rear & middle roof mounted accessory brackets
<input type="checkbox"/> CTILT-P-E	Electrical cab tilt pump	<input type="checkbox"/> REFS-TW	Reflecting white cab side stripes by-packed in cab
<input checked="" type="checkbox"/> CTILT-P-M	Manual cab tilt pump	<input type="checkbox"/> REFS-TY	Reflecting yellow cab side stripes by-packed in cab
<input type="checkbox"/> FCABS-A	Air front cab suspension	Superstructure preparations	
<input checked="" type="checkbox"/> FCABS-M	Mechanical cab suspension	<input type="checkbox"/> SRWL-2RW	Two H3 70W white rear chassis mounted (LH/RH side) working lamps and a 3-position switch (On/Off/Reverse auto on)
<input type="checkbox"/> RCABS-A	Air rear cab suspension	<input type="checkbox"/> SRWL-PK	Wiring preparation for chassis mounted working lamps and a 3-position switch (On/Off/Reverse auto on). Max load 280W.
<input checked="" type="checkbox"/> RCABS-M	Mechanical rear cab suspension	<input type="checkbox"/> SWL-2FW	Two H3 70W white front chassis mounted (LH/RH side) working lamps and a 2-position switch (On/Off)
<input checked="" type="checkbox"/> MIRFCPX	Electrically heated and operated rear view mirrors with a wide angle section on both sides and kerb	<input type="checkbox"/> SWL-2RW	Two H3 70W white rear chassis mounted (LH/RH side) working lamps and a 2-position switch (On/Off)
<input checked="" type="checkbox"/> AMIR-F20	Front close view mirror above windscreen, passenger side (radius 200 mm)	<input type="checkbox"/> SWL-4W	Four H3 70W white front (2) and rear (2) chassis mounted (LH/RH side) working lamps and a 2-position switch (On/Off)
<input type="checkbox"/> SUNV-H	Exterior transparent dark grey front sun visor	<input type="checkbox"/> SWL-PK	Wiring preparation for chassis mounted working lamps and a 2-position switch (On/Off). Max load 280W.
<input type="checkbox"/> AD-ROOF	Roof air deflector. Design (length, height etc.) automatically calculated and varies depending on vehicle total height (chassis height, cab type, tyres etc).	<input type="checkbox"/> WL-CHPK	Preparation kit (switch and cable) for working lamp, max 2x70 W. Connector on chassis at gearbox.
<input type="checkbox"/> AD-SIDES	Short cab side air deflectors	<input type="checkbox"/> WLC-H2A	Two H3/70W working lamps with amber coloured lens high mounted back of cab (switch incl).
<input type="checkbox"/> AD-CHASX	Chassis side skirts	<input type="checkbox"/> WLC-H2W	Two H3/70W working lamps, white lens high mounted back of cab (switch incl).
<input type="checkbox"/> ADCF-F	Additional flap on chassis fairings	<input type="checkbox"/> WLC-PKCH	Preparation kit (cables and switch) for cab mounted chassis working lamp. Max load 280W.
<input type="checkbox"/> HLP-ST	Steel headlamp protection	<input type="checkbox"/> WLC-PKH	Preparation kit (cables and switch) for high mounted working lamps back of cab (pass through in cab rear roof included). Max load 280W.
<input type="checkbox"/> HLP-ST2	Steel wire mesh headlamp protection	<input type="checkbox"/> WLC-PKL	Preparation kit (cables and switch) for low mounted working lamps back of cab (pass through in cab rear wall included). Max load 280W.
<input checked="" type="checkbox"/> DRL-LED	V-shaped ("V-light") day running light (LED). Turned on low beam gives a dimmed "V-light".	<input type="checkbox"/> WLC-PKLH	Preparation kit (cables and switch) for low and high mounted working lamps back of cab (pass throughs in rear wall and rear roof included). Max load 280W.
<input type="checkbox"/> UDRL	Without day running light (dimmed V-light)	<input type="checkbox"/> ECBB-BAS	Body builder electrical centre without any body builder module
<input type="checkbox"/> ASL-RF2	Two Hella H11 70W spot lamps in sign box (one on each side of the Globetrotter sign)	<input checked="" type="checkbox"/> ECBB-HIG	Body builder electrical centre with cab body builder module, 14 high and 4 low dig. outlet
<input type="checkbox"/> IDLAMP-A	Three middle front roof mounted amber identification lamps	<input type="checkbox"/> BBCHAS1	One 7-pole connector for Body builder interface.
<input type="checkbox"/> IDLAMP-W	Three middle front roof mounted white identification lamps		
<input type="checkbox"/> IDLMPSW	Switch in cab for identification lamps		
<input type="checkbox"/> BEACOA2F	Two LED warning lights on the cab front		
<input type="checkbox"/> BEACOA2R	Two LED warning lights on the cab rear		
<input type="checkbox"/> BEACON-P	Preparation kit		
<input type="checkbox"/> BEACONA4	Four LED warning lights on the cab front-rear		
<input type="checkbox"/> CABPT-R1	One front cab roof pass through on passenger side		

Standard Equipment

Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FMX 84 Rigid Tag Tridem Electric FMX 84R TE

- **BBCHAS3** Wiring harness routed from the bodybuilder electrical distribution box inside the cab to a connection point inside the right frame rail beside the gearbox.
Three 7-pole connectors for Body builder interface.
Wiring harness routed from the bodybuilder electrical distribution box inside the cab to a connection point inside the right frame rail beside the gearbox.
- **BEPR-T2** Body builder electrical software preparation for tipper with remote control
- **EXSTER** Support for external steering control via body builder module
- **TD-BAS** Trailer detection without LED sensor
- **TD-LED** Trailer detection with LED sensor
- **FBA-BTF** Lower front body attachments for torsionally flexible platform body
- **FBA-BTSF** Lower front body attachments for torsionally semi-flexible body (van or curtainsider)
- **HBA-FSFB** Holes for body attachments, flexible/semi-flexible body
- **HBA-SB** Holes for body attachments, stiff body
- **RBA-T2** Lower rear body attachments for helper frame
- **CRANEPK1** Crane plates mounted to frame, interface for crane capacity up to 10 ton meter
- **CRANEPK2** Crane plates mounted to frame, interface for crane capacity up to 20 ton meter
- **CRANEPK4** Crane plates mounted to frame, interface for crane capacity up to 40 ton meter
- **AUXL-SPK** Electrical preparation kit (wiring and a switch in dashboard) for snow plough lights.
Preparation for installation of additional headlights and additional turning indicators.
- **TAILPRE2** Tail lift preparation kit, wireless remote operation
- **TAILPREP** Tail lift preparation kit, wire remote operation
- **AESW2** Two Body builder bistable electrical switches (marked AUX1 / AUX2)
- **AESW2PK** Two Body builder bistable electrical switches (marked AUX1/AUX2) and in an empty 4-group preparation another four bistable switches with dummy switch caps
- **AUXSW-4** Wiring for 4 extra hardwired switches (from Body builder electrical centre to switch positions)

Services

- **FMS-PK** Fleet Management System gateway, preparation kit
- **DRUT1** My Truck connects the vehicle to the smartphone app, 1 year prepaid subscription
- **DRUT2** My Truck connects the vehicle to the smartphone app, 2 year prepaid subscription
- **DRUT3** My Truck connects the vehicle to the smartphone app, 3 year prepaid subscription
- **DRUT4** My Truck connects the vehicle to the smartphone app, 4 year prepaid subscription
- **DRUT5** My Truck connects the vehicle to the smartphone app, 5 year prepaid subscription