


# MODEL RANGE

NEW FH Battery Electric 4x2 Tractor - Full Air Suspension FH 42T E

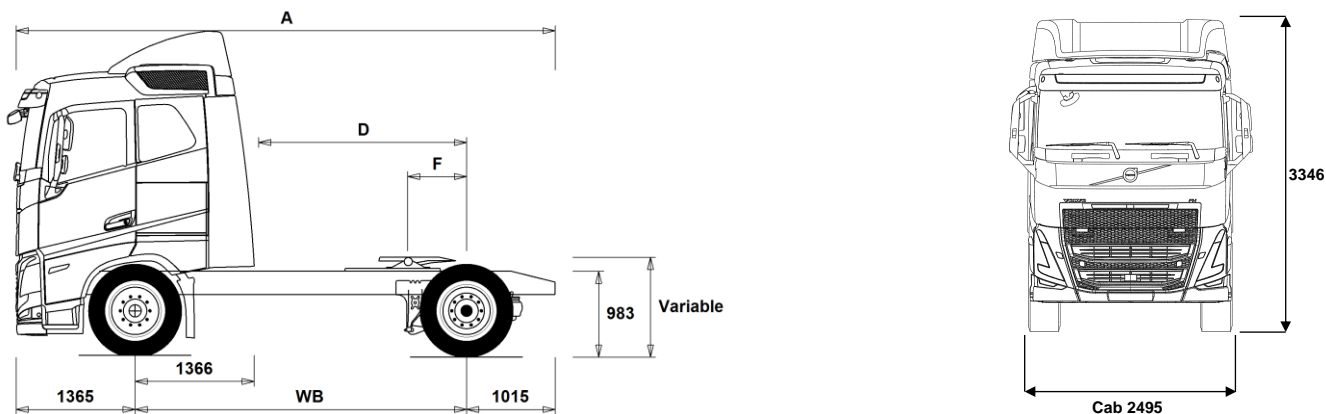

## Chassis Dimensions [mm]

<b>WB Wheelbase</b>	<b>3800</b>
A Overall Chassis Length	6180
D Center of rear axle to back of cab	2384
F Fifth Wheel Position (EC Directive 96/53)	675

## Chassis Weights [kg]

Front Axle	6215
Rear Axle	3520
Kerb Weight	9735

## Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	13700
Turning Circle Diameter Wall to Wall	15000

## Plated Weights [kg]

	<b>Plated</b>	<b>Design</b>
Gross Vehicle Weight	18000	20000
Gross Combination Weight	40000	44000
Front Axle	8000	8000
Rear Axle	11500	12000

## Important Notes

### Chassis Dimensions

Cab Height: -2413 mm for CAB-HSLP, -2413 mm for CAB-LSLP, -2413 mm for CAB-XHSL.

D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.

Height can vary ± 20 mm for leaf and ± 10 mm for air suspension.

All dimensions are for unladen chassis and any tag axles down. Chassis height used: CHH-MED.

Height change when chassis height CHH-HIGH: 0 mm.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres:	315/80R22.5
Drive Axle Tyres:	315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary ± 10%.

Turning diameters are theoretically calculated.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FH42TE.

# MODEL RANGE

## NEW FH Battery Electric 4x2 Tractor - Full Air Suspension FH 42T E

### TRUCK USE

- **DRM-BE** Balanced & Economy Drive Mode
- **PVT-MAP** I-See Predictive Cruise Control - using map based topography information
- **RC-SMOOT** Road Conditions - Smooth

### CORE COMPONENTS

- **CHH-HIGH** Chassis Height - High - for loading heights check the unique BEP chassis drawing attached to this quote
- **CHH-MED** Chassis Height - Medium - for loading heights check the unique BEP chassis drawing attached to this quote
- **RAD-G4** RAD-G4 - 4x2 Air - Lite
- **FHE-HSLP** Cab - Globetrotter - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-LSLP** Cab - Low sleeper - with steel safety cage design. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-SLP** Cab - Sleeper - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-XHSL** Cab - Globetrotter XL - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **EPT2412** Gearbox - I-shift Automated 12-speed - suitable for gross train weights up to 44tonne
- **NEM3** Number of Electrical Motors - 3 - Output 490 kW – 666hp continuous power

### PACKAGES

- **INFONDF** Media Information Platform with Navigation & Volvo Connect "On board" Support
- **DRIV-E** Cab Package - Drive
- **DRIV-E+** Cab Package - Drive +
- **DRIV-E++** Cab Package - Drive ++
- **1LIV-E** Sleep & Resting Package - Living one-bed
- **1LIV-E+** Sleep & Resting Package - Living one-bed +
- **1LIV-E++** Sleep & Resting Package - Living one-bed ++
- **2LIV-E** Sleep & Resting Package - Living two-bed
- **2LIV-E+** Sleep & Resting Package - Living two-bed +
- **2LIV-E++** Sleep & Resting Package - Living two-bed ++
- **SAFE-E** Active safety package
- **SAFE-E+** Active safety package +
- **RANGOPT3** Range Optimisation Package -3 years prepaid subscription
- **RANGOPT4** Range Optimisation Package - 4 years prepaid subscription
- **RANGOPT5** Range Optimisation Package - 5 years prepaid subscription

### CHASSIS

- **FSL5-BAS** Front suspension levelling - basic stroke
- **FAL10.0** Front axle design capacity - 10 tonne - check tyre capacity
- **FAL8.5** Front axle design capacity - 8.5 tonnes
- **FAL9.0** Front axle design capacity - 9.0 tonne - check tyre capacity
- **FSTAB** Front anti-roll bar - Normal stiffness
- **FSTAB2** Front anti-roll bar - Medium stiffness
- **FSTAB3** Front anti-roll bar - High stiffness
- **RAL12** Rear axle design capacity - 12 tonnes
- **ASF-DL1** Air suspension with 1 driving level
- **ASF-DL3** Air suspension with 3 driving levels
- **ASF-DLL** Air suspension with automatically lowered drive height over 60km/h
- **ACTST-TO** Active Steering- Volvo Dynamic Steering - VDS - with extra electronic pump and torque overlay

- **ASFE-BAS** Active steering feature - Basic - Volvo Dynamic Steering - VDS - only
- **ASFE-OG** Active steering feature - Volvo Dynamic Steering - VDS - with stability assist - oversteer
- **ASFE-PO** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings and stability assist
- **ASFE-PS** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings
- **FRAME266** Chassis frame section external height - 266 mm
- **FRAME300** Chassis frame section external height - 300 mm
- **FIL-EEEB** Chassis frame inner liner - From the end of the engine to the end of the bogie
- **BBOX-EF** Battery box position - End of the frame in rear overhang
- **BATTAMP** Battery management - Voltage and current gauge
- **BATTIND** Battery management - Voltage, current and charge indicators
- **WHC-FOL1** One foldable wheel chock
- **WHC-FOL2** Two foldable wheel chocks
- **WHCP-F** Wheel chock carrier position - In the front part of the vehicle
- **WHCP-T** Wheel chock carrier position - Outer luggage locker
- **CHAIN-S** Snow chains
- **HOOK-SC** Snow chain hooks
- **TOWF-NO1** Front towing device - One detachable - stored in cab
- **TOWF-NO2** Front towing device - Two detachable - stored in cab
- **TOWR-ONE** Towing hitch attached to rear crossmember
- **TREL15** Trailer electrical connection - Single 15 pin - ADR certified
- **TREL7-7** Trailer electrical connection - 2 x 7 pin - 24N and 24S
- **TBC-DUO** Duomatic type air line connectors
- **TBC-EC** Trailer brakes with EC palm coupling connectors
- **TBC-GBR** 'C' and 'CA' type air line connectors
- **TRBR-HCF** Full pressure hand controlled trailer brake
- **TRBR-STA** Stationary trailer brake control
- **TRB-STRE** Stretch Brake - Automatic low speed trailer brake activation to avoid jack-knifing and improve steerability
- **RFEND-B** Three piece EC approved rear mud wings and spray flaps
- **RFH-BAS** Basic rear wing height
- **RFH-HIG** High rear wing height - higher wing tops
- **RFH-LOW** Lower rear wing height - shallower wing tops
- **BLIGHT-E** Emergency brake light

### WHEELS & TYRES

- **RT-AL** Wheels - Alcoa brushed aluminium rims - standard holes for long stud fixing
- **RT-ALDP** Wheels - Alcoa Dura-Bright aluminium rims - standard holes for long stud fixing
- **RT-ALDPD** Wheels - Alcoa Dura-Bright EVO aluminium rims - countersunk holes for short stud fixing
- **RT-ALDU** Wheels - Alcoa brushed aluminium rims - countersunk holes for short stud fixing
- **SPWT-D** Spare wheel & tyre with rear tyre pattern
- **SPWT-F** Spare wheel & tyre with front tyre pattern
- **SWCP-T** Spare wheel supplied temporarily strapped to chassis
- **SWCP-TP** Temporary spare wheel carrier on top of chassis frame
- **JACK-12T** 12 tonne bottle jack
- **JACK-15T**
- **JACK-20T**
- **TOOL-BAS** Basic Toolkit
- **TOOLKIT** Complete tool kit
- **INFLAHOS** Tyre inflation hose
- **GAUGE-TP** Tyre pressure gauge

### DRIVELINE EQUIPMENT

- Standard Equipment
- Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

# MODEL RANGE

## NEW FH Battery Electric 4x2 Tractor - Full Air Suspension FH 42T E

<input checked="" type="checkbox"/> <b>CRUIS-E</b>	Eco cruise control (with eco-roll and I-cruise, controls in steering wheel)	<input type="checkbox"/> <b>ADFS</b>	Two extra DIN slots in front shelf - can be fitted with card or drawer available as an accessory
<input type="checkbox"/> <b>PTR-D</b>	Gearbox PTO for plug-in pump, 0.71xeng speed	<input checked="" type="checkbox"/> <b>BUPALARM</b>	Reverse alarm
<input type="checkbox"/> <b>PTR-DH</b>	Gearbox driven high speed PTO for one plug-in hydraulic pump	<input type="checkbox"/> <b>RTOLL-PK</b>	Road toll PREPARATION kit for trucks operating with "Toll Collect" in Germany
<input type="checkbox"/> <b>PTR-DM</b>	Gearbox driven medium speed PTO for one plug-in hydraulic pump	<input checked="" type="checkbox"/> <b>LOADIND</b>	Load indicator with central dashboard display
<input type="checkbox"/> <b>PTR-F</b>	Gearbox driven PTO with rear flange connection	<input type="checkbox"/> <b>REMC-MF</b>	Multi-functio wireless remote control
<input type="checkbox"/> <b>PTR-FH</b>	Gearbox driven high speed PTO with SAE drive flange	<input checked="" type="checkbox"/> <b>FIREXT3S</b>	Fire extinguisher - 3kg mounted on the seat base
<input type="checkbox"/> <b>PTR-FL</b>	Gearbox driven low speed PTO with SAE drive flange	<input type="checkbox"/> <b>WARNVEST</b>	High visibility warning vest - no sleeves
<input type="checkbox"/> <b>PTRD-D</b>	Gearbox driven HIGH SPEED PTO for two plug-in hydraulic pumps	<input checked="" type="checkbox"/> <b>WARNTRI2</b>	Roadside hazard warning triangle
<input type="checkbox"/> <b>PTRD-D1</b>	PTRD-D1 Gearbox driven HIGH SPEED PTO (1 SAE flange & 1 plug-in hydraulic pump)	<input type="checkbox"/> <b>AIDKIT</b>	First aid kit - Legal demand for EU markets including delivery to EU bodybuilder
<input type="checkbox"/> <b>PTRD-D2</b>	Gearbox driven HIGH SPEED PTO (2 SAE flanges & 1 plug-in hyd pump)	<input type="checkbox"/> <b>AIDKIT1B</b>	First aid kit - Legal demand for trucks transiting Germany
<input type="checkbox"/> <b>PTRD-F</b>	PTO with 1 DIN + 1 flange connection rear, manual gearbox	<input type="checkbox"/> <b>WARNLAMP</b>	Portable warning lamp
<input type="checkbox"/> <b>HPG-F101</b>	Parker F1-101 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> <b>LAMP-IN</b>	Inspection lamp
<input type="checkbox"/> <b>HPG-F41</b>	Parker F1-41 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> <b>BULBKIT</b>	Bulb and fuse kit
<input type="checkbox"/> <b>HPG-F51</b>	Parker F1-51 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> <b>WRITEPAD</b>	Writing pad
<input type="checkbox"/> <b>HPG-F61</b>	Parker F1-61 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input checked="" type="checkbox"/> <b>DST-CF4</b>	Driver seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input type="checkbox"/> <b>HPG-F81</b>	Parker F1-81 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> <b>DST-CF5</b>	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input checked="" type="checkbox"/> <b>STWPOS-R</b>	Steering wheel position - RIGHT-HAND DRIVE	<input type="checkbox"/> <b>DST-CF6</b>	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar, heat and ventilation controls with integrated seatbelt
<input type="checkbox"/> <b>STWM-LE</b>	Leather steering wheel	<input type="checkbox"/> <b>DST-LUX1</b>	Driver seat - Deluxe 1: electrical adjustment with memory function, lumbar support, heating & ventilation with integrated seatbelt
<input checked="" type="checkbox"/> <b>STGW-AD2</b>	Adjustable steering wheel with neck tilt	<input type="checkbox"/> <b>DST-LUX2</b>	Driver seat - Deluxe 2: electrical adjustment with memory function, lumbar support & heating with integrated seatbelt
<input type="checkbox"/> <b>ARSL</b>	Additional road speed limit - switch in dashboard	<input type="checkbox"/> <b>SBD-RED</b>	Seat belt colour - Red
<input checked="" type="checkbox"/> <b>ESP-BAS1</b>	Electronic Stability Control	<input type="checkbox"/> <b>PST-BAS1</b>	Passenger seat - Fixed non suspended fold up with seatbelt mounted on cab "B" post
<input type="checkbox"/> <b>ESPC-RO</b>	ESP (Electronic Stability Program) functionality control - Reduced / Off	<input type="checkbox"/> <b>PST-CF4</b>	Passenger seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input type="checkbox"/> <b>HWSS-AC</b>	Adaptive cruise control with forward collision warning	<input type="checkbox"/> <b>PST-CF5</b>	Passenger seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input type="checkbox"/> <b>HWSS-ACB</b>	Adaptive cruise control ACC with forward collision warning and AEBs advanced emergency brake system	<input type="checkbox"/> <b>PST-RX1</b>	Passenger seat - Fixed non suspended, features: 90-degree rotation and tilt function with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> <b>HWSS-FCB</b>	Forward collision warning with AEBs advanced emergency brake system	<input checked="" type="checkbox"/> <b>PST-STD2</b>	Passenger seat - Fixed with backrest adjustment, non suspended with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> <b>LSS-DW</b>	Lane departure-warning system	<input type="checkbox"/> <b>PST-STD4</b>	Passenger seat - Standard suspended with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> <b>LCS4</b>		<input type="checkbox"/> <b>SBPRE-PS</b>	Passenger seat belt pretensioner
<input type="checkbox"/> <b>DAS-W</b>	Driver Alert Support system	<input type="checkbox"/> <b>ARMRE-BB</b>	Armrests - Two on both driver & passenger seats
<input type="checkbox"/> <b>RSENS-W</b>	Rain sensing windscreen wipers	<input type="checkbox"/> <b>ARMRE-DB</b>	Armrests - Two on the driver seat
<input checked="" type="checkbox"/> <b>CU-ECC</b>	Cab Climate Unit - Electrically controlled air conditioning with sun sensor	<input type="checkbox"/> <b>ARMRE-PB</b>	Armrests - Two on the passenger seat
<input type="checkbox"/> <b>CU-ECC2</b>	Cab Climate Unit - Electrically controlled air conditioning with a carbon filter, sun, mist, and air quality sensor	<input type="checkbox"/> <b>ARU-BAS</b>	Armrest upholstery - Vinyl
<input checked="" type="checkbox"/> <b>IMMOBIL</b>	Thatcham H2 approved immobiliser	<input type="checkbox"/> <b>ARU-LEA</b>	Armrest upholstery - Leather
<input type="checkbox"/> <b>ALARM-E</b>	Enhanced vehicle alarm - Thatcham H1 approved - Cab plus external sensor for body/trailer	<input checked="" type="checkbox"/> <b>GRABHI-B</b>	Steel instep cab grab handle
<input type="checkbox"/> <b>ALCOLOCK</b>	Alcolock	<input type="checkbox"/> <b>GRABHI-L</b>	Leather covered instep cab grab handle
<input type="checkbox"/> <b>AMPL400</b>	Radio amplifier, 8 channel, 400 W with subwoofer Located in right hand external storage box	<input checked="" type="checkbox"/> <b>FMAT-RUB</b>	Footwell floor mats - Rubber
<input checked="" type="checkbox"/> <b>BUPMON</b>	Back up monitor - Digital reverse camera, parameter & lead supplied loose in cab.	<input type="checkbox"/> <b>FMAT-TX2</b>	Footwell floor mats - Two sets, Rubber and textile with an embossed pile supplied in the cab
<input type="checkbox"/> <b>ISUNS-BS</b>	Side sun visor - Driver & passenger side	<input checked="" type="checkbox"/> <b>LBK80F</b>	Lower fixed bunk with wide middle section 815 in the centre x 2000 mm
<input checked="" type="checkbox"/> <b>ISUNS-DS</b>	Side sun visor - Driver-side	<input type="checkbox"/> <b>LBK80FRE</b>	Lower electrically operated recline bunk with wide middle section 815 in the centre x 2000 mm
<input type="checkbox"/> <b>ISUNF-RE</b>	Electrically operated textile interior sun blind	<input type="checkbox"/> <b>LBK80FRM</b>	Lower manually operated recline bunk with wide middle section 815 in the centre x 2000 mm
<input checked="" type="checkbox"/> <b>ISUNF-RM</b>	Manually operated textile interior sun blind	<input type="checkbox"/> <b>MATL-FI</b>	Firm lower bunk pocket sprung mattress
<input checked="" type="checkbox"/> <b>CSPL-BX</b>	Lower center dash open storage box	<input type="checkbox"/> <b>MATL-FI4</b>	Lower mattress - firm, memory foam, 2000x700x130 mm
<input type="checkbox"/> <b>CSPL-BXD</b>	Lower centre dash drawer	<input checked="" type="checkbox"/> <b>MATL-SF</b>	Lower flexizone mattress - semi-firm, pocket springs up to 100kg - 16 stone

Standard Equipment

Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

# MODEL RANGE

## NEW FH Battery Electric 4x2 Tractor - Full Air Suspension FH 42T E

<input type="checkbox"/> <b>OLMAT-BA</b>	35mm mattress overlay protector	<input checked="" type="checkbox"/> <b>MIRCFPCS</b>	Mirrors - Electrically heated and operated main and wide-angle with manually adjusted kerb view mirror on the passenger side and position camera in nearside mirror arm.
<input type="checkbox"/> <b>OLMAT-PR</b>	50mm premium mattress overlay protector	<input checked="" type="checkbox"/> <b>AMIR-F20</b>	Auxiliary front view mirror with a 200mm radius
<input type="checkbox"/> <b>TBK60AD</b>	Height adjustable foldable top bunk 600 x 1900mm	<input type="checkbox"/> <b>SUNV-H</b>	External smoke grey sunvisor
<input type="checkbox"/> <b>TBK60F</b>	Fixed foldable top bunk 600 x 1900mm	<input type="checkbox"/> <b>AD-ROOF</b>	Cab roof deflector - Adjustable
<input type="checkbox"/> <b>TBK70AD</b>	Height adjustable foldable top bunk 700 x 1900mm	<input type="checkbox"/> <b>AD-SIDEL</b>	Cab side deflector - Long extension panels.
<input type="checkbox"/> <b>TBK70F</b>	Fixed foldable top bunk 700 x 1900mm	<input checked="" type="checkbox"/> <b>ADCF-F</b>	Additional black edging on chassis side skirt
<input checked="" type="checkbox"/> <b>CCPARK</b>	Cab parking climate - fitted	<input type="checkbox"/> <b>HLP-ST</b>	Headlamp protection
<input checked="" type="checkbox"/> <b>SLCP-BAS</b>	Sleeper control panel - Basic with switches for interior light, night heater, roof hatch and door lock	<input checked="" type="checkbox"/> <b>DRL-LED</b>	V-shaped daytime running lights
<input type="checkbox"/> <b>SLCP-LUX</b>	Sleeper control panel - Luxury with switches for interior light, night heater, roof hatch, door lock, alarm clock, window and radio	<input type="checkbox"/> <b>DRIVL2</b>	Two spot lamps
<input type="checkbox"/> <b>SAFE</b>	Safe box for driver's personal items	<input checked="" type="checkbox"/> <b>UDRIVL</b>	Auxiliary driving lights - Without
<input type="checkbox"/> <b>RUS-BAS</b>	Rear cab upper storage - 300 mm high	<input checked="" type="checkbox"/> <b>FOGL-WC</b>	Front fog lights
<input type="checkbox"/> <b>RUS-HIG</b>	Rear cab upper storage - 440 mm high - volume 245 litres	<input checked="" type="checkbox"/> <b>CL-STAT</b>	Static corner lights
<input type="checkbox"/> <b>TABLE</b>	Folding and height adjustable table - on lower bunk	<input type="checkbox"/> <b>ASL-RF2</b>	Two Hella H11 70W spotlamps in sign box
<input type="checkbox"/> <b>REFR-RUS</b>	Fridge - 28 litre rear upper wall mounted with dividers	<input type="checkbox"/> <b>BEACOA2F</b>	Roof beacons - Two front roof mounted amber LED
<input type="checkbox"/> <b>REFRIG</b>	Fridge - 33 litre under-bunk mounted with freezer dividers	<input type="checkbox"/> <b>BEACOA2R</b>	Roof beacons - Two rear roof mounted amber LED
<input type="checkbox"/> <b>MICRO-PK</b>	Wiring preparation kit for microwave oven	<input type="checkbox"/> <b>BEACON-P</b>	Roof beacons - wiring preparation only
<input checked="" type="checkbox"/> <b>BOTH-D</b>	One bottle holder under dashboard centre section	<input type="checkbox"/> <b>BEACONA4</b>	Roof beacons - Four amber LED - two front/ two rear
<input type="checkbox"/> <b>BOTH-DL</b>	Two bottle holders, one under dashboard centre section and one mounted to the under bunk drawer	<input checked="" type="checkbox"/> <b>CABPT-R1</b>	Single outlet for roof mounted accessories
<input type="checkbox"/> <b>BOTH-L</b>	One bottle holder mounted to the under bunk drawer	<input checked="" type="checkbox"/> <b>CABPT-R2</b>	Twin outlets for roof mounted accessories.
<input type="checkbox"/> <b>COFMA-PK</b>	Coffee maker, preparation kit.	<input type="checkbox"/> <b>SPOTP-F</b>	Spotlamp preparation in front, max 280W
<input checked="" type="checkbox"/> <b>INLI-BAS</b>	Interior white LED lights - basic	<input type="checkbox"/> <b>SPOTP-R</b>	Spotlamp preparation on roof, max 280W
<input type="checkbox"/> <b>INLI-NL</b>	Interior white and red night LED light with no dimmer	<input type="checkbox"/> <b>SPOTP-RF</b>	Spotlamp preparation on cab roof and in cab front, max 2x280W
<input type="checkbox"/> <b>INLI-NLD</b>	Interior white and red night LED light with dimmer	<input type="checkbox"/> <b>ROS-IL</b>	Globetrotter roof sign illuminated
<input type="checkbox"/> <b>ARL-FLEX</b>	Two flexible reading lamps (snake lamps)	<input type="checkbox"/> <b>ROS-IL2</b>	Preparation kit for illuminated roof sign with switch loose in cab, fit after registration
<input checked="" type="checkbox"/> <b>RH-EE</b>	Fixed tinted glass sky window with emergency exit	<input type="checkbox"/> <b>ROS-ILP</b>	Roof sign illumination preparation kit
<input type="checkbox"/> <b>RH-ER</b>	Steel roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> <b>CSGN-GTR</b>	"Globetrotter" headboard logo
<input type="checkbox"/> <b>RH-ETR</b>	Tinted glass roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> <b>HORN-F1S</b>	Horn - Air single tone - chassis mounted
<input type="checkbox"/> <b>RH-MTR</b>	Tinted glass roof hatch - Manually operated, rear opening with emergency exit	<input type="checkbox"/> <b>HORN-R2S</b>	Horn - Air - Two roof-mounted
<input type="checkbox"/> <b>SWIND-BS</b>	Extra side window on both sides behind "B" pillar	<input type="checkbox"/> <b>ANT-CBR</b>	Roof mounted antenna for CB radio, single aerial. Only Globetrotter cabs brings in extra DIN slots.
<input type="checkbox"/> <b>AS-FUS</b>	Extra shelf in front upper storage compartments	<input type="checkbox"/> <b>ACCB-R-AP</b>	Front, middle & rear roof mounted accessory brackets
<input type="checkbox"/> <b>INFOT-PK</b>	Preparation kit for the mounting of a flat screen TV in cab above the driver's door, includes bracket, electrical and speaker connections	<input type="checkbox"/> <b>ACCB-R-F</b>	Front roof mounted accessory bracket
		<input type="checkbox"/> <b>ACCB-R-FM</b>	Front & middle roof mounted accessory brackets
		<input type="checkbox"/> <b>ACCB-R-FR</b>	Front & rear roof mounted accessory brackets
		<input type="checkbox"/> <b>ACCB-R-M</b>	Middle roof mounted accessory bracket
		<input type="checkbox"/> <b>ACCB-R-R</b>	Rear roof mounted accessory bracket
		<input type="checkbox"/> <b>ACCB-R-RM</b>	Rear & middle roof mounted accessory brackets
		<input type="checkbox"/> <b>STUC-B</b>	Left and right storage compartments under cab
		<input type="checkbox"/> <b>STUC-L</b>	Left storage compartment under cab
		<input type="checkbox"/> <b>STUC-R</b>	Right storage compartment under cab
		<input type="checkbox"/> <b>RFCAR-BC</b>	Rear mudwing carrier, back of cab
		<input type="checkbox"/> <b>LADDER</b>	Ladder back of cab
		<input type="checkbox"/> <b>REFS-TW</b>	White cab conspicuity markings by packed in cab
		<input type="checkbox"/> <b>REFS-TY</b>	Yellow cab conspicuity markings by packed in cab
			<b>SUPERSTRUCTURE PREPARATIONS</b>
		<input type="checkbox"/> <b>5WM-ASL</b>	Fifth wheel mount - Air operated slider with 4mm L profiles
		<input type="checkbox"/> <b>5WM-ASM</b>	Fifth wheel mount - Air operated slider with 50mm L profiles
		<input type="checkbox"/> <b>5WM-ISOL</b>	Fifth wheel mount - Flush L profiles with 12mm ISO plate - 16mm high above chassis frame
		<input checked="" type="checkbox"/> <b>5WM-ISOM</b>	Fifth wheel mount - 50mm L profiles with 10mm ISO plate - 60mm high above chassis frame
		<input type="checkbox"/> <b>5WM-LPRO</b>	Fifth wheel mount - Direct to frame with inverted 'L'-profiles
		<input checked="" type="checkbox"/> <b>5WT-FO14</b>	Fifth wheel - Fontaine 150SP2 pressed steel
		<input type="checkbox"/> <b>5WT-FO15</b>	Fifth wheel - Fontaine 3000 lightweight cast air operated slider - for moderate duty off-road.
		<input type="checkbox"/> <b>5WT-JO8</b>	Fifth wheel - Jost JSK 37 cast
		<input type="checkbox"/> <b>5WT-JO9</b>	Fifth wheel - Jost JSK 42 cast

Standard Equipment

Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

# MODEL RANGE

## NEW FH Battery Electric 4x2 Tractor - Full Air Suspension FH 42T E

<input type="checkbox"/> <b>5WT-SH</b>	Fifth wheel - SAF-Holland/+GF+ SK-S 36.20 cast	<b>DELIVERY SERVICES</b>	
<input type="checkbox"/> <b>5WH140</b>	Leg-height - 140 mm	<input type="checkbox"/> <b>FMS-PK</b>	Fleet Management System gateway - required for aftermarket telematics
<input type="checkbox"/> <b>5WH150</b>	Leg-height - 150 mm	<input type="checkbox"/> <b>DRUT1</b>	Driver utility app - "My Truck" - 1 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription
<input type="checkbox"/> <b>5WH160</b>	Leg-height - 160 mm	<input type="checkbox"/> <b>DRUT2</b>	Driver utility app - "My Truck" - 2 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription
<input type="checkbox"/> <b>5WH175</b>	Leg-height - 175mm	<input type="checkbox"/> <b>DRUT3</b>	Driver utility app - "My Truck" - 3 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription
<input type="checkbox"/> <b>5WH185</b>	Leg-height - 185 mm	<input type="checkbox"/> <b>DRUT4</b>	Driver utility app - "My Truck" - 4 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription
<input type="checkbox"/> <b>5WH195</b>	Leg-height - 195mm	<input type="checkbox"/> <b>DRUT5</b>	Driver utility app - "My Truck" - 5 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription
<input type="checkbox"/> <b>5WH200</b>	Leg-height - 200 mm		
<input type="checkbox"/> <b>5WH205</b>	Leg-height - 205 mm		
<input type="checkbox"/> <b>5WH210</b>	Leg-height - 210 mm		
<input type="checkbox"/> <b>5WH220</b>	Leg-height - 220mm		
<input type="checkbox"/> <b>5WH230</b>	Leg-height - 230 mm		
<input checked="" type="checkbox"/> <b>5WLM-B</b>	Maintenance - Basic fifth wheel - standard top plate		
<input type="checkbox"/> <b>5WLM-L</b>	Maintenance - Low maintenance with nylon top plate		
<input type="checkbox"/> <b>5WL-S1</b>	Fifthwheel lubrication - Locking mechanism and top plate		
<input type="checkbox"/> <b>5WL-S2</b>	Fifthwheel lubrication - Locking mechanism only		
<input type="checkbox"/> <b>TCIND</b>	Trailer connection indicator - Sensors for height, kingpin and coupling lock		
<input checked="" type="checkbox"/> <b>RDECK</b>	Catwalk - Single plate and step		
<input type="checkbox"/> <b>RDECK-M</b>	Catwalk - Extended with two plates and step		
<input type="checkbox"/> <b>SRWL-2RA</b>	Chassis-mounted working lamps - Two amber rear-mounted LED lamps and 3 position switch		
<input type="checkbox"/> <b>SRWL-2RW</b>	Chassis-mounted working lamps - Two white rear-mounted LED lamps and 3 position switch		
<input type="checkbox"/> <b>SRWL-PK</b>	Chassis-mounted working lamps - Side work and reverse lamp preparation and 3 position switch - Max load 280W		
<input type="checkbox"/> <b>SWL-2RA</b>	Chassis-mounted working lamps - Two ambe rear-mounted LED lamps		
<input type="checkbox"/> <b>SWL-2RW</b>	Chassis-mounted working lamps - Two white rear-mounted LED lamps		
<input type="checkbox"/> <b>SWL-PK</b>	Chassis-mounted working lamps - Side work lamp preparation and 2 position switch - Max load 280W		
<input checked="" type="checkbox"/> <b>WL-TA1W</b>	Coupling light - White		
<input type="checkbox"/> <b>WLC-H2A</b>	Two H3/70W working lamps with amber coloured lens high mounted back of cab		
<input type="checkbox"/> <b>WLC-H2W</b>	Two H3/70W white working lamps high mounted on the back of cab		
<input type="checkbox"/> <b>WLC-PKH</b>	Preparation kit, cables and switch for high mounted working lamps back of cab		
<input type="checkbox"/> <b>WLC-PKL</b>	Preparation kit, cables and switch for low mounted working lamps back of cab		
<input type="checkbox"/> <b>WLC-PKLH</b>	Preparation kit - cables and switch for low and high mounted working lamps back of cab.		
<input checked="" type="checkbox"/> <b>ECBB-BAS</b>	Bodybuilder electrical centre without bodybuilder module		
<input type="checkbox"/> <b>ECBB-HIG</b>	Body builder electrical centre with body builder module		
<input type="checkbox"/> <b>ECBB-MED</b>			
<input type="checkbox"/> <b>BBCHAS1</b>	One 7-pole connector for Body builder interface		
<input type="checkbox"/> <b>BBCHAS3</b>	Three 7-pole connectors for Body builder interface		
<input type="checkbox"/> <b>BEPR-T2</b>	Body builder electrical software preparation for tipper with remote control		
<input type="checkbox"/> <b>EXSTER</b>	External steering control - Volvo dynamic steering and bodybuilder module prepared for external control system, installed and computer by bodybuilder		
<input type="checkbox"/> <b>TD-BAS</b>	Trailer detection WITHOUT LED sensing		
<input type="checkbox"/> <b>TD-LED</b>	Trailer detection with LED sensing		
<input type="checkbox"/> <b>AUXL-SPK</b>	Electrical preparation kit - wiring and switch for snow plough lights		
<input type="checkbox"/> <b>TAILPRE2</b>	Tail lift preparation kit, wireless remote operation		
<input type="checkbox"/> <b>TAILPREP</b>	Taillift preparation kit - cab switch and warning in driver display		
<input type="checkbox"/> <b>AESW2</b>	Two Body builder bistable electrical switches (marked AUX1 / AUX2)		
<input type="checkbox"/> <b>AESW2PK</b>	2 Body builder bistable el.switches (marked AUX1/AUX2) and prep. for 4 more switches		
<input type="checkbox"/> <b>AUXSW-4</b>	Wiring for 4 extra switches (from Body builder electrical centre to switch positions)		
<input checked="" type="checkbox"/> <b>Standard Equipment</b>	<input type="checkbox"/> <b>Optional Equipment</b>		

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

# MODEL RANGE

NEW FH Battery Electric 4x2 Tractor - Full Air Suspension FH 42T E

---

Volvo Trucks. Driving Progress