


MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

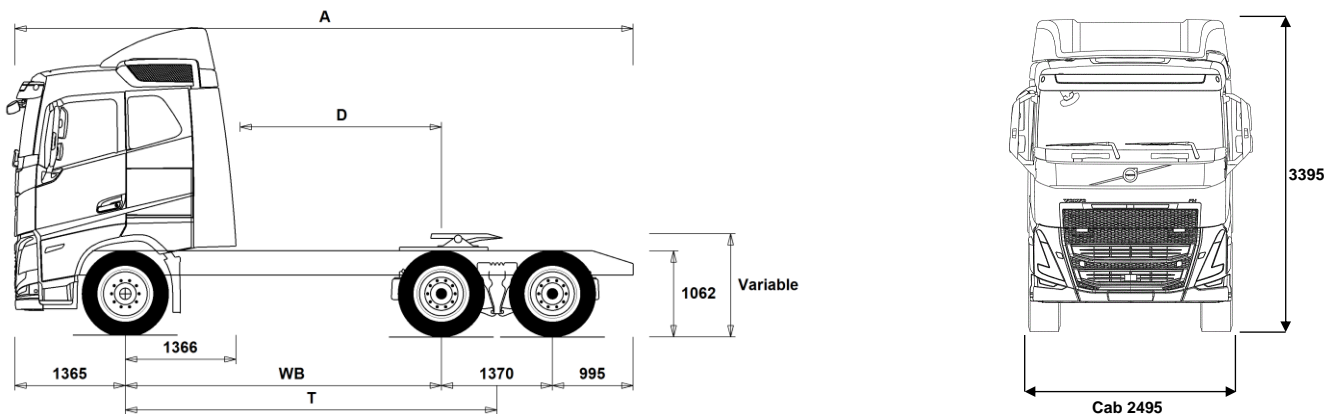

Chassis Dimensions [mm]

WB Wheelbase	3900
A Overall Chassis Length	7630
D Center of rear axle to back of cab	2484
F Fifth Wheel Position (EC Directive 96/53)	775
T Theoretical Wheelbase	4585

Chassis Weights [kg]

Front Axle	6380
Rear Bogie	5230
Kerb Weight	11610

Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	16100
Turning Circle Diameter Wall to Wall	17400

Plated Weights [kg]

	Plated	Design
Gross Vehicle Weight	26000	29000
Gross Combination Weight	44000	44000
Front Axle	8000	8000
Rear Bogie	19000	21000

Important Notes

Chassis Dimensions

Cab Height: -2413 mm for CAB-HSLP, -2413 mm for CAB-LSLP, -2413 mm for CAB-XHSL.

D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.

Height can vary ± 20 mm for leaf and ± 10 mm for air suspension. All dimensions are for unladen chassis and any tag axles down.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres:	315/80R22.5
Drive Axle Tyres:	315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary ± 10%.

Turning diameters are theoretically calculated.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FH64TE.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

TRUCK USE

- **DRM-BE** Balanced & Economy Drive Mode
- **PVT-MAP** I-See Predictive Cruise Control - using map based topography information
- **RC-SMOOT** Road Conditions - Smooth

CORE COMPONENTS

- **CHH-HIGH** Chassis Height - High - for loading heights check the unique BEP chassis drawing attached to this quote
- **RADD-GR** RADD-GR - 6x4/8x4 Air - High
- **FHE-HSLP** Cab - Globetrotter - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-LSLP** Cab - Low sleeper - with steel safety cage design. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-SLP** Cab - Sleeper - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-XHSL** Cab - Globetrotter XL - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **EPT2412** Gearbox - I-shift Automated 12-speed - suitable for gross train weights up to 44tonne
- **NEM3** Number of Electrical Motors - 3 - Output 490 kW – 666hp continuous power
- **RTS2370A** Drive Axles - RTS2370A 23-tonne single reduction tandem with differential and cross locks*- design GCW 70tonne
* Cross locks replaced by a dog clutch if tandem axle lift is specified

PACKAGES

- **INFONDF** Media Information Platform with Navigation & Volvo Connect "On board" Support
- **DRIV-E** Cab Package - Drive
- **DRIV-E+** Cab Package - Drive +
- **DRIV-E++** Cab Package - Drive +
- **1LIV-E** Sleep & Resting Package - Living one-bed
- **1LIV-E+** Sleep & Resting Package - Living one-bed +
- **1LIV-E++** Sleep & Resting Package - Living one-bed ++
- **2LIV-E** Sleep & Resting Package - Living two-bed
- **2LIV-E+** Sleep & Resting Package - Living two-bed +
- **2LIV-E++** Sleep & Resting Package - Living two-bed ++
- **SAFE-E** Active safety package
- **SAFE-E+** Active safety package +
- **RANGOPT3** Range Optimisation Package -3 years prepaid subscription
- **RANGOPT4** Range Optimisation Package - 4 years prepaid subscription
- **RANGOPT5** Range Optimisation Package - 5 years prepaid subscription

CHASSIS

- **FSLB-BAS** Front suspension levelling - basic stroke
- **FAL10.0** Front axle design capacity - 10 tonne - check tyre capacity
- **FAL8.5** Front axle design capacity - 8.5 tonnes
- **FAL9.0** Front axle design capacity - 9.0 tonne - check tyre capacity
- **FSTAB** Front anti-roll bar - Normal stiffness
- **FSTAB2** Front anti-roll bar - Medium stiffness
- **FSTAB3** Front anti-roll bar - High stiffness
- **RAL21** Rear bogie design capacity - 21 tonne
- **RAL23** Rear bogie design capacity - 23 tonne
- **RAL26** Rear bogie design capacity - 26 tonne
- **RSTAB1** Rear anti-roll bar - Normal stiffness
- **RSTAB3** Rear anti-roll bar - Stiff
- **RALIM105** Rear-axle load limiter - 10.5 tonne - speed controlled

- **RALIM115** Rear-axle load limiter -11.5 tonne - speed controlled
- **RALIM13** Rear-axle load limiter - 13 tonne
- **RALIM95** Rear-axle load limiter - 9.5 tonne
- **ASF-DL1** Air suspension with 1 driving level
- **ASF-DL3** Air suspension with 3 driving levels
- **ACTST-TO** Active Steering- Volvo Dynamic Steering - VDS - with extra electronic pump and torque overlay
- **ASFE-BAS** Active steering feature - Basic - Volvo Dynamic Steering - VDS - only
- **ASFE-OG** Active steering feature - Volvo Dynamic Steering - VDS - with stability assist - oversteer
- **ASFE-PO** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings and stability assist
- **ASFE-PS** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings
- **AUXPARK** Auxiliary parking brake - Additional spring brakes
- **FIL-EEEB** Chassis frame inner liner - From the end of the engine to the end of the bogie
- **FIL-TXEB** Chassis frame inner liner - From gearbox member to the end of the bogie
- **BBOX-EF** Battery box position - End of the frame in rear overhang
- **BATTAMP** Battery management - Voltage and current gauge
- **BATTIND** Battery management - Voltage, current and charge indicators
- **WHC-FOL1** One foldable wheel chock
- **WHC-FOL2** Two foldable wheel chocks
- **WHCP-F** Wheel chock carrier position - In the front part of the vehicle
- **WHCP-T** Wheel chock carrier position - Outer luggage locker
- **CHAIN-S** Snow chains
- **HOOK-SC** Snow chain hooks
- **TOWF-NO1** Front towing device - One detachable - stored in cab
- **TOWF-NO2** Front towing device - Two detachable - stored in cab
- **TOWR-ONE** Towing hitch attached to rear crossmember
- **TREL15** Trailer electrical connection - Single 15 pin - ADR certified
- **TREL7-7** Trailer electrical connection - 2 x 7 pin - 24N and 24S
- **TBC-DUO** Duomatic type air line connectors
- **TBC-EC** Trailer brakes with EC palm coupling connectors
- **TBC-GBR** 'C' and 'CA' type air line connectors
- **TRBR-HCF** Full pressure hand controlled trailer brake
- **TRBR-STA** Stationary trailer brake control
- **TRB-STRE** Stretch Brake - Automatic low speed trailer brake activation to avoid jack-knifing and improve steerability
- **RFEND-B** Three piece EC approved rear mud wings and spray flaps
- **RFH-BAS** Basic rear wing height
- **RFH-HIG** High rear wing height - higher wing tops
- **RFH-LOW** Lower rear wing height - shallower wing tops
- **BLIGHT-E** Emergency brake light

WHEELS & TYRES

- **RT-AL** Wheels - Alcoa brushed aluminium rims - standard holes for long stud fixing
- **RT-ALDP** Wheels - Alcoa Dura-Bright aluminium rims - standard holes for long stud fixing
- **RT-ALDPD** Wheels - Alcoa Dura-Bright EVO aluminium rims - countersunk holes for short stud fixing
- **RT-ALDU** Wheels - Alcoa brushed aluminium rims - countersunk holes for short stud fixing
- **SPWT-D** Spare wheel & tyre with rear tyre pattern
- **SPWT-F** Spare wheel & tyre with front tyre pattern
- **SWCP-T** Spare wheel supplied temporarily strapped to chassis
- **SWCP-TP** Temporary spare wheel carrier on top of chassis frame
- **JACK-12T** 12 tonne bottle jack
- **JACK-15T**

■ Standard Equipment □ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

<input type="checkbox"/> JACK-20T		<input type="checkbox"/> ISUNS-BS	Side sun visor - Driver & passenger side
<input checked="" type="checkbox"/> TOOL-BAS	Basic Toolkit	<input checked="" type="checkbox"/> ISUNS-DS	Side sun visor - Driver-side
<input type="checkbox"/> TOOLKIT	Complete tool kit	<input type="checkbox"/> ISUNF-RE	Electrically operated textile interior sun blind
<input type="checkbox"/> INFLAHOS	Tyre inflation hose	<input checked="" type="checkbox"/> ISUNF-RM	Manually operated textile interior sun blind
<input type="checkbox"/> GAUGE-TP	Tyre pressure gauge	<input checked="" type="checkbox"/> CSPL-BX	Lower center dash open storage box
DRIVELINE EQUIPMENT		<input type="checkbox"/> CSPL-BXD	Lower centre dash drawer
<input checked="" type="checkbox"/> CRUIS-E	Eco cruise control (with eco-roll and I-cruise, controls in steering wheel)	<input type="checkbox"/> ADFS	Two extra DIN slots in front shelf - can be fitted with card or drawer available as an accessory
<input type="checkbox"/> PTR-D	Gearbox PTO for plug-in pump, 0.71xeng speed	<input checked="" type="checkbox"/> BUPALARM	Reverse alarm
<input type="checkbox"/> PTR-DH	Gearbox driven high speed PTO for one plug-in hydraulic pump	<input type="checkbox"/> RTOLL-PK	Road toll PREPARATION kit for trucks operating with "Toll Collect" in Germany
<input type="checkbox"/> PTR-DM	Gearbox driven medium speed PTO for one plug-in hydraulic pump	<input checked="" type="checkbox"/> LOADIND	Load indicator with central dashboard display
<input type="checkbox"/> PTR-F	Gearbox driven PTO with rear flange connection	<input type="checkbox"/> REMC-MF	Multi-functio wireless remote control
<input type="checkbox"/> PTR-FH	Gearbox driven high speed PTO with SAE drive flange	<input checked="" type="checkbox"/> FIREXT3S	Fire extinguisher - 3kg mounted on the seat base
<input type="checkbox"/> PTR-FL	Gearbox driven low speed PTO with SAE drive flange	<input type="checkbox"/> WARNVEST	High visibility warning vest - no sleeves
<input type="checkbox"/> PTRD-D	Gearbox driven HIGH SPEED PTO for two plug-in hydraulic pumps	<input checked="" type="checkbox"/> WARNTRI2	Roadside hazard warning triangle
<input type="checkbox"/> PTRD-D1	PTRD-D1 Gearbox driven HIGH SPEED PTO (1 SAE flange & 1 plug-in hydraulic pump)	<input type="checkbox"/> AIDKIT	First aid kit - Legal demand for EU markets including delivery to EU bodybuilder
<input type="checkbox"/> PTRD-D2	Gearbox driven HIGH SPEED PTO (2 SAE flanges & 1 plug-in hyd pump)	<input type="checkbox"/> AIDKIT1B	First aid kit - Legal demand for trucks transiting Germany
<input type="checkbox"/> PTRD-F	PTO with 1 DIN + 1 flange connection rear, manual gearbox	<input type="checkbox"/> WARNLAMP	Portable warning lamp
<input type="checkbox"/> HPG-F101	Parker F1-101 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> LAMP-IN	Inspection lamp
<input type="checkbox"/> HPG-F41	Parker F1-41 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> BULBKIT	Bulb and fuse kit
<input type="checkbox"/> HPG-F51	Parker F1-51 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> WRITEPAD	Writing pad
<input type="checkbox"/> HPG-F61	Parker F1-61 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input checked="" type="checkbox"/> DST-CF4	Driver seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input type="checkbox"/> HPG-F81	Parker F1-81 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> DST-CF5	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input checked="" type="checkbox"/> STWPOS-R	Steering wheel position - RIGHT-HAND DRIVE	<input type="checkbox"/> DST-CF6	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar, heat and ventilation controls with integrated seatbelt
<input type="checkbox"/> STWM-LE	Leather steering wheel	<input type="checkbox"/> DST-LUX1	Driver seat - Deluxe 1: electrical adjustment with memory function, lumbar support, heating & ventilation with integrated seatbelt
<input checked="" type="checkbox"/> STGW-AD2	Adjustable steering wheel with neck tilt	<input type="checkbox"/> DST-LUX2	Driver seat - Deluxe 2: electrical adjustment with memory function, lumbar support & heating with integrated seatbelt
<input type="checkbox"/> ARSL	Additional road speed limit - switch in dashboard	<input type="checkbox"/> SBD-RED	Seat belt colour - Red
<input checked="" type="checkbox"/> ESP-BAS1	Electronic Stability Control	<input type="checkbox"/> PST-BAS1	Passenger seat - Fixed non suspended fold up with seatbelt mounted on cab "B" post
<input type="checkbox"/> ESPC-RO	ESP (Electronic Stability Program) functionality control - Reduced / Off	<input type="checkbox"/> PST-CF4	Passenger seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input type="checkbox"/> HWSS-AC	Adaptive cruise control with forward collision warning	<input type="checkbox"/> PST-CF5	Passenger seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input type="checkbox"/> HWSS-ACB	Adaptive cruise control ACC with forward collision warning and AEBS advanced emergency brake system	<input type="checkbox"/> PST-RX1	Passenger seat - Fixed non suspended, features: 90-degree rotation and tilt function with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> HWSS-FCB	Forward collision warning with AEBS advanced emergency brake system	<input checked="" type="checkbox"/> PST-STD2	Passenger seat - Fixed with backrest adjustment, non suspended with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> LSS-DW	Lane departure-warning system	<input type="checkbox"/> PST-STD4	Passenger seat - Standard suspended with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> LCS4		<input type="checkbox"/> SBPRE-PS	Passenger seat belt pretensioner
<input type="checkbox"/> DAS-W	Driver Alert Support system	<input type="checkbox"/> ARMRE-BB	Armrests - Two on both driver & passenger seats
<input type="checkbox"/> RSSENS-W	Rain sensing windscreen wipers	<input type="checkbox"/> ARMRE-DB	Armrests - Two on the driver seat
<input checked="" type="checkbox"/> CU-ECC	Cab Climate Unit - Electrically controlled air conditioning with sun sensor	<input type="checkbox"/> ARMRE-PB	Armrests - Two on the passenger seat
<input type="checkbox"/> CU-ECC2	Cab Climate Unit - Electrically controlled air conditioning with a carbon filter, sun, mist, and air quality sensor	<input type="checkbox"/> ARU-BAS	Armrest upholstery - Vinyl
<input checked="" type="checkbox"/> IMMOBIL	Thatcham H2 approved immobiliser	<input type="checkbox"/> ARU-LEA	Armrest upholstery - Leather
<input type="checkbox"/> ALARM-E	Enhanced vehicle alarm - Thatcham H1 approved - Cab plus external sensor for body/trailer	<input checked="" type="checkbox"/> GRABHI-B	Steel instep cab grab handle
<input type="checkbox"/> ALCOLOCK	Alcolock	<input checked="" type="checkbox"/> GRABHI-L	Leather covered instep cab grab handle
<input type="checkbox"/> AMPL400	Radio amplifier, 8 channel, 400 W with subwoofer Located in right hand external storage box	<input checked="" type="checkbox"/> FMAT-RUB	Footwell floor mats - Rubber
<input checked="" type="checkbox"/> BUPMON	Back up monitor - Digital reverse camera, parameter & lead supplied loose in cab.	<input type="checkbox"/> FMAT-TX2	Footwell floor mats - Two sets, Rubber and textile with an embossed pile supplied in the cab
<input checked="" type="checkbox"/> Standard Equipment		<input checked="" type="checkbox"/> LBK80F	Lower fixed bunk with wide middle section 815 in the centre x 2000 mm
<input type="checkbox"/> Optional Equipment			

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

<input type="checkbox"/> LBK80FRE	Lower electrically operated recline bunk with wide middle section 815 in the centre x 2000 mm	<input checked="" type="checkbox"/> FCABS-M	Front cab suspension - Mechanical spring
<input type="checkbox"/> LBK80FRM	Lower manually operated recline bunk with wide middle section 815 in the centre x 2000 mm	<input type="checkbox"/> RCABS-A	Rear cab suspension - Air
<input type="checkbox"/> MATL-FI	Firm lower bunk pocket sprung mattress	<input checked="" type="checkbox"/> RCABS-M	Rear cab suspension - Mechanical spring
<input type="checkbox"/> MATL-FI4	Lower mattress - firm, memory foam, 2000x700x130 mm	<input type="checkbox"/> HCC-EXT	Exterior hood catch control
<input checked="" type="checkbox"/> MATL-SF	Lower flexizone mattress - semi-firm, pocket springs up to 100kg - 16 stone	<input checked="" type="checkbox"/> HCC-INEX	Exterior and interior hood catch control
<input type="checkbox"/> OLMAT-BA	35mm mattress overlay protector	<input checked="" type="checkbox"/> MIRCFPCS	Mirrors - Electrically heated and operated main and wide-angle with manually adjusted kerb view mirror on the passenger side and position camera in nearside mirror arm.
<input type="checkbox"/> OLMAT-PR	50mm premium mattress overlay protector	<input checked="" type="checkbox"/> AMIR-F20	Auxiliary front view mirror with a 200mm radius
<input type="checkbox"/> TBK60AD	Height adjustable foldable top bunk 600 x 1900mm	<input type="checkbox"/> SUNV-H	External smoke grey sunvisor
<input type="checkbox"/> TBK60F	Fixed foldable top bunk 600 x 1900mm	<input type="checkbox"/> AD-ROOF	Cab roof deflector - Adjustable
<input type="checkbox"/> TBK70AD	Height adjustable foldable top bunk 700 x 1900mm	<input type="checkbox"/> AD-SIDEL	Cab side deflector - Long extension panels.
<input type="checkbox"/> TBK70F	Fixed foldable top bunk 700 x 1900mm	<input checked="" type="checkbox"/> ADCF-F	Additional black edging on chassis side skirt
<input checked="" type="checkbox"/> CCPARK	Cab parking climate - fitted	<input type="checkbox"/> HLP-ST	Headlamp protection
<input checked="" type="checkbox"/> SLCP-BAS	Sleeper control panel - Basic with switches for interior light, night heater, roof hatch and door lock	<input checked="" type="checkbox"/> DRL-LED	V-shaped daytime running lights
<input type="checkbox"/> SLCP-LUX	Sleeper control panel - Luxury with switches for interior light, night heater, roof hatch, door lock, alarm clock, window and radio	<input type="checkbox"/> DRIVL2	Two spot lamps
<input type="checkbox"/> SAFE	Safe box for driver's personal items	<input checked="" type="checkbox"/> UDRIVL	Auxiliary driving lights - Without
<input type="checkbox"/> RUS-BAS	Rear cab upper storage - 300 mm high	<input checked="" type="checkbox"/> FOGL-WC	Front fog lights
<input type="checkbox"/> RUS-HIG	Rear cab upper storage - 440 mm high - volume 245 litres	<input checked="" type="checkbox"/> CL-STAT	Static corner lights
<input type="checkbox"/> TABLE	Folding and height adjustable table - on lower bunk	<input type="checkbox"/> ASL-RF2	Two Hella H11 70W spotlamps in sign box
<input type="checkbox"/> REFR-RUS	Fridge - 28 litre rear upper wall mounted with dividers	<input type="checkbox"/> BEACOA2F	Roof beacons - Two front roof mounted amber LED
<input type="checkbox"/> REFRIG	Fridge - 33 litre under-bunk mounted with freezer dividers	<input type="checkbox"/> BEACOA2R	Roof beacons - Two rear roof mounted amber LED
<input type="checkbox"/> MICRO-PK	Wiring preparation kit for microwave oven	<input type="checkbox"/> BEACON-P	Roof beacons - wiring preparation only
<input checked="" type="checkbox"/> BOTH-D	One bottle holder under dashboard centre section	<input type="checkbox"/> BEACONA4	Roof beacons - Four amber LED - two front/ two rear
<input type="checkbox"/> BOTH-DL	Two bottle holders, one under dashboard centre section and one mounted to the under bunk drawer	<input type="checkbox"/> CABPT-R1	Single outlet for roof mounted accessories
<input type="checkbox"/> BOTH-L	One bottle holder mounted to the under bunk drawer	<input checked="" type="checkbox"/> CABPT-R2	Twin outlets for roof mounted accessories.
<input type="checkbox"/> COFMA-PK	Coffee maker, preparation kit.	<input type="checkbox"/> SPOTP-F	Spotlamp preparation in front, max 280W
<input checked="" type="checkbox"/> INLI-BAS	Interior white LED lights - basic	<input type="checkbox"/> SPOTP-R	Spotlamp preparation on roof, max 280W
<input type="checkbox"/> INLI-NL	Interior white and red night LED light with no dimmer	<input type="checkbox"/> SPOTP-RF	Spotlamp preparation on cab roof and in cab front, max 2x280W
<input type="checkbox"/> INLI-NLD	Interior white and red night LED light with dimmer	<input type="checkbox"/> ROS-IL	Globetrotter roof sign illuminated
<input type="checkbox"/> ARL-FLEX	Two flexible reading lamps (snake lamps)	<input type="checkbox"/> ROS-IL2	Preparation kit for illuminated roof sign with switch loose in cab, fit after registration
<input checked="" type="checkbox"/> RH-EE	Fixed tinted glass sky window with emergency exit	<input type="checkbox"/> ROS-ILP	Roof sign illumination preparation kit
<input type="checkbox"/> RH-ER	Steel roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> CSGN-GTR	"Globetrotter" headboard logo
<input type="checkbox"/> RH-ETR	Tinted glass roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> HORN-F1S	Horn - Air single tone - chassis mounted
<input type="checkbox"/> RH-MTR	Tinted glass roof hatch - Manually operated, rear opening with emergency exit	<input type="checkbox"/> HORN-R2S	Horn - Air - Two roof-mounted
<input type="checkbox"/> SWIND-BS	Extra side window on both sides behind "B" pillar	<input type="checkbox"/> ANT-CBR	Roof mounted antenna for CB radio, single aerial. Only Globetrotter cabs brings in extra DIN slots.
<input type="checkbox"/> AS-FUS	Extra shelf in front upper storage compartments	<input type="checkbox"/> ACCBR-AP	Front, middle & rear roof mounted accessory brackets
<input type="checkbox"/> INFOT-PK	Preparation kit for the mounting of a flat screen TV in cab above the driver's door, includes bracket, electrical and speaker connections	<input type="checkbox"/> ACCBR-F	Front roof mounted accessory bracket
		<input type="checkbox"/> ACCBR-FM	Front & middle roof mounted accessory brackets
		<input type="checkbox"/> ACCBR-FR	Front & rear roof mounted accessory brackets
		<input type="checkbox"/> ACCBR-M	Middle roof mounted accessory bracket
		<input type="checkbox"/> ACCBR-R	Rear roof mounted accessory bracket
		<input type="checkbox"/> ACCBR-RM	Rear & middle roof mounted accessory brackets
		<input type="checkbox"/> STUC-B	Left and right storage compartments under cab
		<input type="checkbox"/> STUC-L	Left storage compartment under cab
		<input type="checkbox"/> STUC-R	Right storage compartment under cab
		<input type="checkbox"/> RFCAR-BC	Rear mudwing carrier, back of cab
		<input type="checkbox"/> LADDER	Ladder back of cab
		<input type="checkbox"/> REFS-TW	White cab conspicuity markings by packed in cab
		<input type="checkbox"/> REFS-TY	Yellow cab conspicuity markings by packed in cab
			SUPERSTRUCTURE PREPARATIONS
		<input checked="" type="checkbox"/> 5WM-ISOM	Fifth wheel mount - 50mm L profiles with 10mm ISO plate - 60mm high above chassis frame
		<input checked="" type="checkbox"/> 5WT-JO8	Fifth wheel - Jost JSK 37 cast
		<input type="checkbox"/> 5WT-JO9	Fifth wheel - Jost JSK 42 cast
		<input type="checkbox"/> 5WT-SH	Fifth wheel - SAF-Holland/+GF+ SK-S 36.20 cast

Standard Equipment

Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

- | | |
|---|--|
| <ul style="list-style-type: none"> <input type="checkbox"/> 5WH150 Leg-height - 150 mm <input type="checkbox"/> 5WH185 Leg-height - 185 mm ■ 5WLM-B Maintenance - Basic fifth wheel - standard top plate <input type="checkbox"/> 5WL-S1 Fifthwheel lubrication - Locking mechanism and top plate <input type="checkbox"/> TCIND Trailer connection indicator - Sensors for height, kingpin and coupling lock ■ RDECK Catwalk - Single plate and step <input type="checkbox"/> RDECK-M Catwalk - Extended with two plates and step <input type="checkbox"/> SRWL-2RA Chassis-mounted working lamps - Two amber rear-mounted LED lamps and 3 position switch <input type="checkbox"/> SRWL-2RW Chassis-mounted working lamps - Two white rear-mounted LED lamps and 3 position switch <input type="checkbox"/> SRWL-PK Chassis-mounted working lamps - Side work and reverse lamp preparation and 3 position switch - Max load 280W <input type="checkbox"/> SWL-2RA Chassis-mounted working lamps - Two ambe rear-mounted LED lamps <input type="checkbox"/> SWL-2RW Chassis-mounted working lamps - Two white rear-mounted LED lamps <input type="checkbox"/> SWL-PK Chassis-mounted working lamps - Side work lamp preparation and 2 position switch - Max load 280W ■ WL-TA1W Coupling light - White <input type="checkbox"/> WLC-H2A Two H3/70W working lamps with amber coloured lens high mounted back of cab <input type="checkbox"/> WLC-H2W Two H3/70W white working lamps high mounted on the back of cab <input type="checkbox"/> WLC-PKH Preparation kit, cables and switch for high mounted working lamps back of cab <input type="checkbox"/> WLC-PKL Preparation kit, cables and switch for low mounted working lamps back of cab <input type="checkbox"/> WLC-PKLH Preparation kit - cables and switch for low and high mounted working lamps back of cab. ■ ECBB-BAS Bodybuilder electrical centre without bodybuilder module <input type="checkbox"/> ECBB-HIG Body builder electrical centre with body builder module <input type="checkbox"/> ECBB-MED <input type="checkbox"/> BBCHAS1 One 7-pole connector for Body builder interface <input type="checkbox"/> BBCHAS3 Three 7-pole connectors for Body builder interface <input type="checkbox"/> BEPR-T2 Body builder electrical software preparation for tipper with remote control <input type="checkbox"/> EXSTER External steering control - Volvo dynamic steering and bodybuilder module prepared for external control system, installed and computer by bodybuilder <input type="checkbox"/> TD-BAS Trailer detection WITHOUT LED sensing <input type="checkbox"/> TD-LED Trailer detection with LED sensing <input type="checkbox"/> AUXL-SPK Electrical preparation kit - wiring and switch for snow plough lights <input type="checkbox"/> TAILPRE2 Tail lift preparation kit, wireless remote operation <input type="checkbox"/> TAILPREP Taillift preparation kit - cab switch and warning in driver display <input type="checkbox"/> AESW2 Two Body builder bistable electrical switches (marked AUX1 / AUX2) <input type="checkbox"/> AESW2PK 2 Body builder bistable el.switches (marked AUX1/AUX2) and prep. for 4 more switches <input type="checkbox"/> AUXSW-4 Wiring for 4 extra switches (from Body builder electrical centre to switch positions) | <ul style="list-style-type: none"> <input type="checkbox"/> DRUT4 Only available with Volvo Connect subscription
Driver utility app - "My Truck" - 4 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription <input type="checkbox"/> DRUT5 Only available with Volvo Connect subscription
Driver utility app - "My Truck" - 5 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription |
|---|--|

DELIVERY SERVICES

- FMS-PK** Fleet Management System gateway - required for aftermarket telematics
- DRUT1** Driver utility app - "My Truck" - 1 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
- DRUT2** Driver utility app - "My Truck" - 2 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
- DRUT3** Driver utility app - "My Truck" - 3 year subscription
For mobile phone, tablet, with android and IOS systems.

■ Standard Equipment □ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification.
The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

Volvo Trucks. Driving Progress