


MODEL RANGE

NEW FM Battery Electric 6x4 Tractor - Full Air Suspension FM 64T E

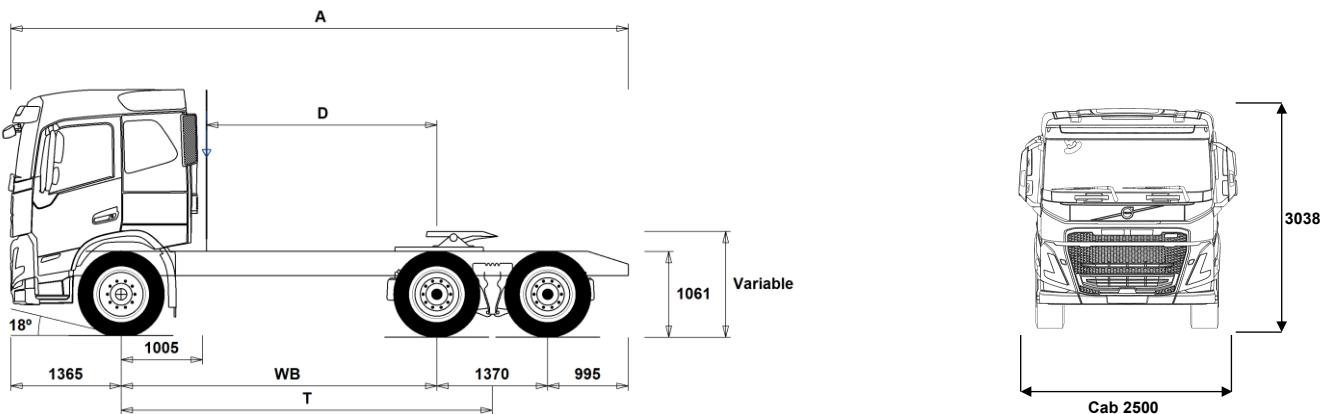

Chassis Dimensions [mm]

WB Wheelbase	3900
A Overall Chassis Length	7630
D Center of rear axle to back of cab	2845
F Fifth Wheel Position (EC Directive 96/53)	775
T Theoretical Wheelbase	4585

Chassis Weights [kg]

Front Axle	6340
Rear Bogie	5720
Kerb Weight	12060

Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	16100
Turning Circle Diameter Wall to Wall	17500

Plated Weights [kg]

	Plated	Design
Gross Vehicle Weight	26000	29500
Gross Combination Weight	44000	44000
Front Axle	8000	8500
Rear Bogie	19000	21000

Important Notes

Chassis Dimensions

Cab Height: +370 mm for CAB-HSLP, -208 mm for CAB-LSLP.
D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.
Height can vary ± 20 mm for leaf and ± 10 mm for air suspension.
All dimensions are for unladen chassis and any tag axles down.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres: 315/80R22.5
Drive Axle Tyres: 315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary ± 3%.

Turning diameters are theoretically calculated.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FM64TE.

MODEL RANGE

NEW FM Battery Electric 6x4 Tractor - Full Air Suspension FM 64T E

TRUCK USE

RC-SMOOT Road Conditions - Smooth

CORE COMPONENTS

- CHH-HIGH** Chassis height - High - for loading heights check the unique BEP chassis drawing attached to this quote
- RADD-GR** RADD-GR - 6x4/8x4 Air - High
- FME-HSL6** Cab - Globetrotter sleeper, all-steel safety cage design with a roof-mounted emergency escape hatch.
Designed and built to Swedish impact and ECE R29 regulations
- FME-LSL6** Cab - Low sleeper, with steel safety cage design
Designed and built to Swedish impact and ECE R29 regulations
- FME-SLP6** Cab - Sleeper, all-steel safety cage design with a roof-mounted emergency escape hatch.
Designed and built to Swedish impact and ECE R29 regulations
- ESS450K** Energy storage system - Total energy 450 kWh
- ESS540K** Energy storage system - Total energy 540 kWh
- EPT2412** Gearbox - I-shift Automated 12-speed - suitable for gross train weights up to 44tonne
- NEM2** Electric Motors - 2 - Output 330 kW - 450hp continuous power
- NEM3** Electric Motors - 3 - Output 490 kW - 666hp continuous power
- RTS2370A** Drive axles - RTS2370A 23-tonne single reduction tandem with differential and cross locks* - design GCW 70tonne
* Cross locks replaced by a dog clutch if tandem axle lift is specified

PACKAGES

- INFOHIGH** Media Information Platform - Medium level
- DRIV-EXT** Cab package - Drive Extended
- DRIV-SEL** Cab Package - Drive Select
- 1LIVFM-E** Sleep & Resting Package - Living one-bed
- 2LIVFM-E** Sleep & Resting Package - Living two-bed
- SAFE-EXT** Safety Package - Extended
- SAFE-SEL** Safety Package - Select
- RANGOPS** Range Optimisation Package - 5 years prepaid subscription

CHASSIS

- FST-AIR** Front suspension type - Air
- FSLS-BAS** Front suspension levelling - basic stroke
- FAL10.0** Front axle design capacity - 10 tonne - check tyre capacity
- FAL8.5** Front axle design capacity - 8.5 tonnes
- FAL9.0** Front axle design capacity - 9.0 tonne - check tyre capacity
- FSTAB** Front anti-roll bar - Normal stiffness
- FSTAB2** Front anti-roll bar - Medium stiffness
- FSTAB3** Front anti-roll bar - High stiffness
- RAL21** Rear bogie design capacity - 21 tonne
- RAL23** Rear bogie design capacity - 23 tonne
- RAL26** Rear bogie design capacity - 26 tonne
- RSTAB1** Rear anti-roll bar - Normal stiffness
- RSTAB3** Rear anti-roll bar - Stiff
- RALIM105** Rear-axle load limiter - 10.5 tonne - speed controlled
- RALIM115** Rear-axle load limiter - 11.5 tonne - speed controlled
- RALIM13** Rear-axle load limiter - 13 tonne
- RALIM95** Rear-axle load limiter - 9.5 tonne
- ASF-DL1** Air suspension with 1 driving level
- ACTST-TO** Active Steering- Volvo Dynamic Steering - VDS - with extra electronic pump and torque overlay
- ASFE-BAS** Active steering feature - Basic - Volvo Dynamic Steering - VDS - only
- ASFE-OG** Active steering feature - Volvo Dynamic Steering - VDS - with stability assist - oversteer

■ Standard Equipment

□ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification.
The specification can vary from country to country.

- | | |
|-------------------|---|
| □ ASFE-PO | Active steering feature - Volvo Dynamic Steering - VDS - with personal settings and stability assist |
| □ ASFE-PS | Active steering feature - Volvo Dynamic Steering - VDS - with personal settings |
| □ AUXPARK | Auxiliary parking brake - Additional spring brakes |
| ■ RST-AIR | Rear suspension type - Air |
| □ RST-AIR6 | |
| ■ FRAME300 | Chassis frame section external height - 300 mm |
| ■ FST8080 | Chassis frame thickness - 8 mm web and flange |
| □ FIL-EEEB | Chassis frame inner liner - From the end of the engine to the end of the bogie |
| ■ FIL-TXEB | Chassis frame inner liner - From gearbox member to the end of the bogie |
| ■ BBOX-EF | Battery box position - End of the frame in rear overhang |
| ■ BATTAMP | Battery management - Voltage and current gauge |
| □ BATTIND | Battery management - Voltage, current and charge indicators |
| □ WHC-FOL1 | One foldable wheel chock |
| □ WHC-FOL2 | Two foldable wheel chocks |
| □ WHCP-F | Wheel chock carrier position - In the front part of the vehicle |
| □ WHCP-T | Wheel chock carrier position - Outer luggage locker |
| □ CHAIN-S | Snow chains |
| □ HOOK-SC | Snow chain hooks |
| ■ TOWF-NO1 | Front towing device - One detachable - stored in cab |
| □ TOWF-NO2 | Front towing device - Two detachable - stored in cab |
| □ TOWR-ONE | Towing hitch attached to rear crossmember |
| □ TREL15 | Trailer electrical connection - Single 15 pin - ADR certified |
| ■ TREL7-7 | Trailer electrical connection - 2 x 7 pin - 24N and 24S |
| □ TBC-DUO | Trailer brake connections - Duomatic type |
| □ TBC-EC | Trailer brake connections - EC palm coupling connectors |
| ■ TBC-GBR | Trailer brake connections - 'C' and 'CA' type |
| ■ TRBR-STA | Stationary trailer brake control |
| □ TRB-STRE | Stretch Brake - Automatic low speed trailer brake activation to avoid jack-knifing and improve steerability |
| ■ RFEND-B | Rear mud wings - Three piece EC approved and spray flaps |
| ■ RFH-BAS | Basic rear wing height |
| □ RFH-HIG | High rear wing height - higher wing tops |
| □ RFH-LOW | Lower rear wing height - shallower wing tops |
| ■ BLIGHT-E | Emergency brake light |

WHEELS & TYRES

- | | |
|-------------------|--|
| ■ RT-AL | Wheels - Howmet Alcoa brushed aluminium rims - standard holes for long stud fixing |
| □ RT-ALDP | Wheels - Howmet Alcoa Dura-Bright aluminium rims - standard holes for long stud fixing |
| □ RT-ALDPD | Wheels - Howmet Alcoa Dura-Bright EVO aluminium rims - countersunk holes for short stud fixing |
| □ RT-ALDU | Wheels - Howmet Alcoa brushed aluminium rims - countersunk holes for short stud fixing |
| □ SPWT-D | Spare wheel & tyre with rear tyre pattern |
| □ SPWT-F | Spare wheel & tyre with front tyre pattern |
| □ SWCP-T | Spare wheel supplied temporarily strapped to chassis |
| □ SWCP-TP | Temporary spare wheel carrier on top of chassis frame |
| □ JACK-12T | 12 tonne bottle jack |
| □ JACK-15T | 15 tonne bottle jack |
| □ JACK-20T | 20 tonne bottle jack |
| ■ TOOL-BAS | Basic Toolkit |
| □ TOOLKIT | Complete tool kit |
| □ INFLAHOS | Tyre inflation hose |
| □ GAUGE-TP | Tyre pressure gauge |

MODEL RANGE

NEW FM Battery Electric 6x4 Tractor - Full Air Suspension FM 64T E

DRIVELINE EQUIPMENT

- DRM-B** Drive mode - Balanced
- DRM-BE** Drive mode - Balanced & Economy
- PVT-MAP** I-See Predictive Cruise Control - using map-based topography information
- EP400A** Electric Power Outlet Voltage - 400V AC
- PTR-D** Gearbox PTO for plug-in pump, 0.71xeng speed
- PTR-DH** Gearbox driven high speed PTO for one plug-in hydraulic pump
- PTR-DM** Gearbox driven medium speed PTO for one plug-in hydraulic pump
- PTR-F** Gearbox driven PTO with rear flange connection
- PTR-FH** Gearbox driven high speed PTO with SAE drive flange
- PTR-FL** Gearbox driven low speed PTO with SAE drive flange
- PTRD-D** Gearbox driven HIGH SPEED PTO for two plug-in hydraulic pumps
- PTRD-D1** PTRD-D1 Gearbox driven HIGH SPEED PTO (1 SAE flange & 1 plug-in hydraulic pump)
- PTRD-D2** Gearbox driven HIGH SPEED PTO (2 SAE flanges & 1 plug-in hyd pump)
- PTRD-F** PTO with 1 DIN + 1 flange connection rear, manual gearbox
- HPG-F101** Gearbox mounted hydraulic pump - Parker F1-101 hydraulic pump gearbox mounted
- HPG-F41** Gearbox mounted hydraulic pump - Parker F1-41 gearbox mounted, fixed displacement, single flow
- HPG-F51** Gearbox mounted hydraulic pump - Parker F1-51 gearbox mounted, fixed displacement, single flow
- HPG-F61** Gearbox mounted hydraulic pump - Parker F1-61 gearbox mounted, fixed displacement, single flow
- HPG-F81** Gearbox mounted hydraulic pump - Parker F1-81 gearbox mounted, fixed displacement, single flow
- CRUIS-E** Eco cruise control (with eco-roll and i-cruise, controls in steering wheel)
- DTRI-PER** Dashboard in darker peregrine greyish brown. Steering wheel grey and door panels in light beige for FH and black for FH16.
- STWPOS-R** Steering wheel position - RIGHT-HAND DRIVE
- STWM-LE** Steering wheel - Leather
- STGW-AD2** Steering wheel adjustment - Neck tilt, column height and angle
- STGW-ADJ** Steering wheel adjustment - Column height and angle
- 1DAYDIG4** Smart tachograph - Continental VDO 4.1 version 2 - legal demand from 21/08/2023
- TAC-PK2** Tachograph prep Kit
- ARSL** Additional road speed limit - switch in dashboard
- ESP-BAS1** Electronic Stability Control ESC
- ESPC-RO** Additional ESC functions - Reduced / Off
- HWSS-AC** Forward collision warning with adaptive cruise control WITHOUT AEBS advanced emergency brake system
- HWSS-ACB** Forward collision warning with adaptive cruise control and AEBS advanced emergency brake system
- HWSS-FCB** Forward collision warning with AEBS advanced emergency brake system
- LSS-DW** Lane departure-warning system
- LSS-DW3** Lane departure warning system with pilot assist
- LCS4** Side Collision Avoidance Support - passenger and driver side
- DAS-W** Driver Alert Support system
- RSENS-W** Rain sensing windscreen wipers
- CU-ECC** Cab climate Unit - Electrically controlled air conditioning with sun sensor
- CU-ECC2** Cab climate Unit - Electrically controlled air conditioning with a carbon filter, sun, mist, and air quality sensor
- IMMOBIL** Immobiliser
- ALARM-E** Enhanced vehicle alarm - Thatcham H1 approved - Cab plus external sensor for body/trailer

■ Standard Equipment

□ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification.
The specification can vary from country to country.

- ISUNS-BS** Side sun visor - Driver & passenger side
- ISUNS-DS** Side sun visor - Driver-side
- ISUNF-RE** Electrically operated textile interior sun blind
- ISUNF-RM** Manually operated textile interior sun blind
- ADFS** Two extra DIN slots in front shelf - can be fitted with card or drawer available as an accessory
- BUPALARM** Reverse alarm
- RTOLL-PK** Road toll PREPARATION kit for trucks operating with "Toll Collect" in Germany
- LOADIND** Load indicator with central dashboard display
- REMC-MF** Multi-functio wireless remote control
- FIREXT3S** Fire extinguisher - 3kg mounted on the seat base
- WARNVEST** High visibility warning vest - No sleeves
- WARNTRI2** Roadside hazard warning triangle
- AIDKIT** First aid kit - Legal demand for EU markets including delivery to EU bodybuilder
- AIDKIT1B** First aid kit - Legal demand for trucks transiting Germany
- WARNLAMP** Portable warning lamp
- LAMP-IN** Inspection lamp
- BULBKIT** Bulb and fuse kit
- WRITEPAD** Writing pad
- DST-CF4** Driver seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
- DST-CF5** Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
- DST-CF6** Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar, heat and ventilation controls with integrated seatbelt
- SBD-RED** Seat belt colour - Red
- PST-BAS1** Passenger seat - Fixed non suspended fold up with seatbelt mounted on cab "B" post
- PST-CF4** Passenger seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
- PST-CF5** Passenger seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
- PST-STD2** Passenger seat - Fixed with backrest adjustment, non suspended with seatbelt mounted on cab "B" post
- PST-STD4** Passenger seat - Standard suspended with seatbelt mounted on cab "B" post
- SBPRE-PS** Passenger seat belt pretensioner
- ARMRE-BB** Armrests - Two on both driver & passenger seats
- ARMRE-DB** Armrests - Two on the driver seat
- ARMRE-PB** Armrests - Two on the passenger seat
- ARU-BAS** Armrest upholstery - Vinyl
- ARU-LEA** Armrest upholstery - Leather
- FMAT-RUB** Footwell floor mats - Rubber
- FMAT-TX2** Footwell floor mats - Two sets, Rubber and textile with an embossed pile supplied in the cab
- LBK70** Lower bunk 700 x2000 mm, fixed
- MATL-FI** Firm lower bunk pocket sprung mattress
- MATL-SF** Lower mattress - Flexi-zone semi-firm, pocket springs up to 100kg - 16 stone
- OLMAT-BA** Mattress overlay protector - 35mm thick
- OLMAT-PR** Mattress overlay protector - Premium 50mm thick
- TKB60F** Top bunk - Fixed foldable 600 x 1900mm
- TKB70F** Top bunk - Fixed foldable 700 x 1900mm
- SLCP-BAS** Sleeper control panel - Basic with switches for interior light, night heater, roof hatch and door lock

MODEL RANGE

NEW FM Battery Electric 6x4 Tractor - Full Air Suspension FM 64T E

<input type="checkbox"/> ETSB-F	Storage on engine tunnel - Central document box with two rear cup holders	<input type="checkbox"/> MIRCOMF	Electrically heated and operated main and wide angle mirrors and manually adjusted kerb view mirror on passenger side
<input type="checkbox"/> ETSB-FR	Storage on engine tunnel - Central document box with two rear cup holders & open storage pocket on cab rear wall	<input type="checkbox"/> MIRCOMFX	Electrically heated and operated -FMX- main and wide-angle mirrors with manually adjusted passenger kerb mirror, to increase direct vision to the side the main mirrors have no cowlings
<input type="checkbox"/> ETSB-R	Storage on engine tunnel - Open storage pocket on cab rear wall	<input type="checkbox"/> AMIR-F20	Auxiliary front view mirror with a 200mm radius
<input type="checkbox"/> RUS-BAS	Rear cab upper storage - 300 mm high	<input type="checkbox"/> SUNV-H	External smoke grey sunvisor
<input type="checkbox"/> RUS-HIG	Rear cab upper storage - 440 mm high - volume 245 litres	<input type="checkbox"/> AD-ROOF	Cab roof deflector - Adjustable
<input type="checkbox"/> REF-ICPK	Fridge - Engine tunnel mounted preparation kit	<input type="checkbox"/> AD-SIDEL	Cab side deflector - Long extension panels
<input type="checkbox"/> REFR-RUS	Fridge - 28 litre rear upper wall mounted with dividers	<input type="checkbox"/> AD-SIDES	Cab side deflector - Short extension panels
<input type="checkbox"/> MICRO-PK	Wiring preparation kit for microwave oven	<input type="checkbox"/> ADCF-F	Additional black edging on chassis side skirt
BOTH-D	Bottle holder - One under dashboard centre section	<input type="checkbox"/> HL-LED	Headlights - LED
<input type="checkbox"/> COFMA-PK	Coffee maker - Preparation kit.	<input type="checkbox"/> HLP-ST	Headlight protection
INLI-BAS	Interior light - White LEDs	<input type="checkbox"/> HLP-ST2	Mesh headlamp protection
<input type="checkbox"/> INLI-NL	Interior light - White and red nightlight LEDs without dimmer	<input type="checkbox"/> DRL-LED	Daytime running lights - V shaped
<input type="checkbox"/> INLI-NLD	Interior light - White and red nightlight LEDs with dimmer	<input type="checkbox"/> DRIVL2	Two spot lamps
<input type="checkbox"/> ARL-FLEX	Flexible reading lamps - Two "snake" type	UDRIVL	Auxiliary driving lights - Without
RH-EE	Fixed tinted glass sky window with emergency exit	FOGL-WC	Front fog lights
<input type="checkbox"/> RH-ER	Steel roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> CL-STAT	Static corner lights
<input type="checkbox"/> RH-ETR	Tinted glass roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> ASL-RF2	Integrated roof spotlights - Two LED spot lights in Globetrotter sign box
<input type="checkbox"/> RH-MTR	Tinted glass roof hatch - Manually operated, rear opening with emergency exit	<input type="checkbox"/> BEACOA2F	Roof beacons - Two front roof mounted amber LED
GLAS-TIN	Cab windows - Tinted	<input type="checkbox"/> BEACOA2R	Roof beacons - Two rear roof mounted amber LED
<input type="checkbox"/> AWIND-RF	Rear window	<input type="checkbox"/> BEACON-P	Roof beacons - switch and wiring preparation only
<input type="checkbox"/> SWIND-BB	Cab side window - On both sides behind 'B' post	<input type="checkbox"/> BEACONA4	Roof beacons - Four amber LED - two front/ two rear
<input type="checkbox"/> SWIND-PS	Cab side window - Left side behind 'B' post	<input type="checkbox"/> CABPT-R1	Single outlet for roof mounted accessories
<input type="checkbox"/> VANMIR	Vanity mirror - In front shelf	CABPT-R2	Twin outlets for roof mounted accessories.
<input type="checkbox"/> AS-FUS	Extra shelf in front compartments	<input type="checkbox"/> SPOTP-F	Spotlamp preparation in front, max 280W
<input type="checkbox"/> INFOT-PK	Preparation kit for the mounting of a flat screen TV in cab above the driver's door, includes bracket, electrical and speaker connections	<input type="checkbox"/> SPOTP-R	Spotlamp preparation on roof, max 280W
<input type="checkbox"/> SPOTP-RF	Spotlamp preparation on cab roof and in cab front, max 2x280W	<input type="checkbox"/> ROS-IL	Globetrotter roof sign illuminated
CAB EXTERIOR		<input type="checkbox"/> ROS-IL2	Preparation kit for illuminated roof sign with switch loose in cab, fit after registration
EXTL-BA2	Enhanced exterior finish - Satin Volvo badges, instep, bumper, and mirror housing in cab colour. Main grille in thunder grey. Aluminium step inserts. Sunvisor and bumper spoiler in cab colour if specified.	<input type="checkbox"/> ROS-ILP	Roof sign illumination preparation kit
BUMP-B	Front bumper - Plastic	<input type="checkbox"/> CSGN-GTR	Cab sign logo - FH "Globetrotter" or FH16 "Power"
<input type="checkbox"/> BUMP-B2	Front bumper - Steel	HORN-F1S	Horn - Air single tone - chassis mounted
BUMP-SP	Front bumper spoiler	HORN-R2S	Horn - Air - Two roof-mounted
<input type="checkbox"/> CTILTP-E	Electrically operated hydraulic cab tilt	ANT-CBR	Roof mounted antenna for CB radio, single aerial. Only Globetrotter cabs brings in extra DIN slots.
CTILTP-M	Manually operated hydraulic cab tilt	<input type="checkbox"/> ACCBR-AP	Front, middle & rear roof mounted accessory brackets
<input type="checkbox"/> FCABS-A	Front cab suspension - Air	<input type="checkbox"/> ACCBR-F	Front roof mounted accessory bracket
FCABS-M	Front cab suspension - Mechanical spring	<input type="checkbox"/> ACCBR-FM	Front & middle roof mounted accessory brackets
<input type="checkbox"/> RCABS-A	Rear cab suspension - Air	<input type="checkbox"/> ACCBR-FR	Front & rear roof mounted accessory brackets
RCABS-M	Rear cab suspension - Mechanical spring	<input type="checkbox"/> ACCBR-M	Middle roof mounted accessory bracket
<input type="checkbox"/> MIRCFCPS	Mirrors - Electrically heated and operated main and wide-angle with manually adjusted kerb view mirror on the passenger side and position camera in nearside mirror arm.	<input type="checkbox"/> ACCBR-R	Rear roof mounted accessory bracket
<input type="checkbox"/> MIRCFCPX	Mirrors - Electrically heated and operated - FMX- main and wide-angle with manually adjusted kerb view mirror on the passenger side and position camera in nearside mirror arm. To increase direct vision to the side the main mirrors have no cowlings	<input type="checkbox"/> ACCBR-RM	Rear & middle roof mounted accessory brackets
<input type="checkbox"/> MIRCMCP	Camera monitoring and mirrors - Electrically heated and operated main and wide-angle rear view cameras with manually adjusted passenger kerb and front mirror and passenger corner pedestrian camera.	LADDER	Ladder back of cab
<input type="checkbox"/> MIRCMS	Camera monitoring and mirrors - Electrically heated and operated main and wide-angle rear view cameras with manually adjusted passenger kerb and front mirror	<input type="checkbox"/> REFS-TW	White cab conspicuity markings by packed in cab
		<input type="checkbox"/> REFS-TY	Yellow cab conspicuity markings by packed in cab
SUPERSTRUCTURE PREPARATIONS			
5WM-ISOM	Fifth wheel mount - 50mm L profiles with 10mm ISO plate - 60mm high above chassis frame	5WT-J08	Fifth wheel - Jost JSK 37 cast
		5WT-J09	Fifth wheel - Jost JSK 42 cast
		5WT-SH	Fifth wheel - SAF-Holland/+GF+ SK-S 36.20 cast
		<input type="checkbox"/> 5WH150	Leg-height - 150 mm
		<input type="checkbox"/> 5WH185	Leg-height - 185 mm
		5WLM-B	Maintenance - Basic fifth wheel - standard top plate

■ Standard Equipment

□ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification.
The specification can vary from country to country.

MODEL RANGE

NEW FM Battery Electric 6x4 Tractor - Full Air Suspension FM 64T E

- 5WL-S1** Fifthwheel lubrication - Locking mechanism and top plate
- TCIND** Trailer connection indicator - Sensors for height, kingpin and coupling lock
- RDECK** Catwalk - Single plate and step
- RDECK-M** Catwalk - Extended with two plates and step
- SRWL-2RA** Chassis-mounted working lamps - Two amber rear-mounted LED lamps and 3 position switch
- SRWL-2RW** Chassis-mounted working lamps - Two white rear-mounted LED lamps and 3 position switch
- SRWL-PK** Chassis-mounted working lamps - Side work and reverse lamp preparation and 3 position switch - Max load 280W
- SWL-2RA** Chassis-mounted working lamps - Two ambe rear-mounted LED lamps
- SWL-2RW** Chassis-mounted working lamps - Two white rear mounted LED lamps
- SWL-PK** Chassis-mounted working lamps - Side work lamp preparation and 2 position switch - Max load 280W
- WL-TA1W** Coupling light - LED White
- WLC-H2A** Two H3/70W working lamps with amber coloured lens high mounted back of cab
- WLC-H2W** Working lamp back of cab - Two white LED high mounted at the back of cab
- WLC-PKH** Preparation kit, cables and switch for high mounted working lamps back of cab
- WLC-PKL** Preparation kit, cables and switch for low mounted working lamps back of cab
- WLC-PKLH** Preparation kit - cables and switch for low and high mounted working lamps back of cab.
- ECBB-HIG** Bodybuilder module - High level body electrical centre in dash input/output module
- BBCHAS1** One 7-pole connector for Body builder interface
- BBCHAS3** Three 7-pole connectors for Body builder interface
- BEPR-T2** Body builder electrical software preparation for tipper with remote control
- EXSTER** External steering control - Volvo dynamic steering and bodybuilder module prepared for external control system, installed and computer by bodybuilder
- TD-LED** Trailer detection with LED sensing
- AUXL-SPK** Electrical preparation kit - wiring and switch for snow plough lights
- TAILPRE2** Tail lift preparation kit, wireless remote operation
- TAILPREP** Taillift preparation kit - cab switch and warning in driver display
- AESW2** Two Body builder bistable electrical switches (marked AUX1 / AUX2)
- AESW2PK** 2 Body builder bistable el.switches (marked AUX1/AUX2) and prep. for 4 more switches
- AUXSW-4** Wiring for 4 extra switches (from Body builder electrical centre to switch positions)

DELIVERY SERVICES

- DRUT1** Driver utility app - "My Truck" - 1 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
- DRUT2** Driver utility app - "My Truck" - 2 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
- DRUT3** Driver utility app - "My Truck" - 3 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
- DRUT4** Driver utility app - "My Truck" - 4 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
- DRUT5** Driver utility app - "My Truck" - 5 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription